



32-125/0.25 (0.25 kW) MEI > 0.50 – impeller diameter = 133 mm

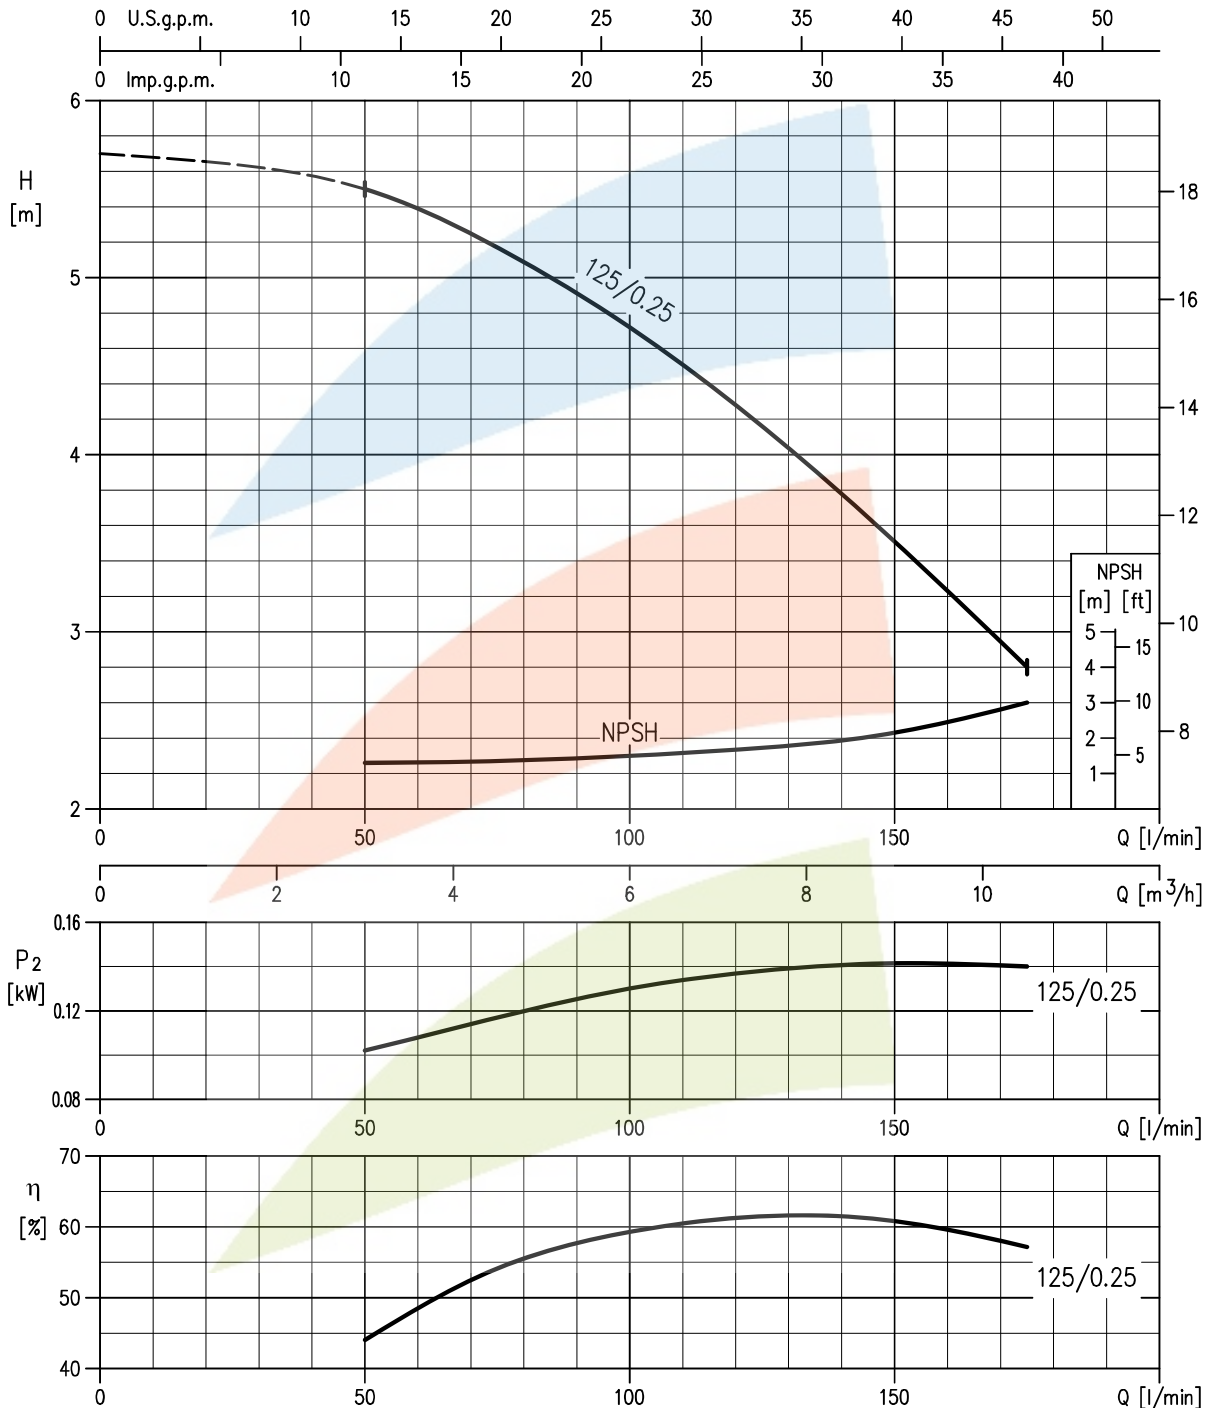


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

32-160/0.37R (0.37kW) MEI > 0.70 – impeller diameter = 151 mm
32-160/0.37 (0.37kW) MEI > 0.70 – impeller diameter = 166 mm

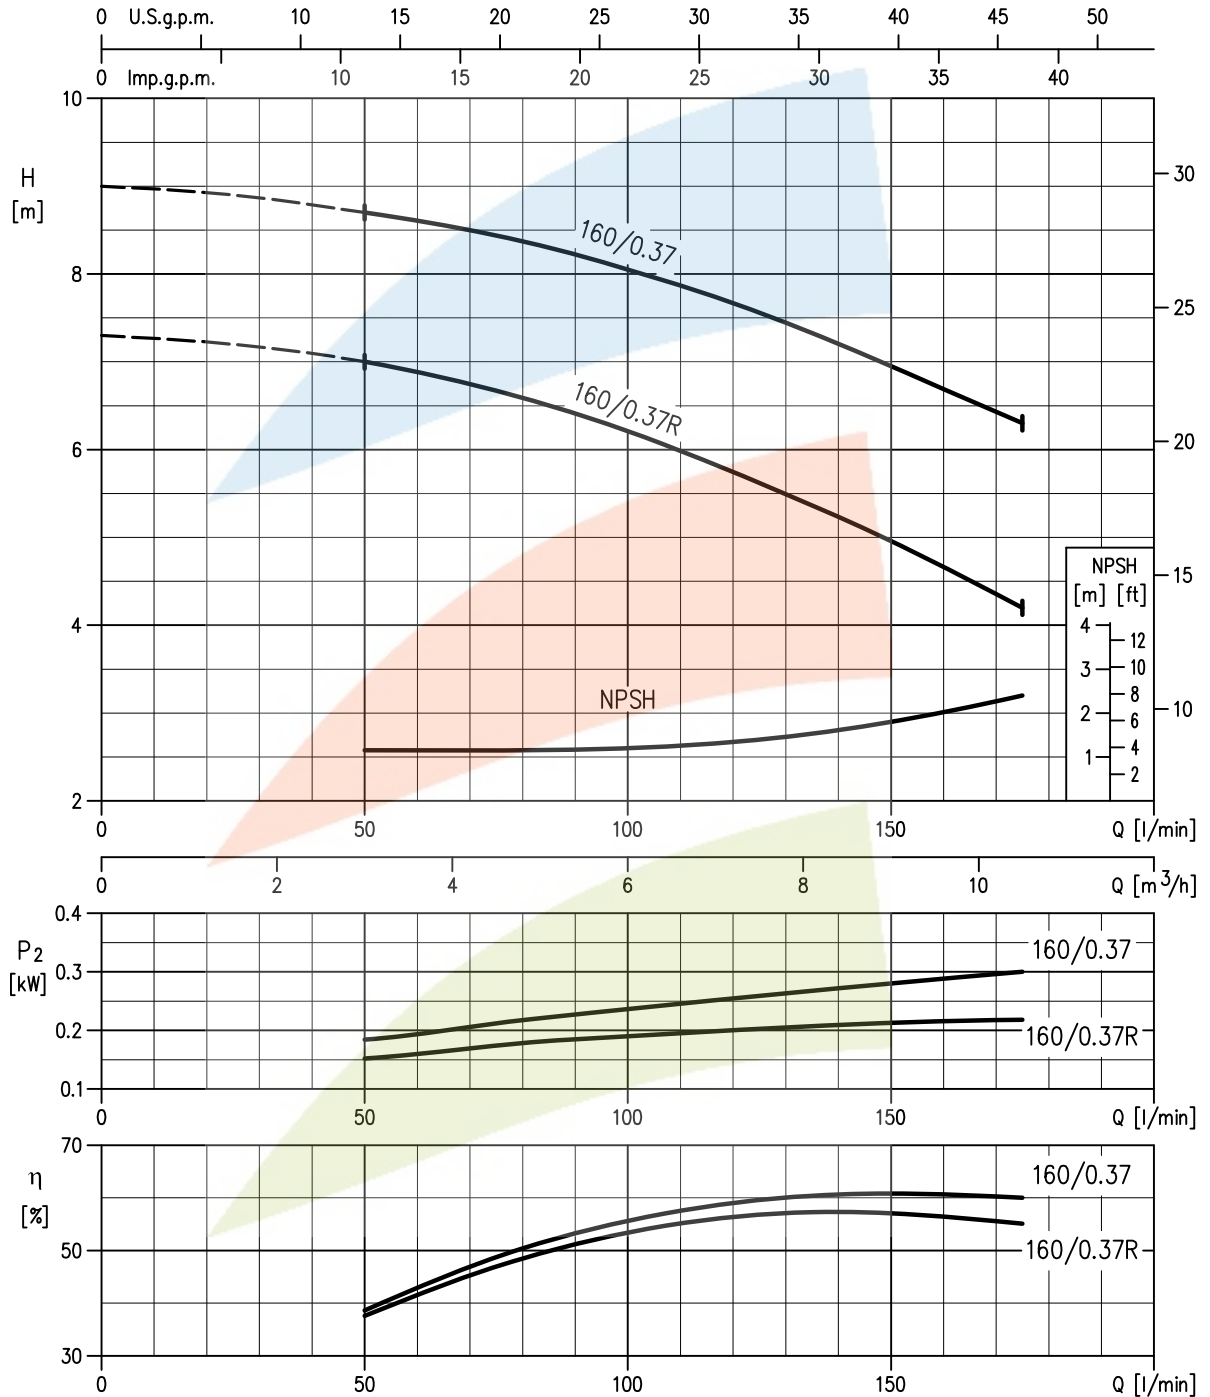


Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

32-200/0.55R (0.55 kW) MEI > 0.70 – impeller diameter = 186 mm
32-200/0.5 (0.55kW) MEI > 0.70 – impeller diameter = 200 mm
32-200/0.75 (0.55kW) MEI > 0.70 – impeller diameter = 224 mm

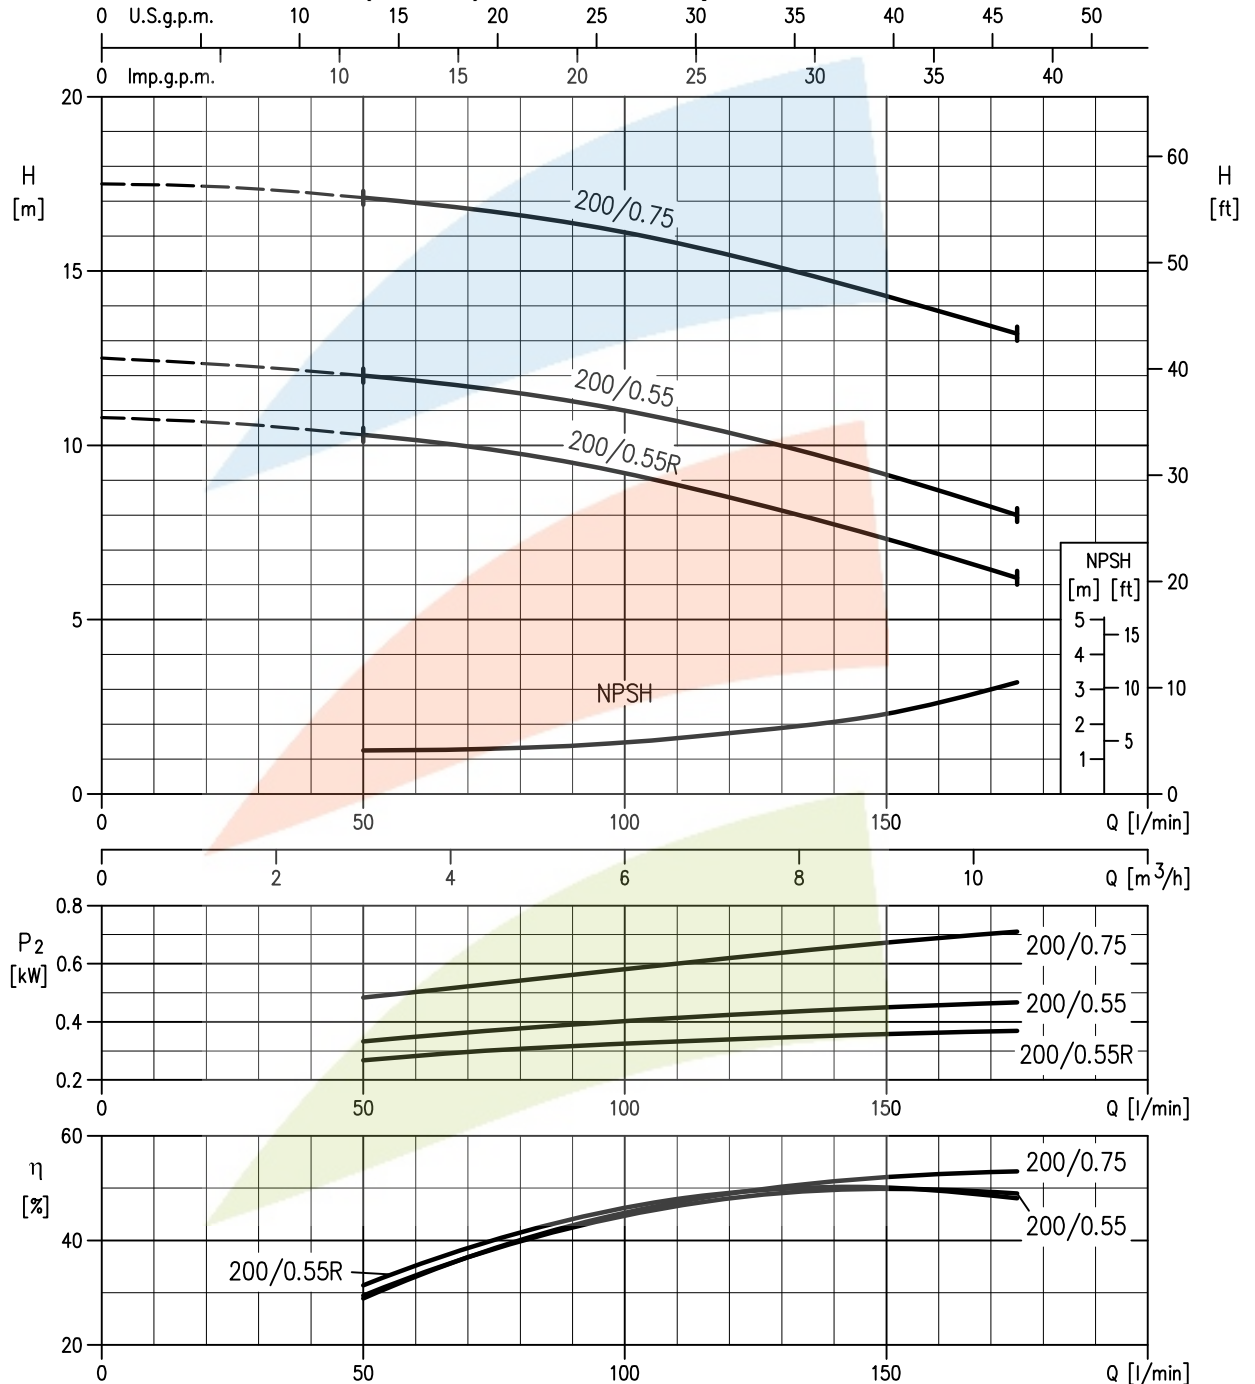


Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

40-125/0.37R (0.37 kW) MEI > 0.70 – impeller diameter = 125 mm
40-125/0.37 (0.37 kW) MEI > 0.70 – impeller diameter = 140 mm

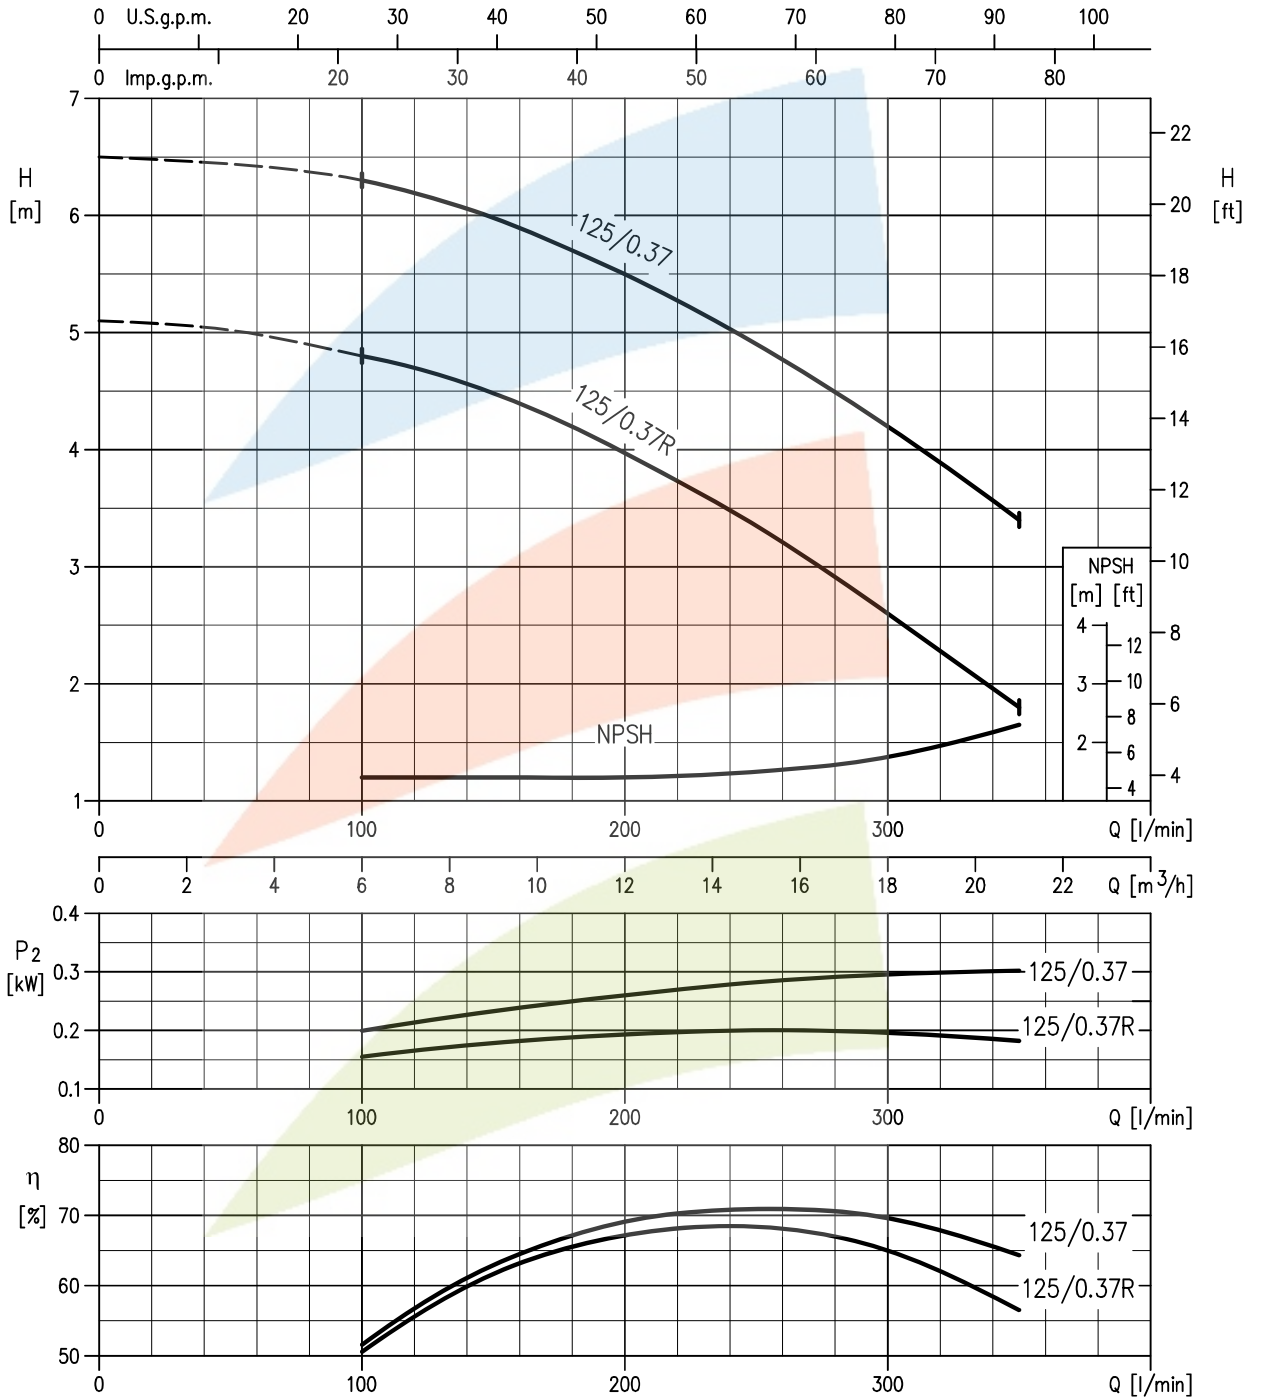


Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

40-160/0.55R (0.55 kW) MEI > 0.40 – impeller diameter = 151 mm
40-160/0.55 (0.55 kW) MEI > 0.40 – impeller diameter = 166 mm

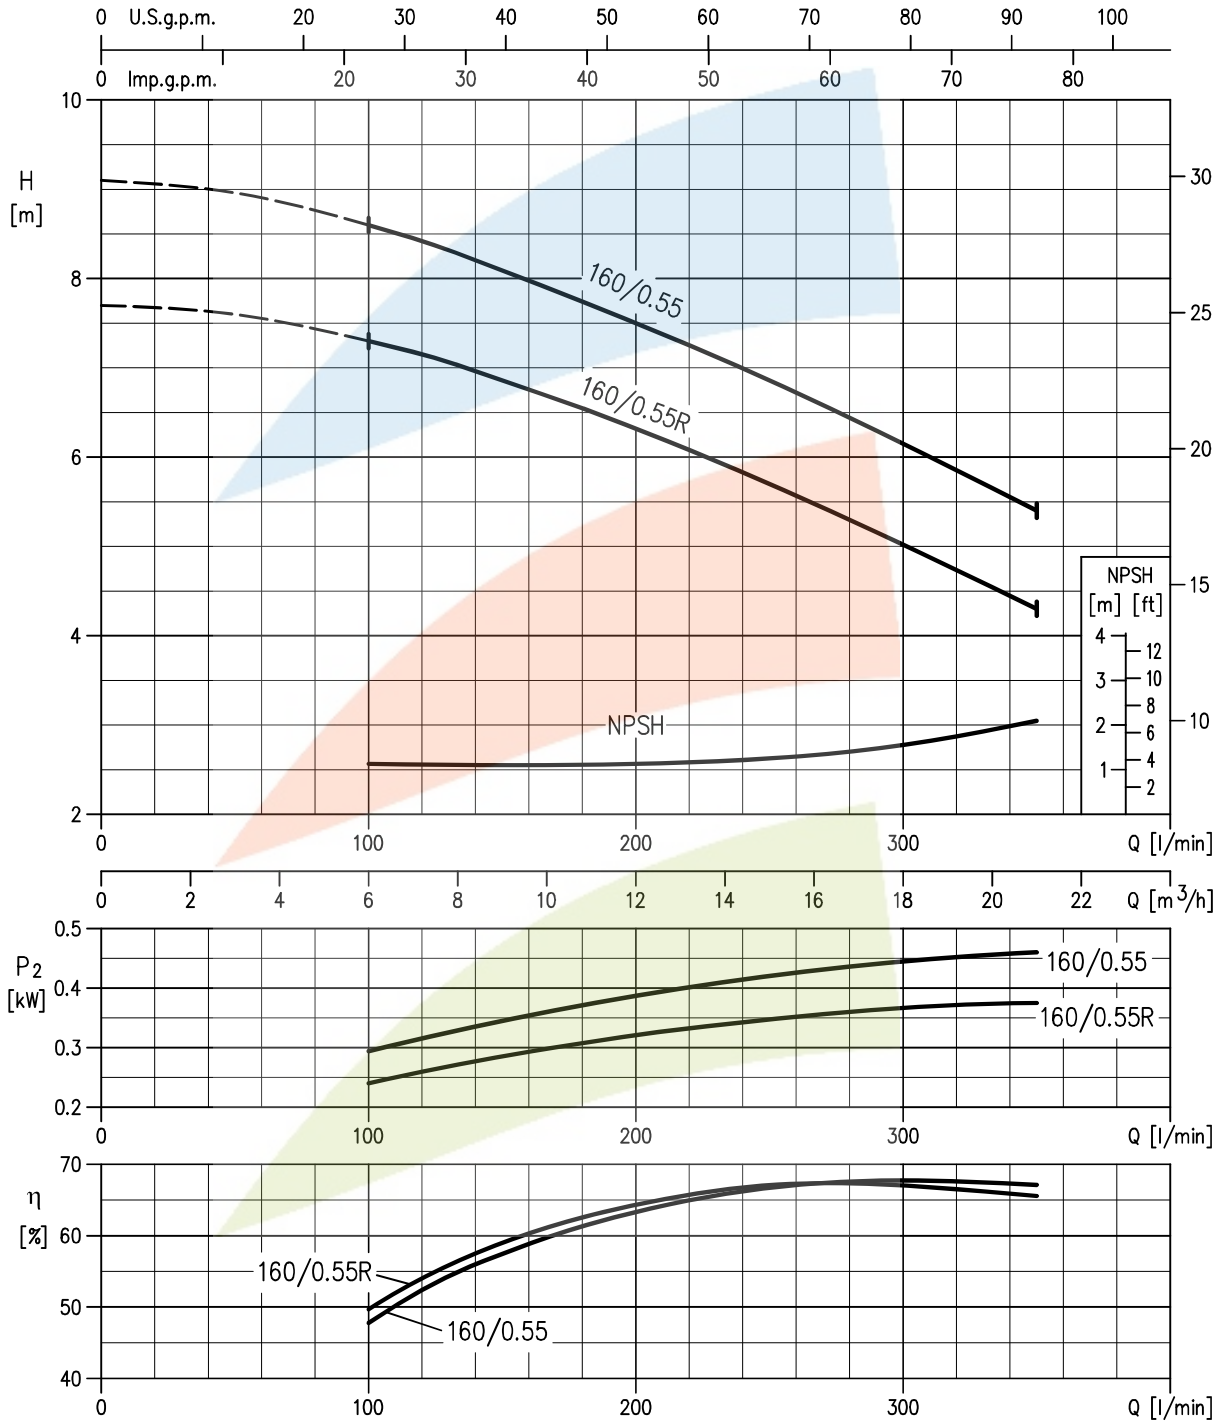


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

40-200/1.1R (1.1 kW) MEI > 0.70 – impeller diameter = 183 mm
 40-200/1.1 (1.1 kW) MEI > 0.70 – impeller diameter = 200 mm
 40-200/1.5 (1.5 kW) MEI > 0.70 – impeller diameter = 224 mm

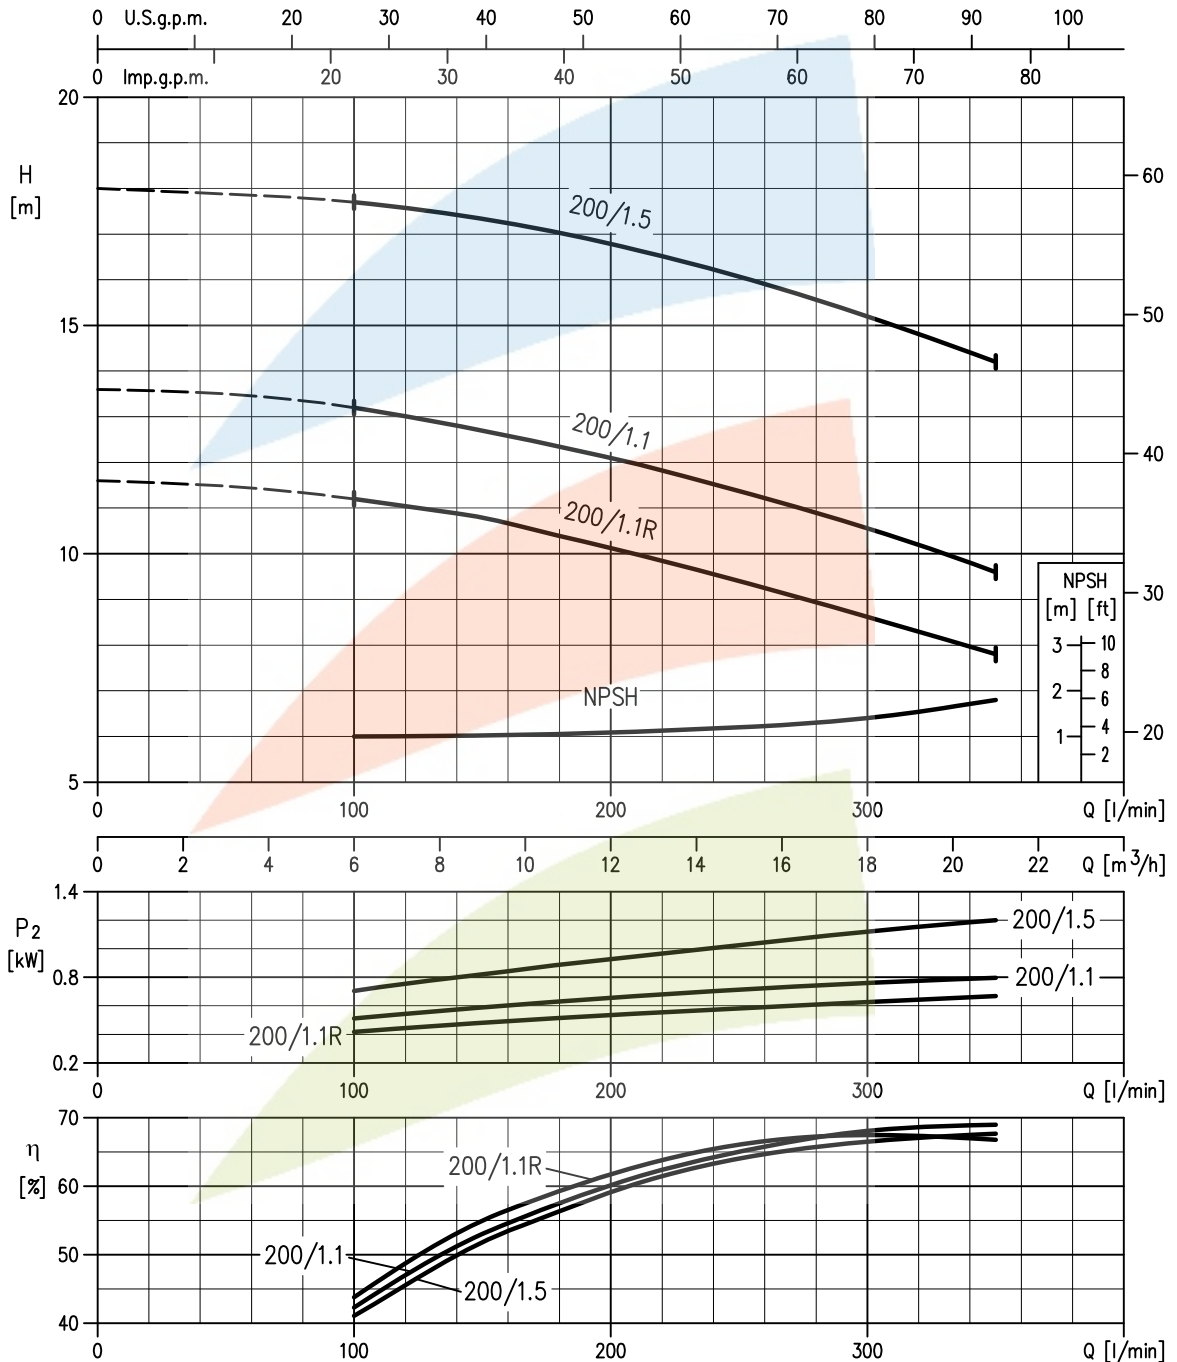


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

50-125/0.55R (0.55 kW) MEI > 0.40 – impeller diameter = 131 mm
 50-125/0.55 (0.55 kW) MEI > 0.40 – impeller diameter = 140 mm

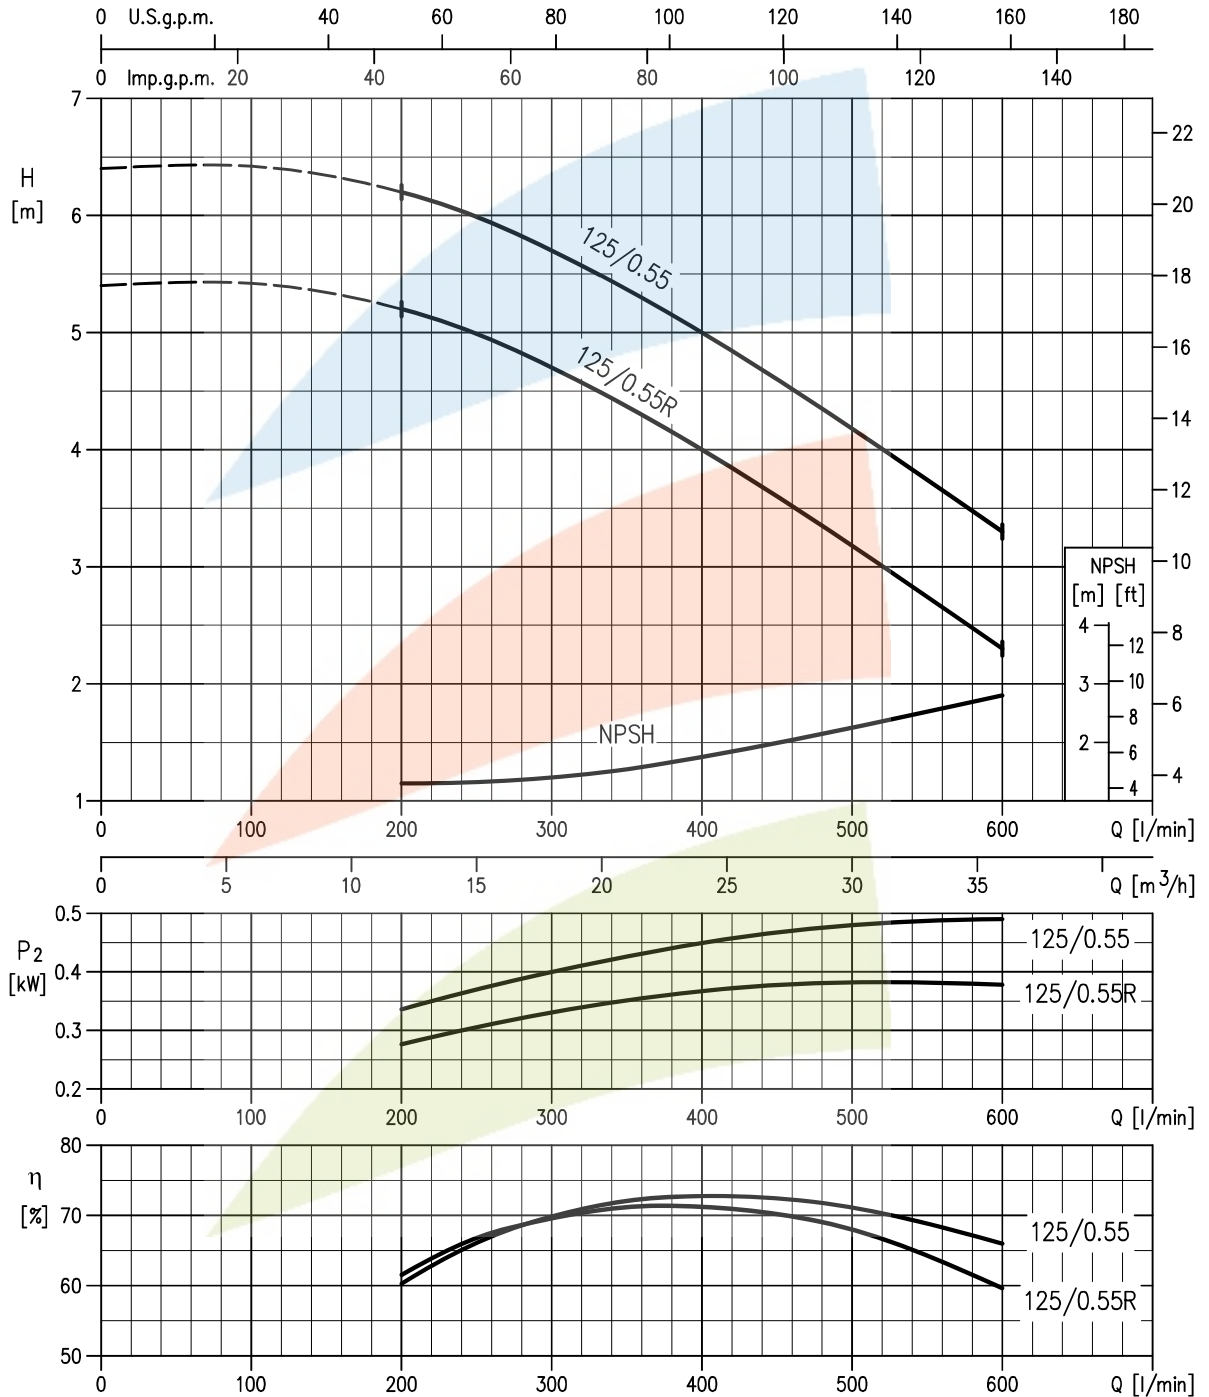


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

50-160/1.1R (1.1 kW) MEI > 0.40 – impeller diameter = 154 mm
 50-160/1.1 (1.1 kW) MEI > 0.40 – impeller diameter = 166 mm

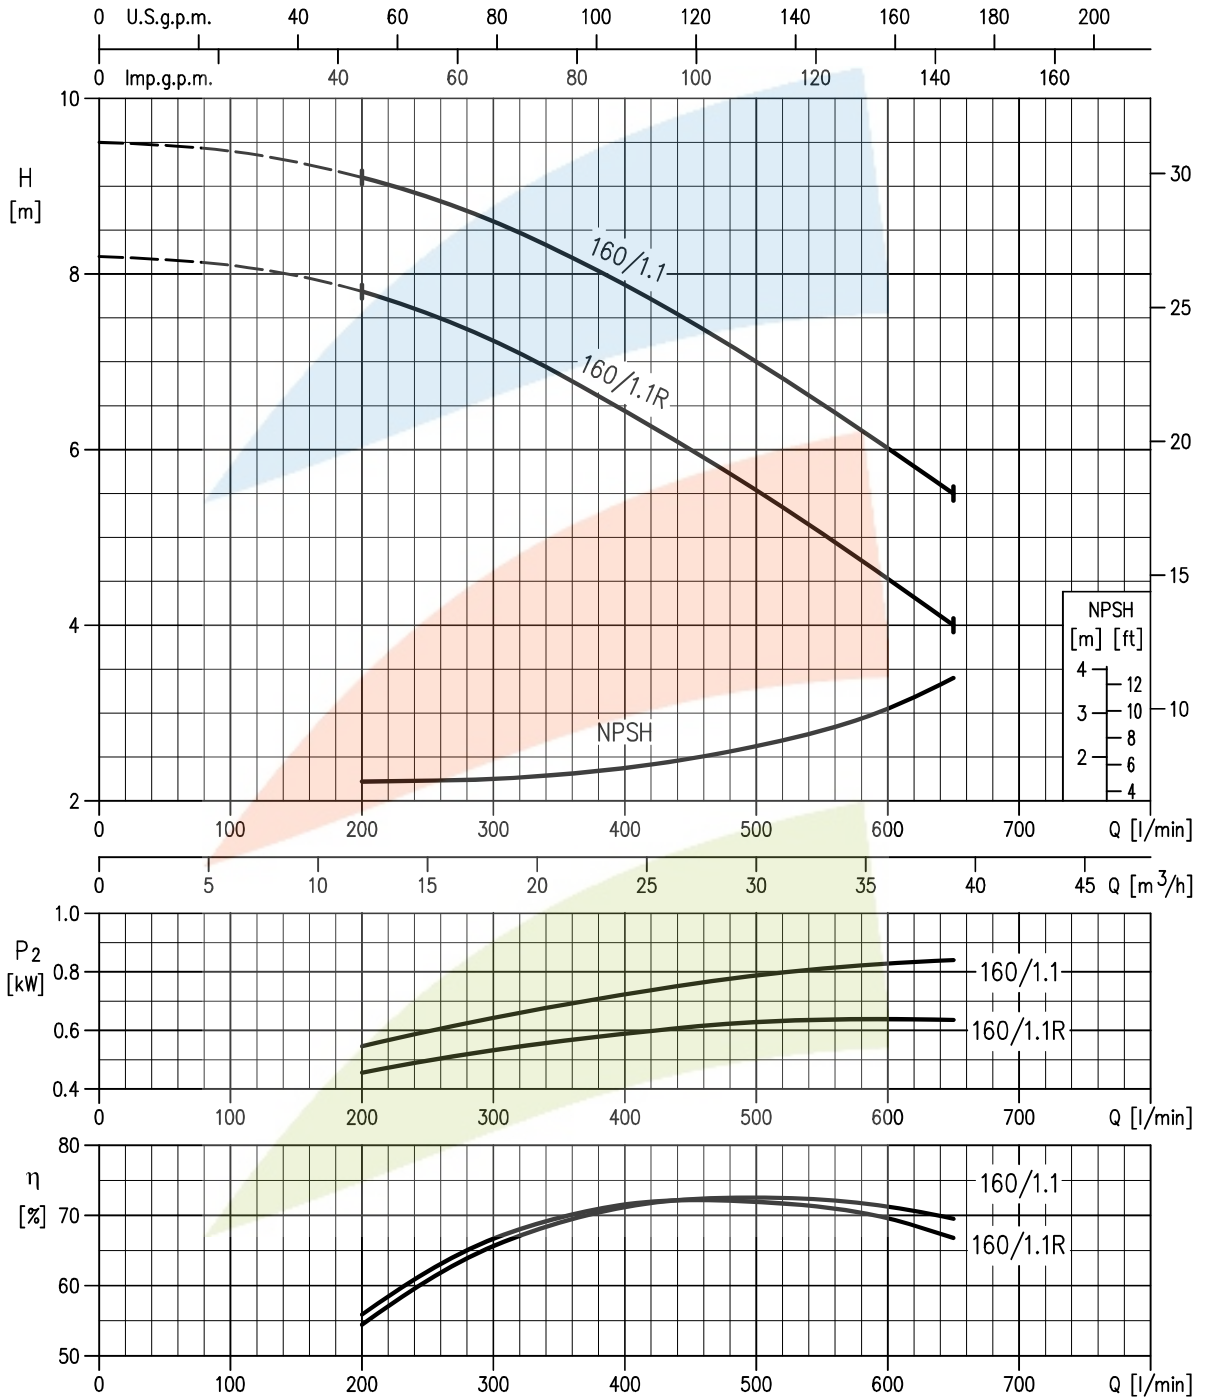


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

50-200/1.5R (1.5 kW) MEI > 0.60 – impeller diameter = 191 mm
 50-200/1.5 (1.5 kW) MEI > 0.60 – impeller diameter = 200 mm
 50-200/2.2 (2.2 kW) MEI > 0.60 – impeller diameter = 224 mm

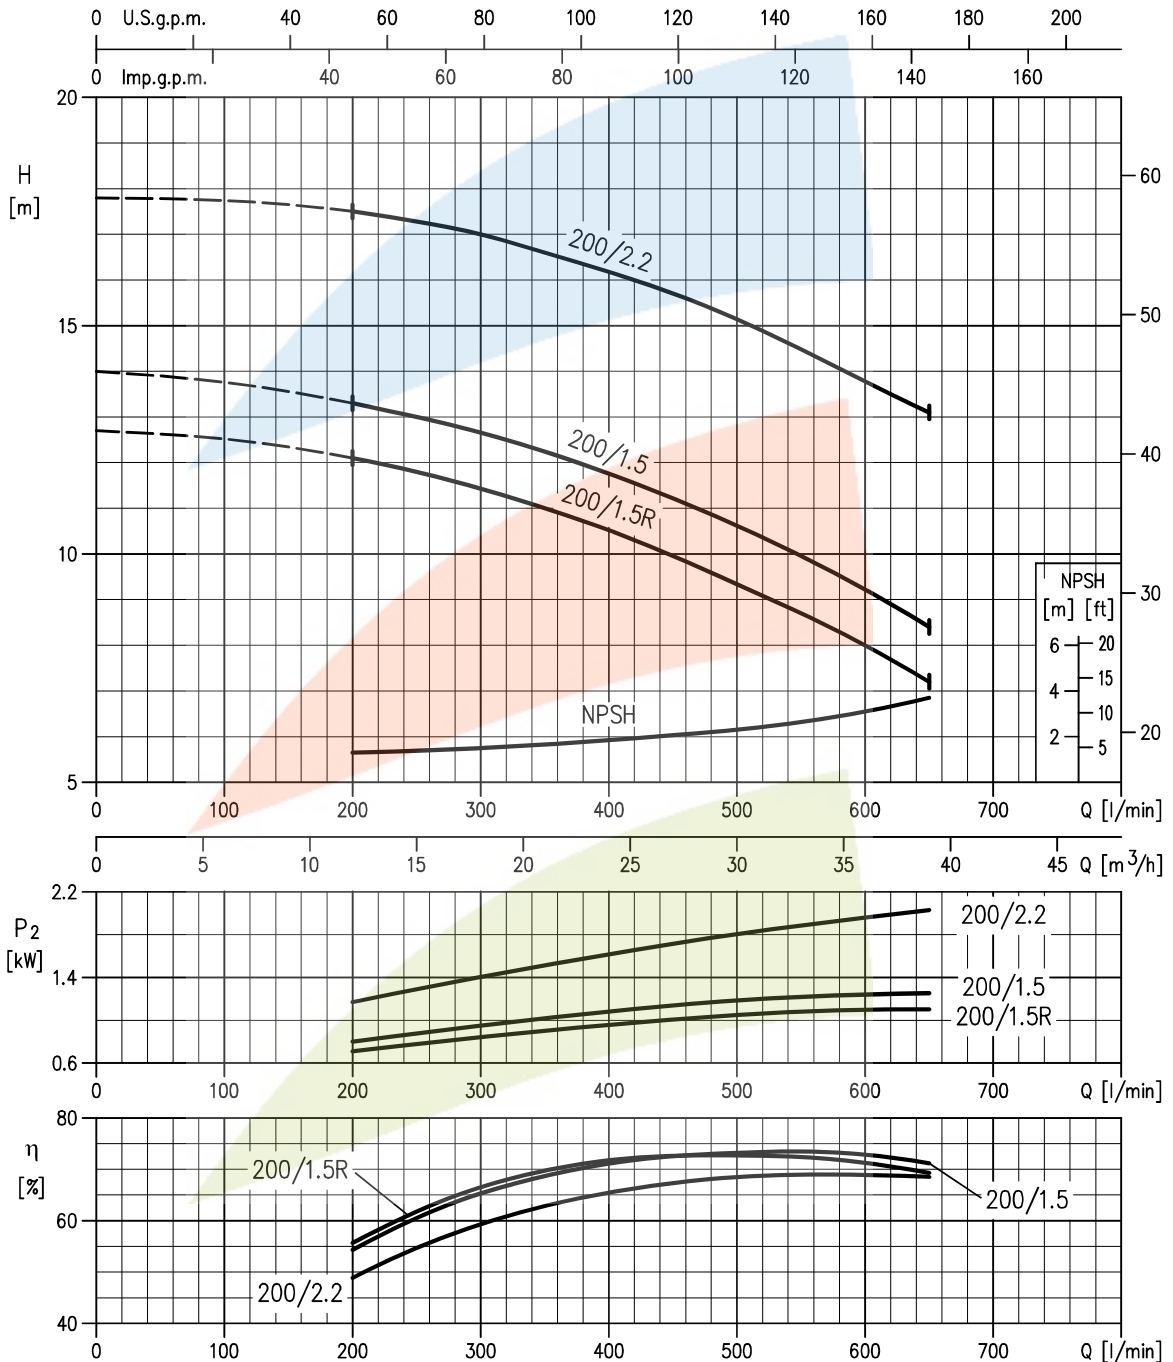


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

65-125/0.55 (0.55 kW) MEI > 0.50 – impeller diameter = 128 mm
 65-125/0.75 (0.75 kW) MEI > 0.50 – impeller diameter = 138 mm
 65-125/1.1 (1.1 kW) MEI > 0.50 – impeller diameter = 149 mm

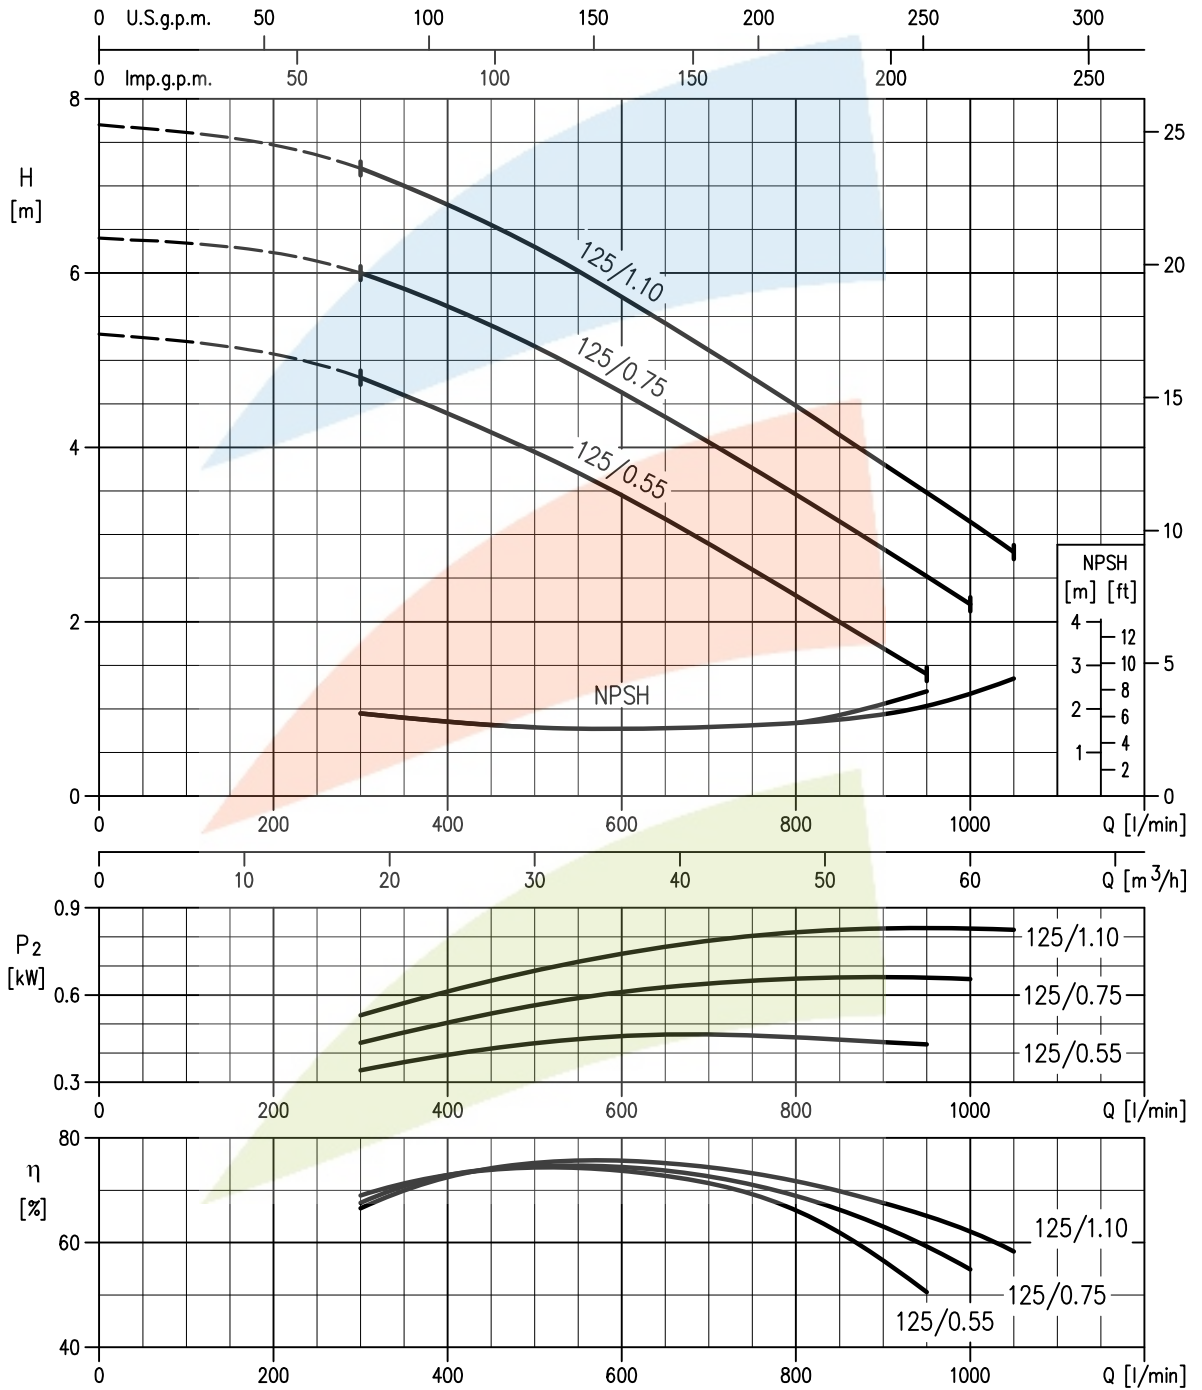


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

65-160/1.1 (1.1 kW) MEI > 0.70 – impeller diameter = 161 mm
 65-160/1.5 (1.5 kW) MEI > 0.70 – impeller diameter = 168 mm
 65-160/2.2 (2.2 kW) MEI > 0.70 – impeller diameter = 178 mm

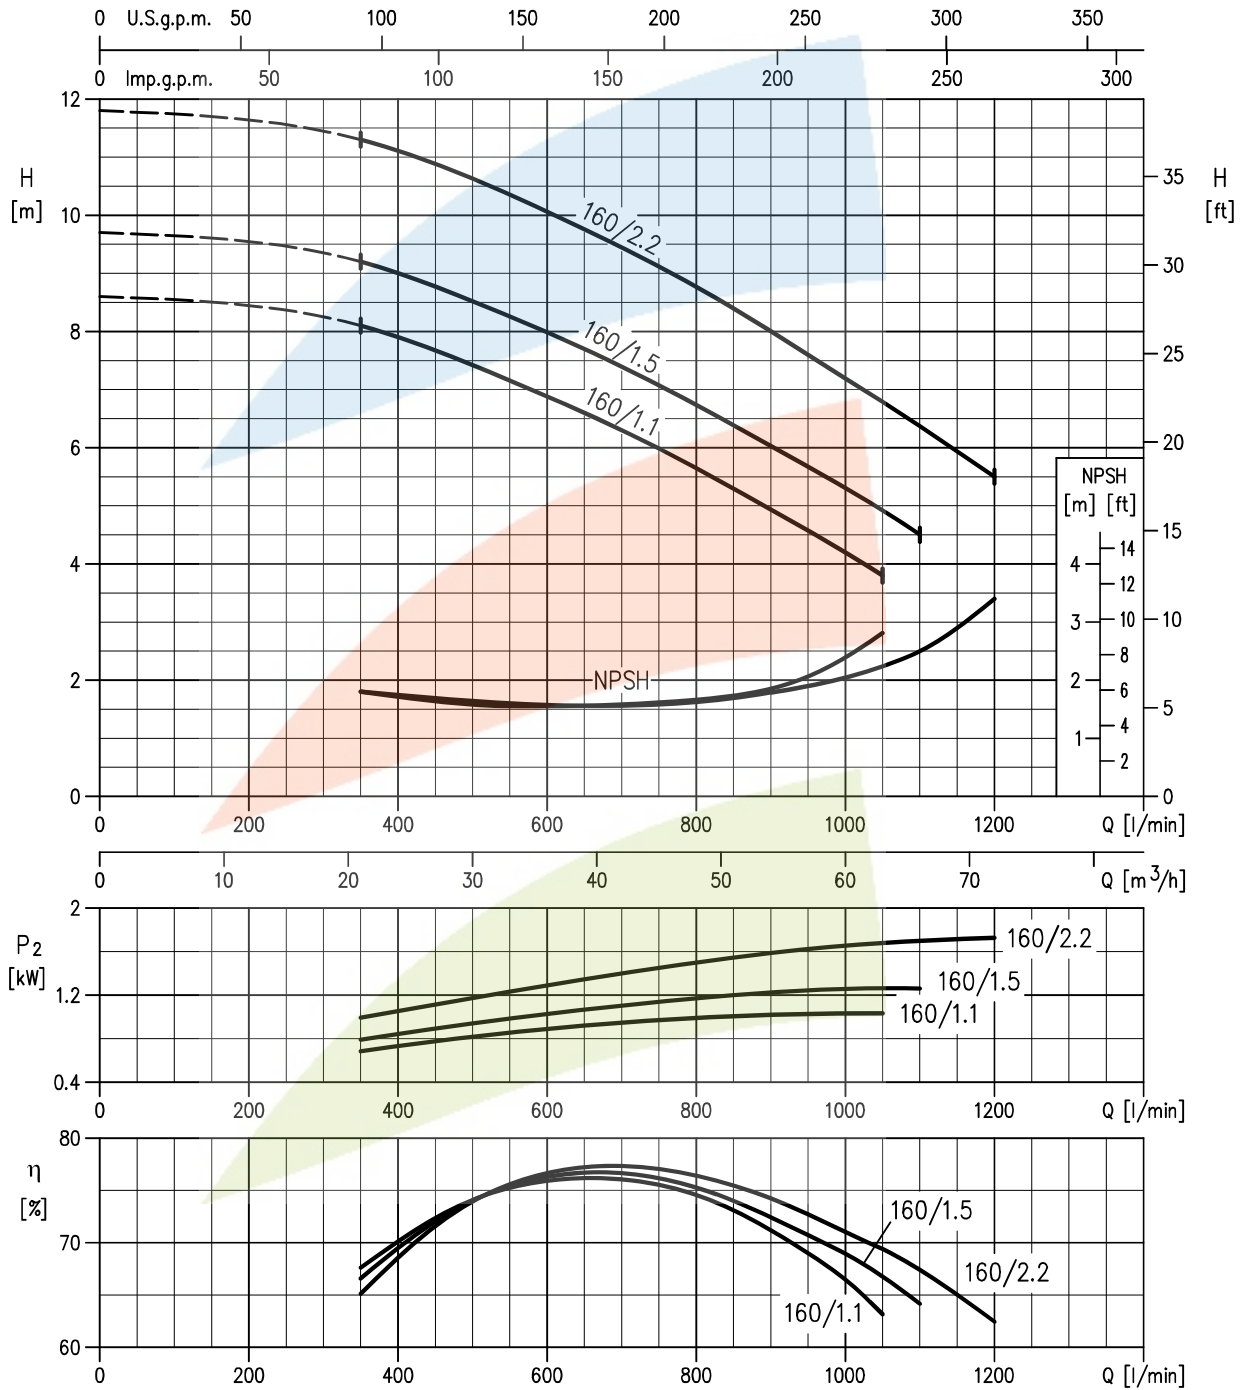

Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

65-200/2.2R (2.2 kW) MEI > 0.70 – impeller diameter = 190 mm
 65-200/2.2 (2.2 kW) MEI > 0.70 – impeller diameter = 201 mm
 65-200/3.0 (3.0 kW) MEI > 0.70 – impeller diameter = 212 mm

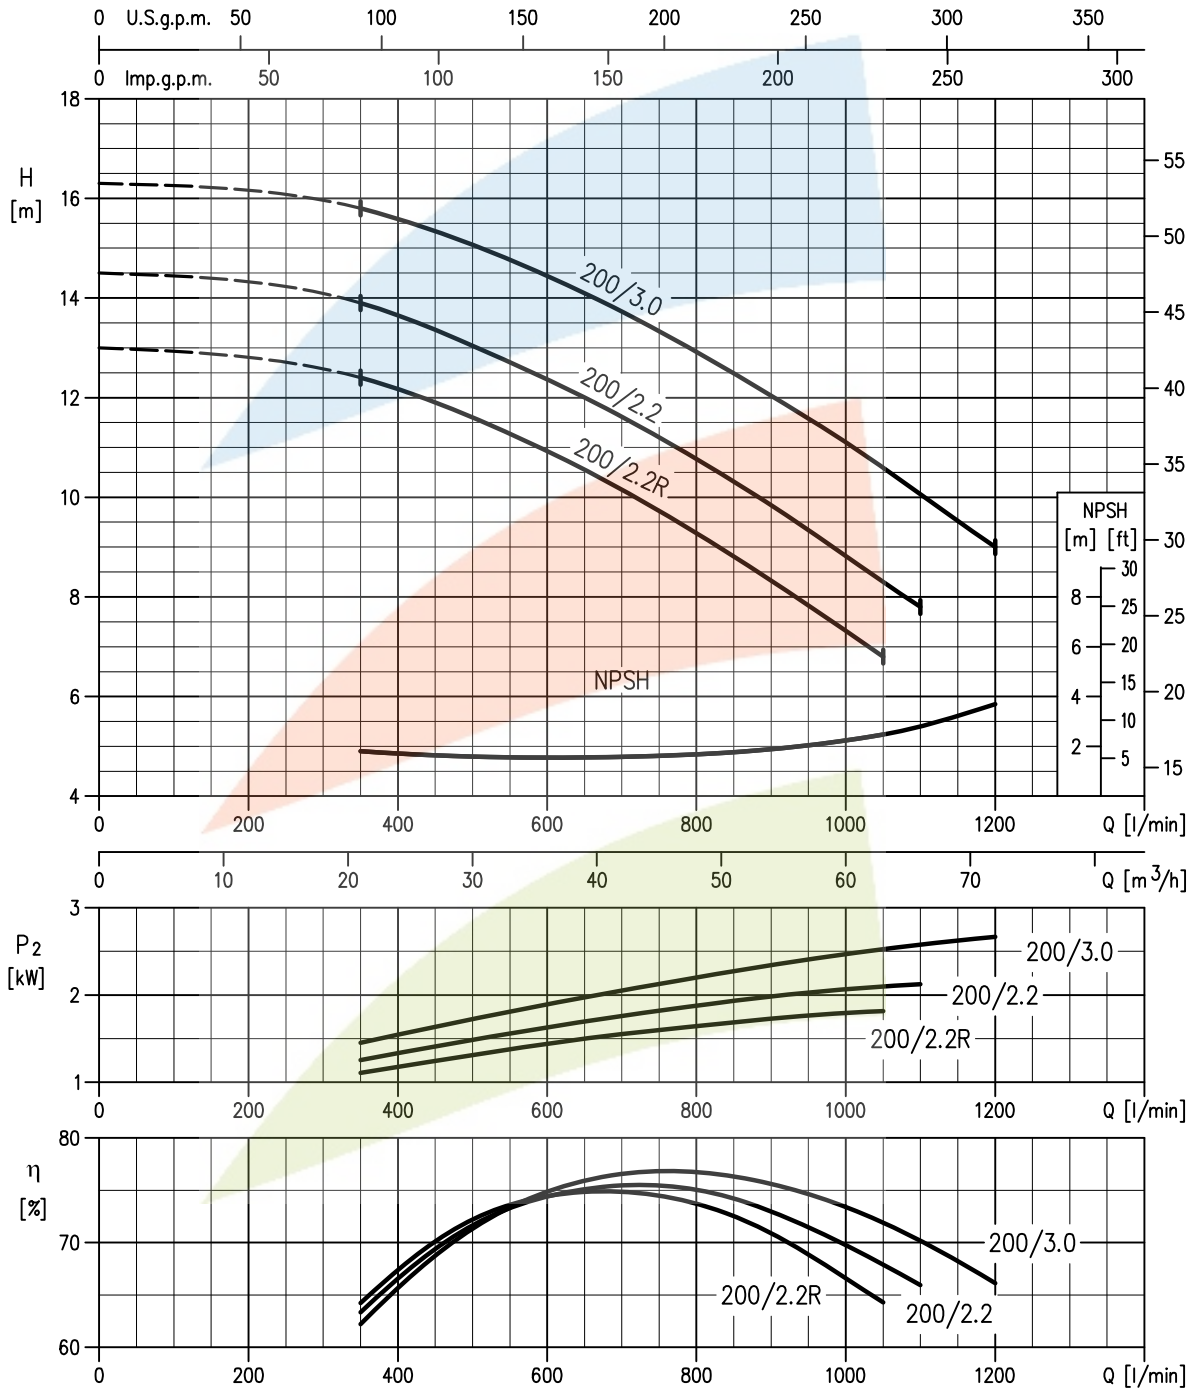

Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A