



AGA 0.60 (0.45 kW) - Impeller diameter = 130 mm

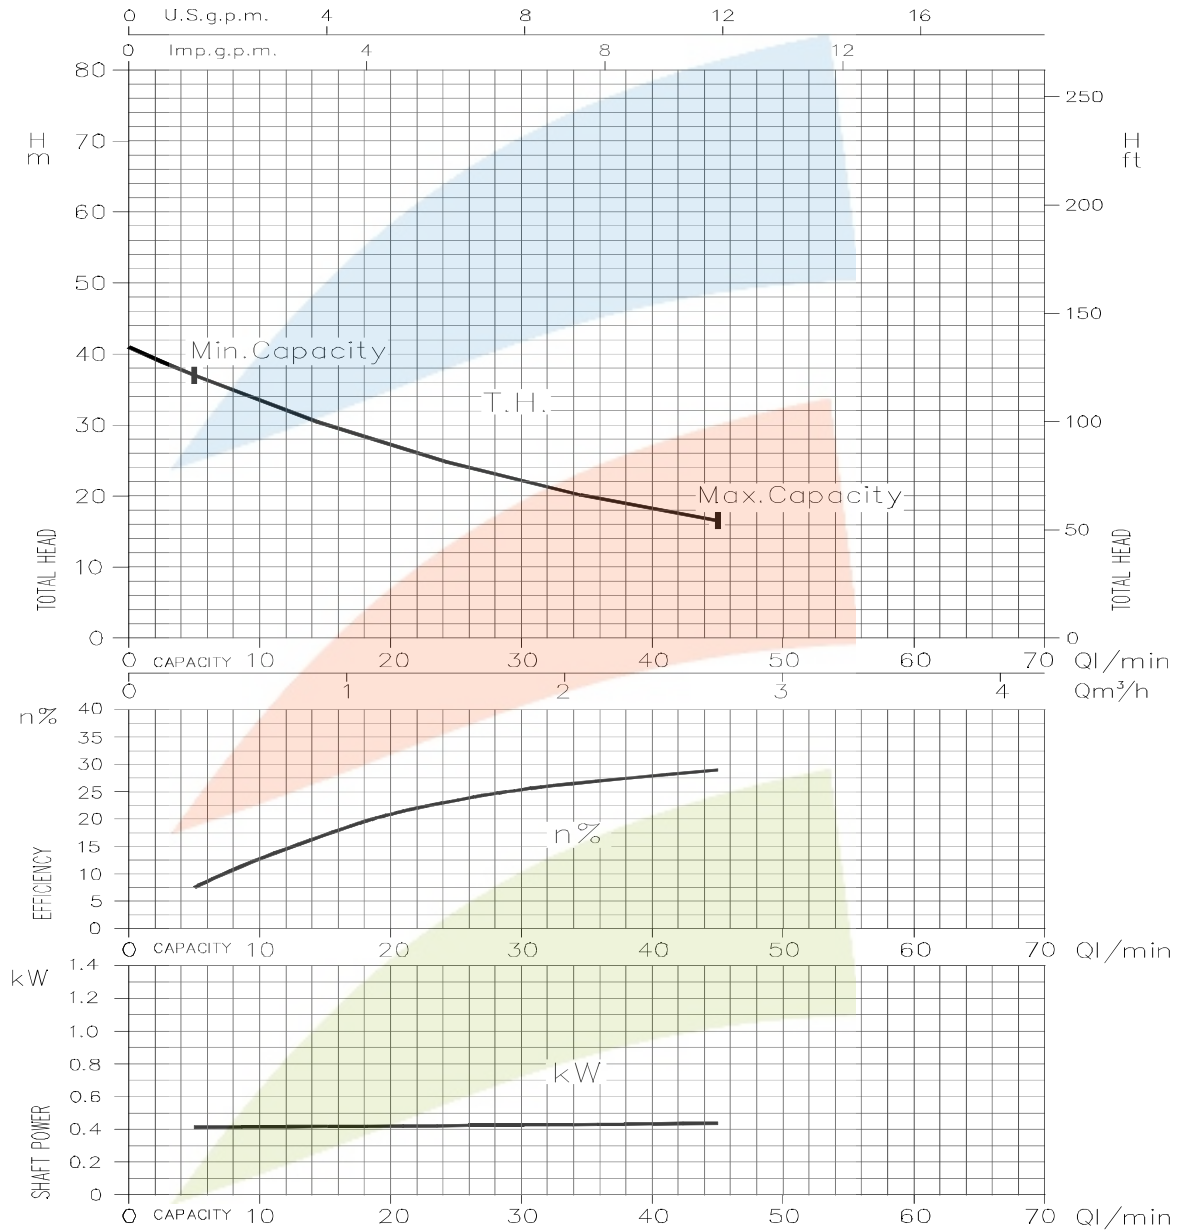


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGA 0.75 (0.55 kW) - Impeller diameter = 130 mm

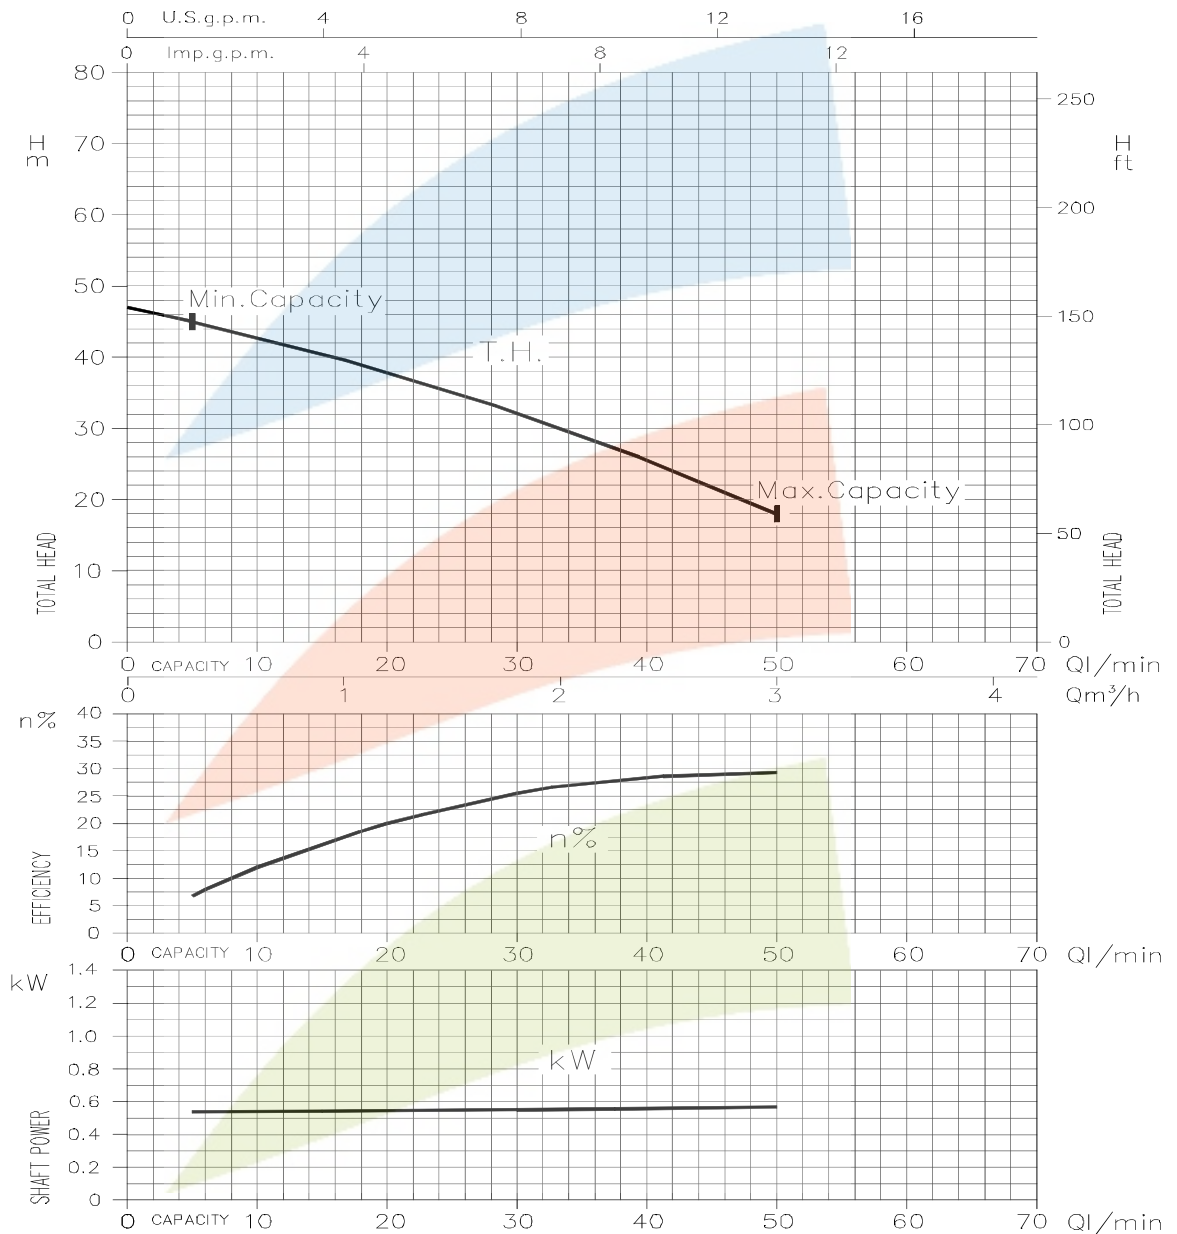


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGA 1.00 (0.75 kW) - Impeller diameter = 130 mm

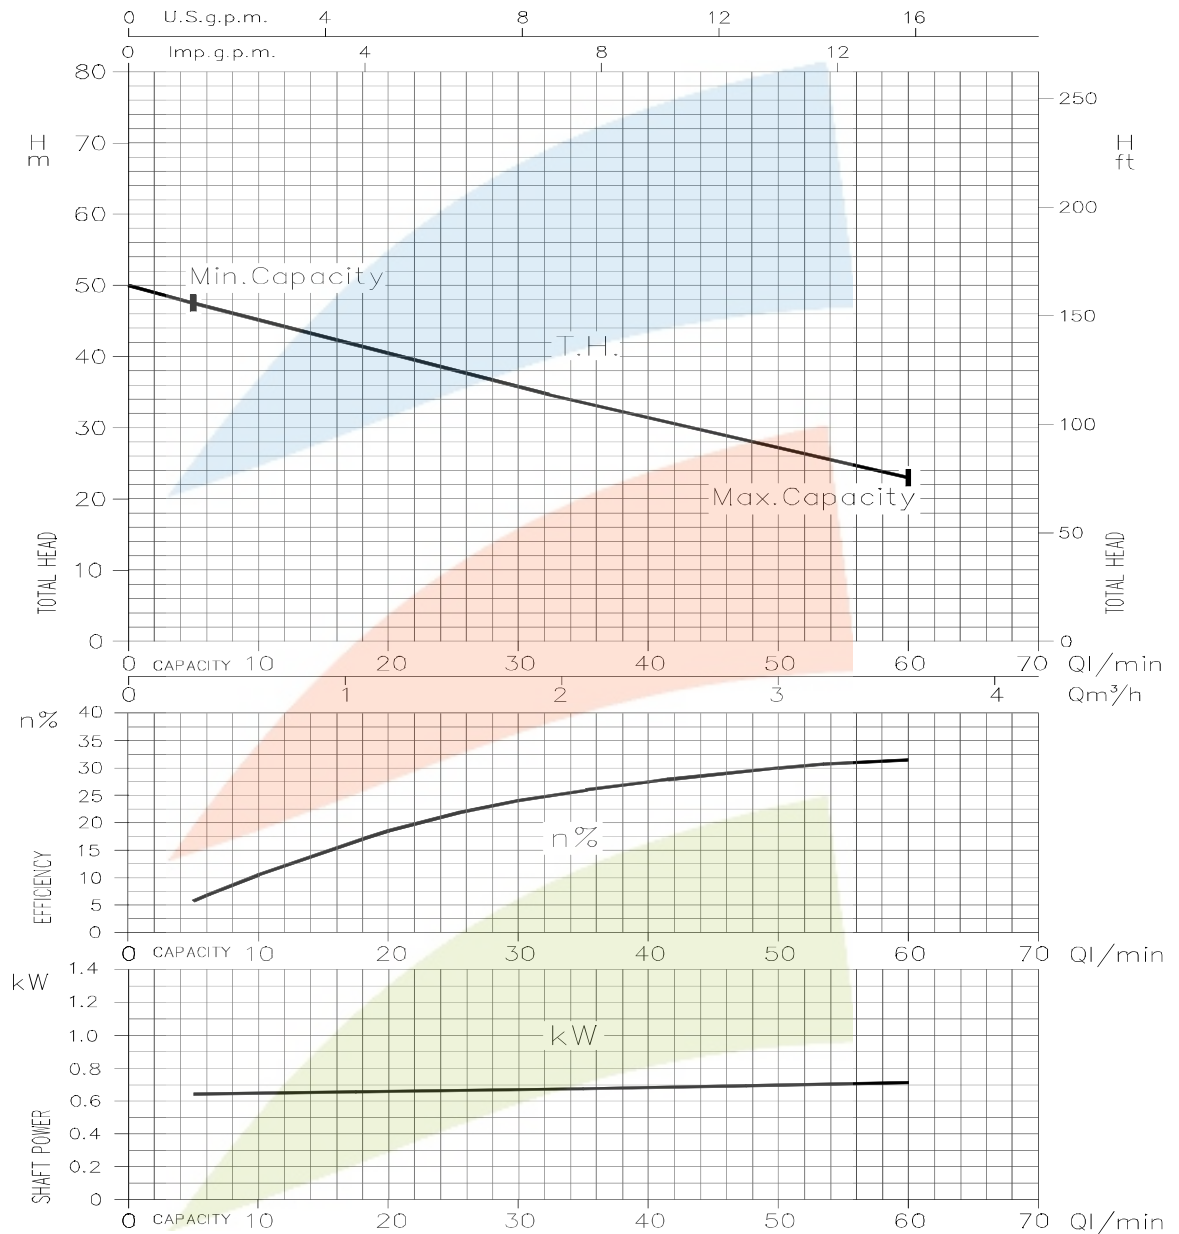


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGA 1.50 (1.1 kW) - Impeller diameter = 143 mm

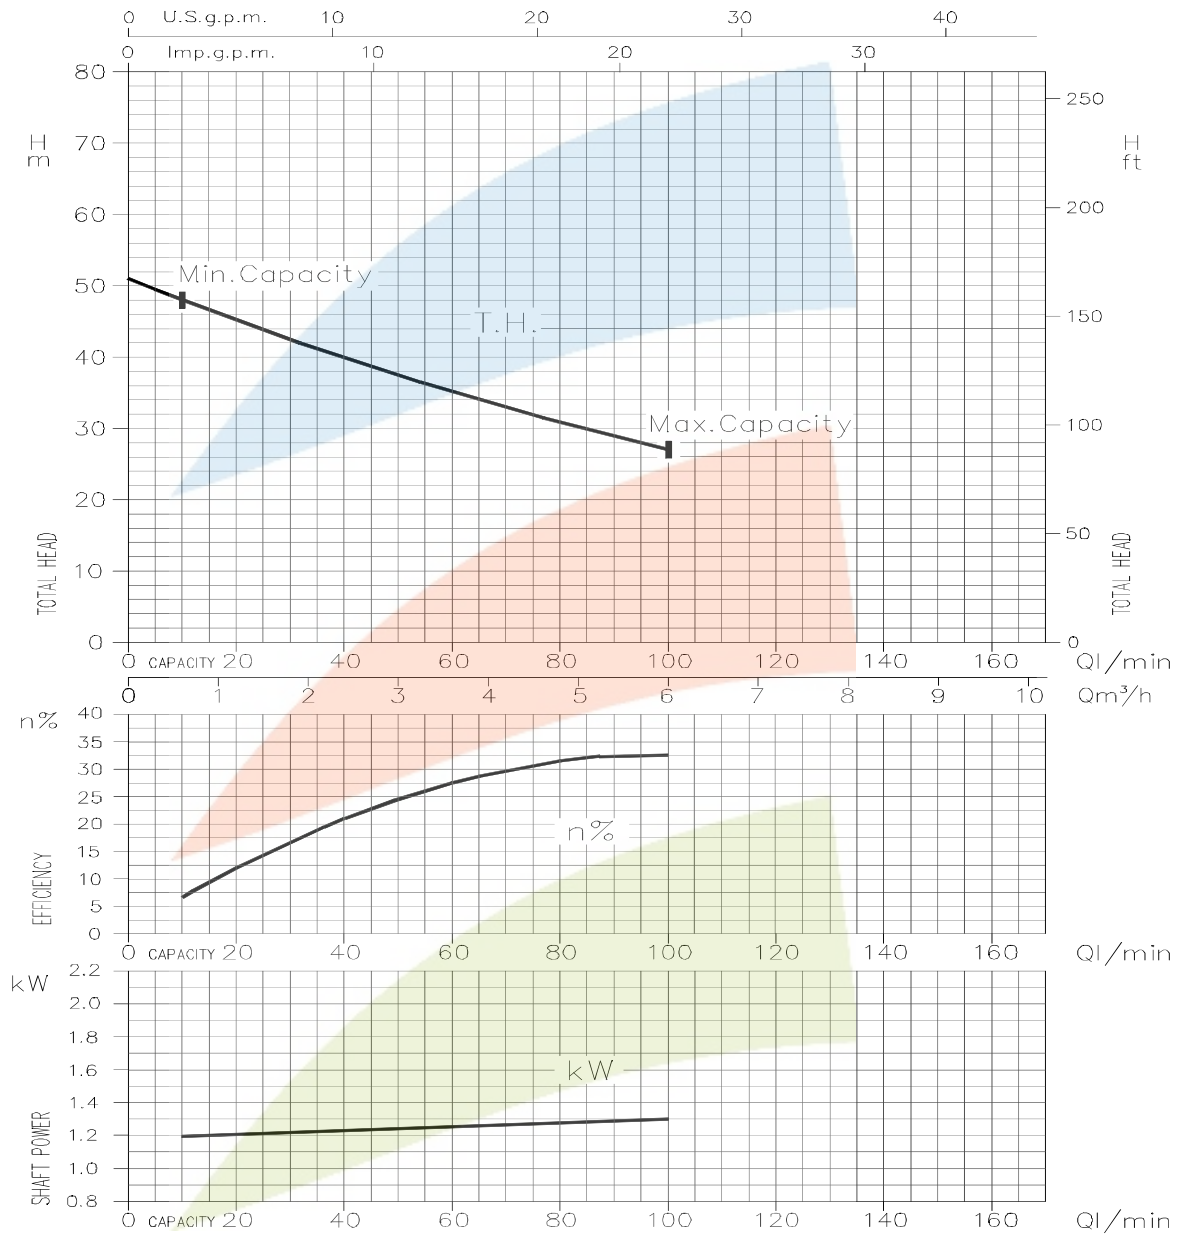


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGA 2.00 (1.5 kW) - Impeller diameter = 157 mm

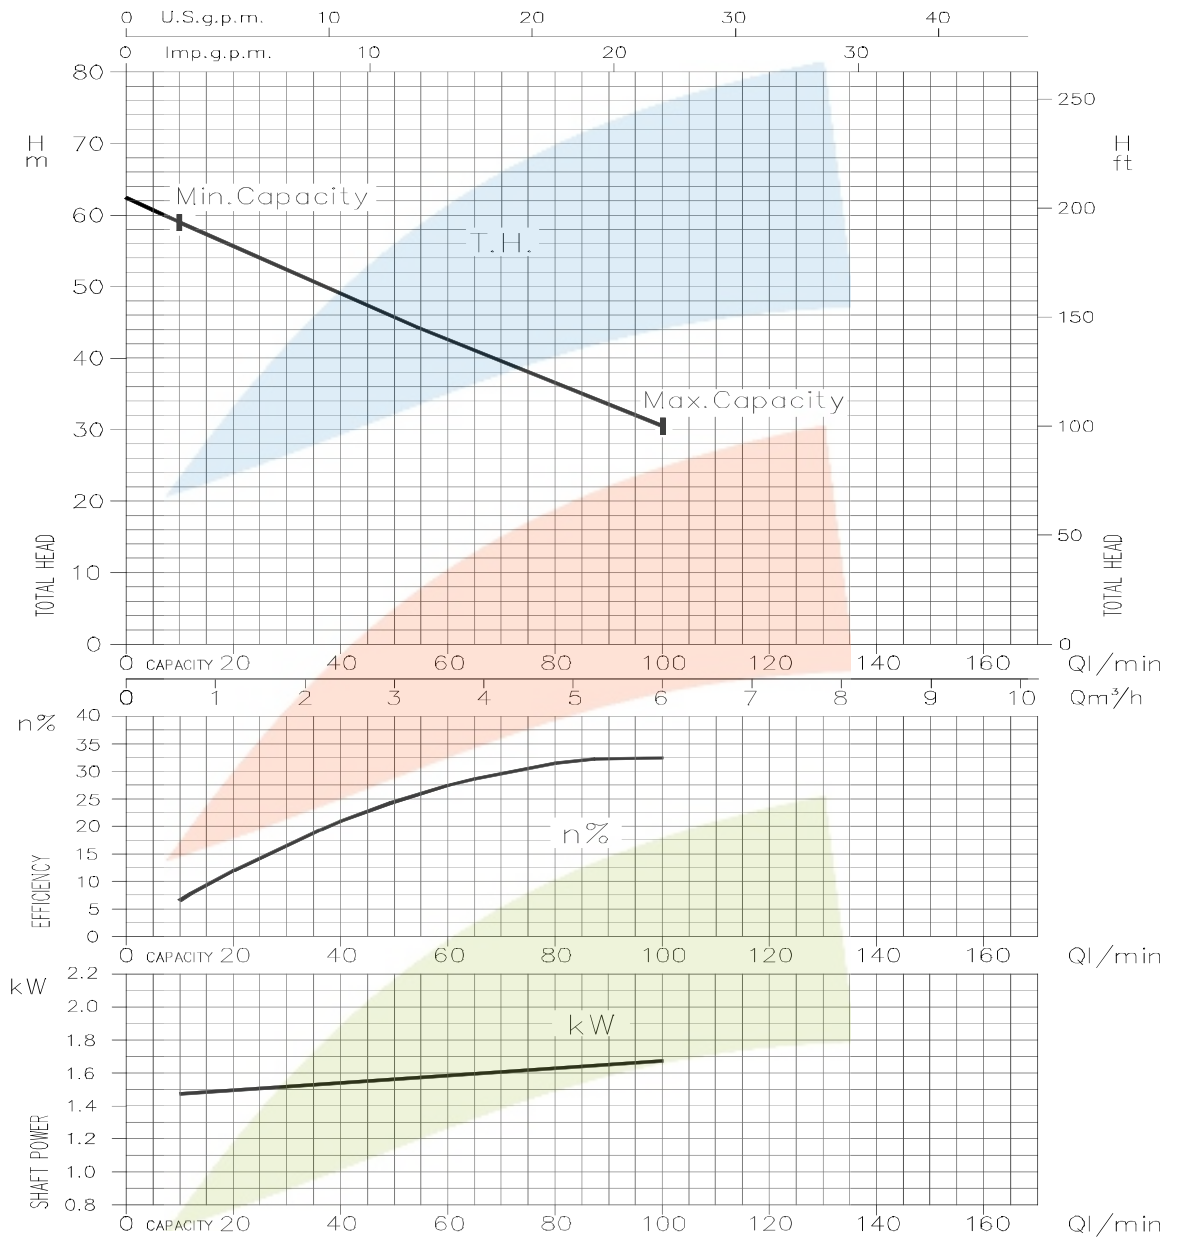


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGA 3.00 (2.2 kW) - Impeller diameter = 164 mm

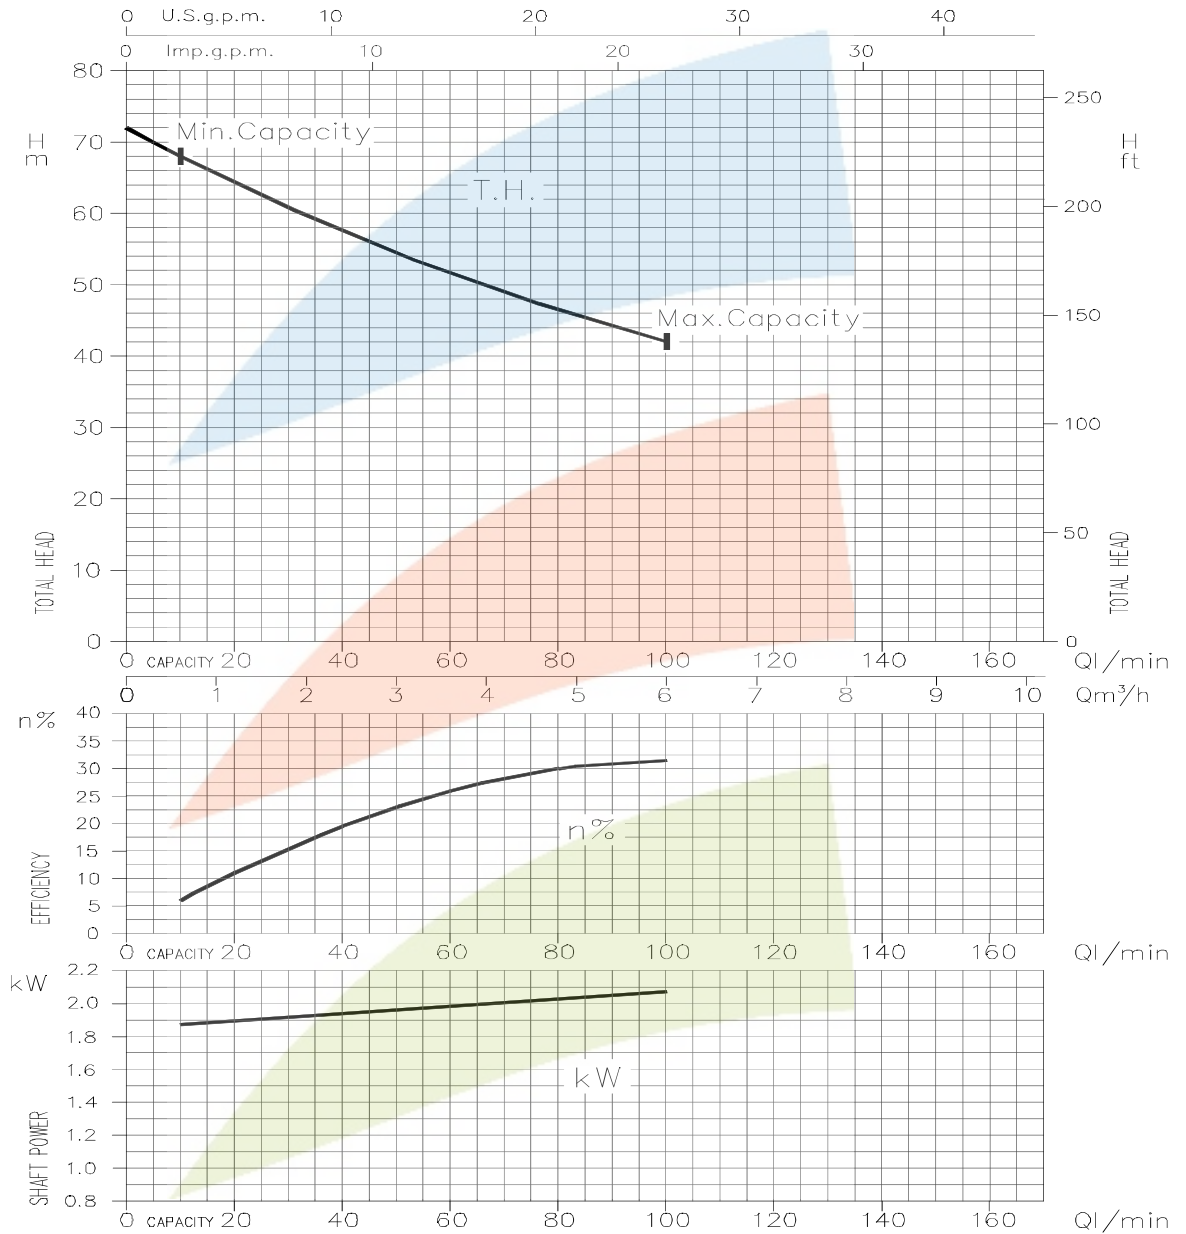


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGC 1.50 (1.1 kW) - Impeller diameter = 143 mm

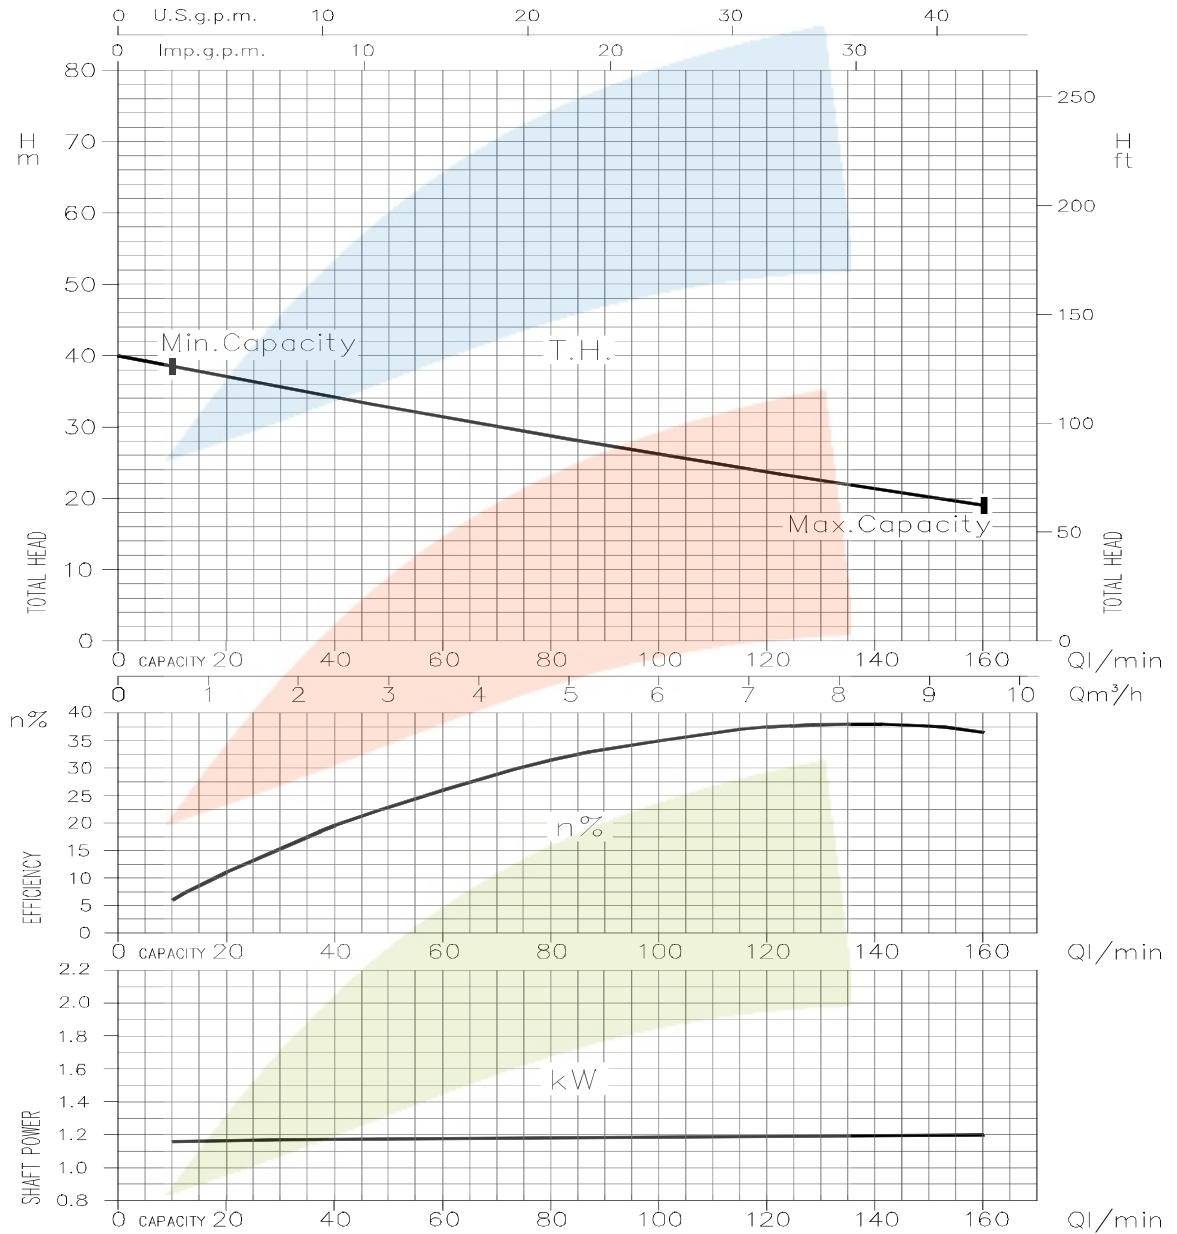


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGC 2.00 (1.5 kW) - Impeller diameter = 157 mm

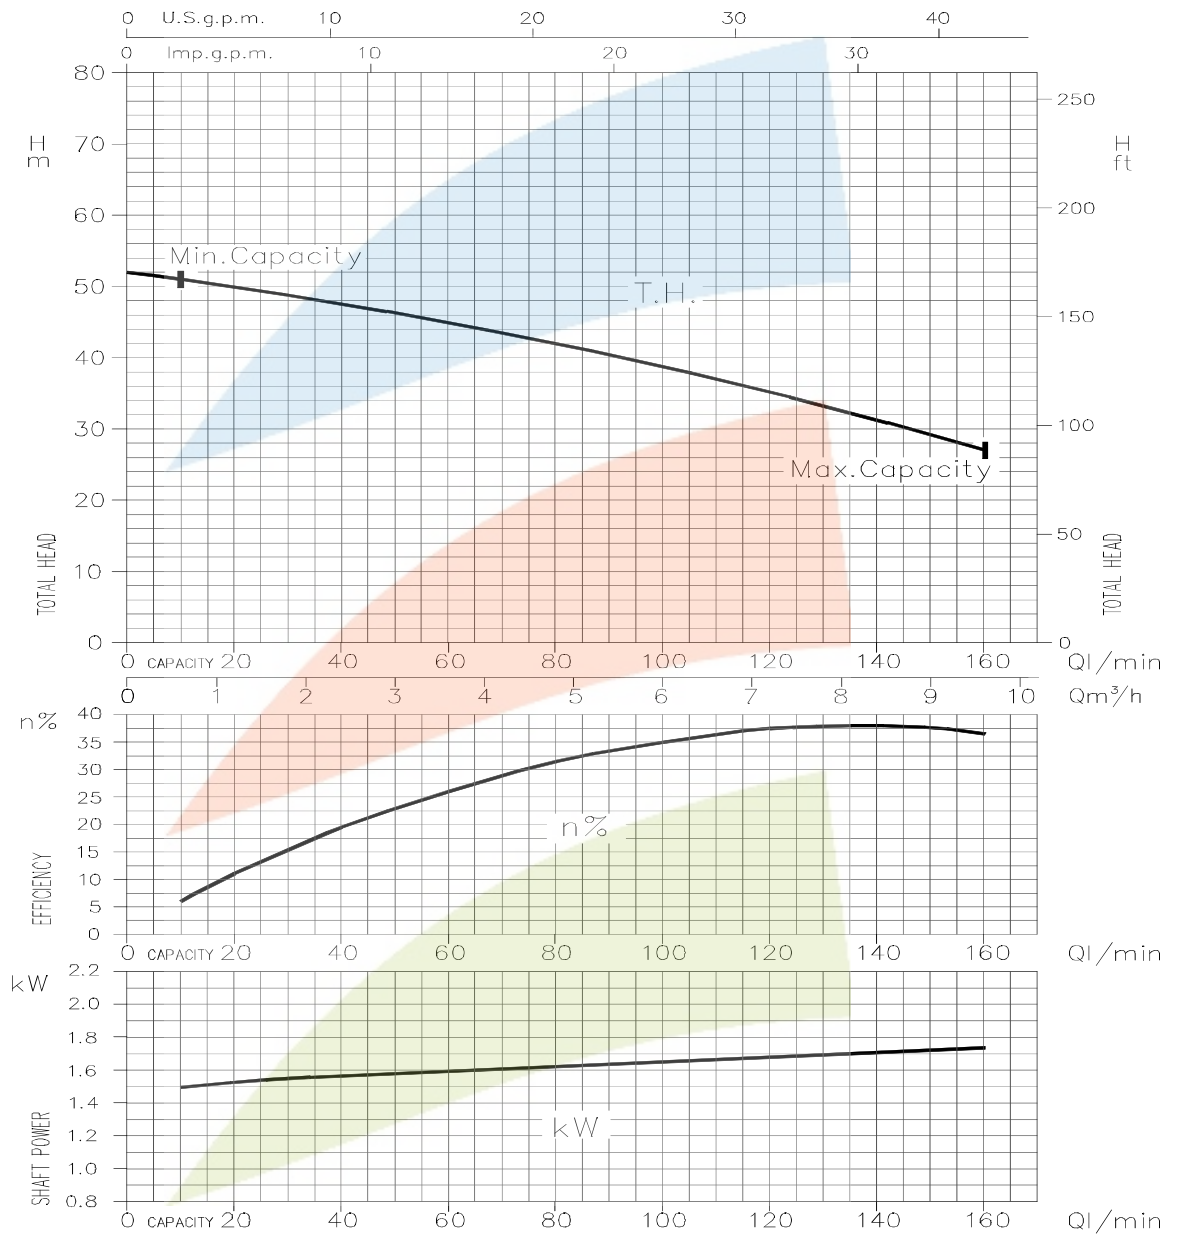

Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

AGC 3.00 (2.2 kW) - Impeller diameter = 164 mm

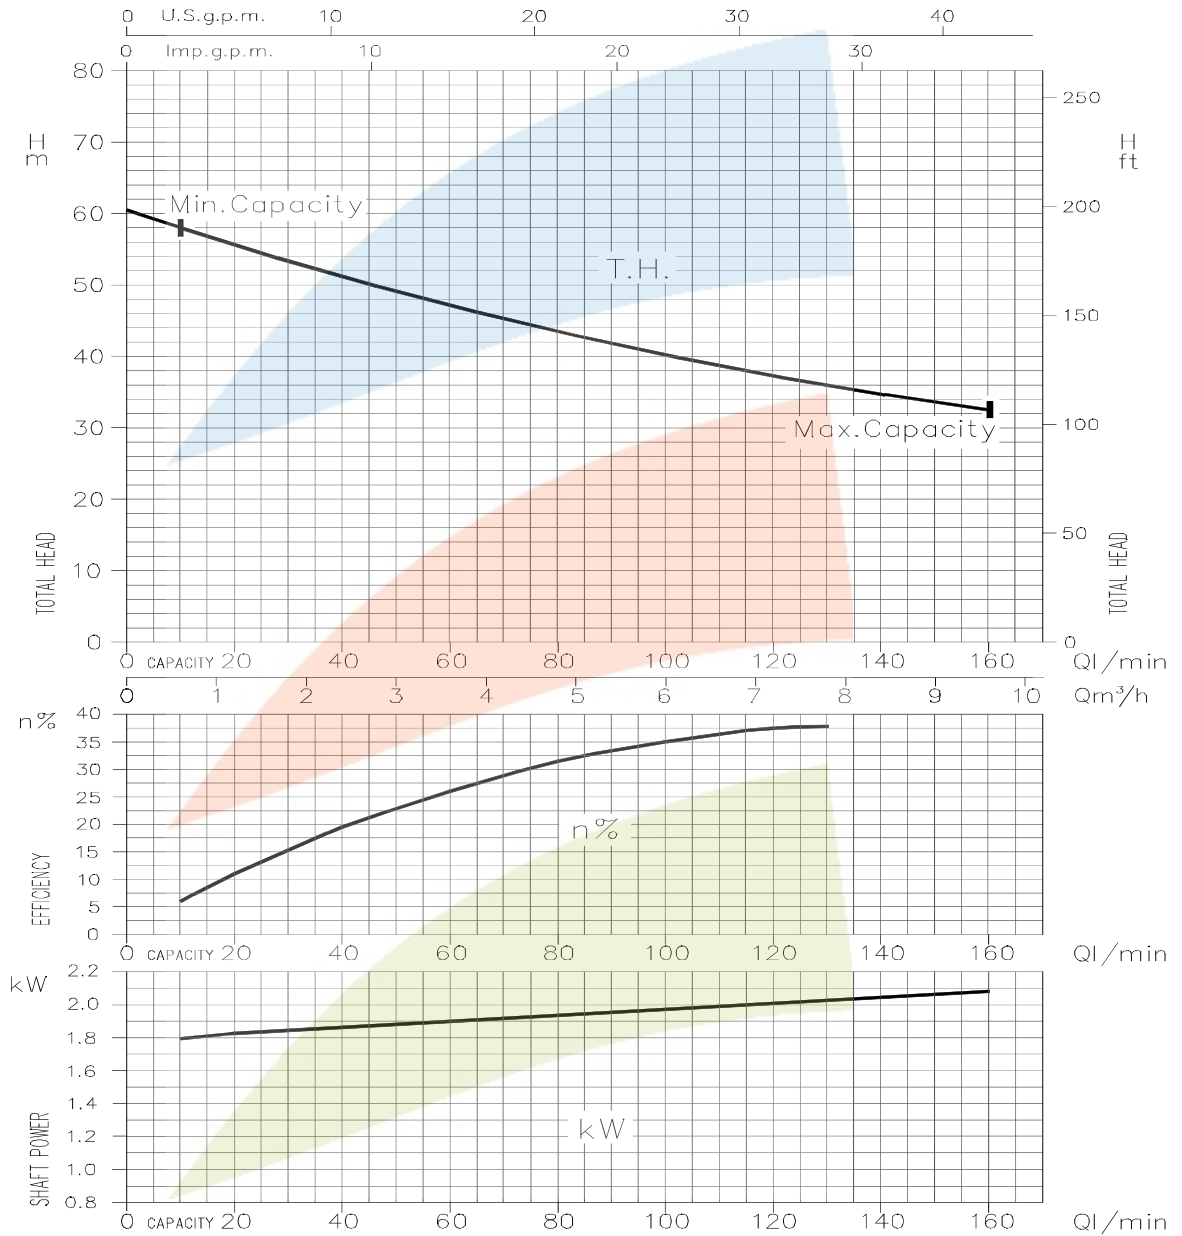

Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A