



CDA 0.75 (0.55 kW) - Impeller diameter = 122 mm

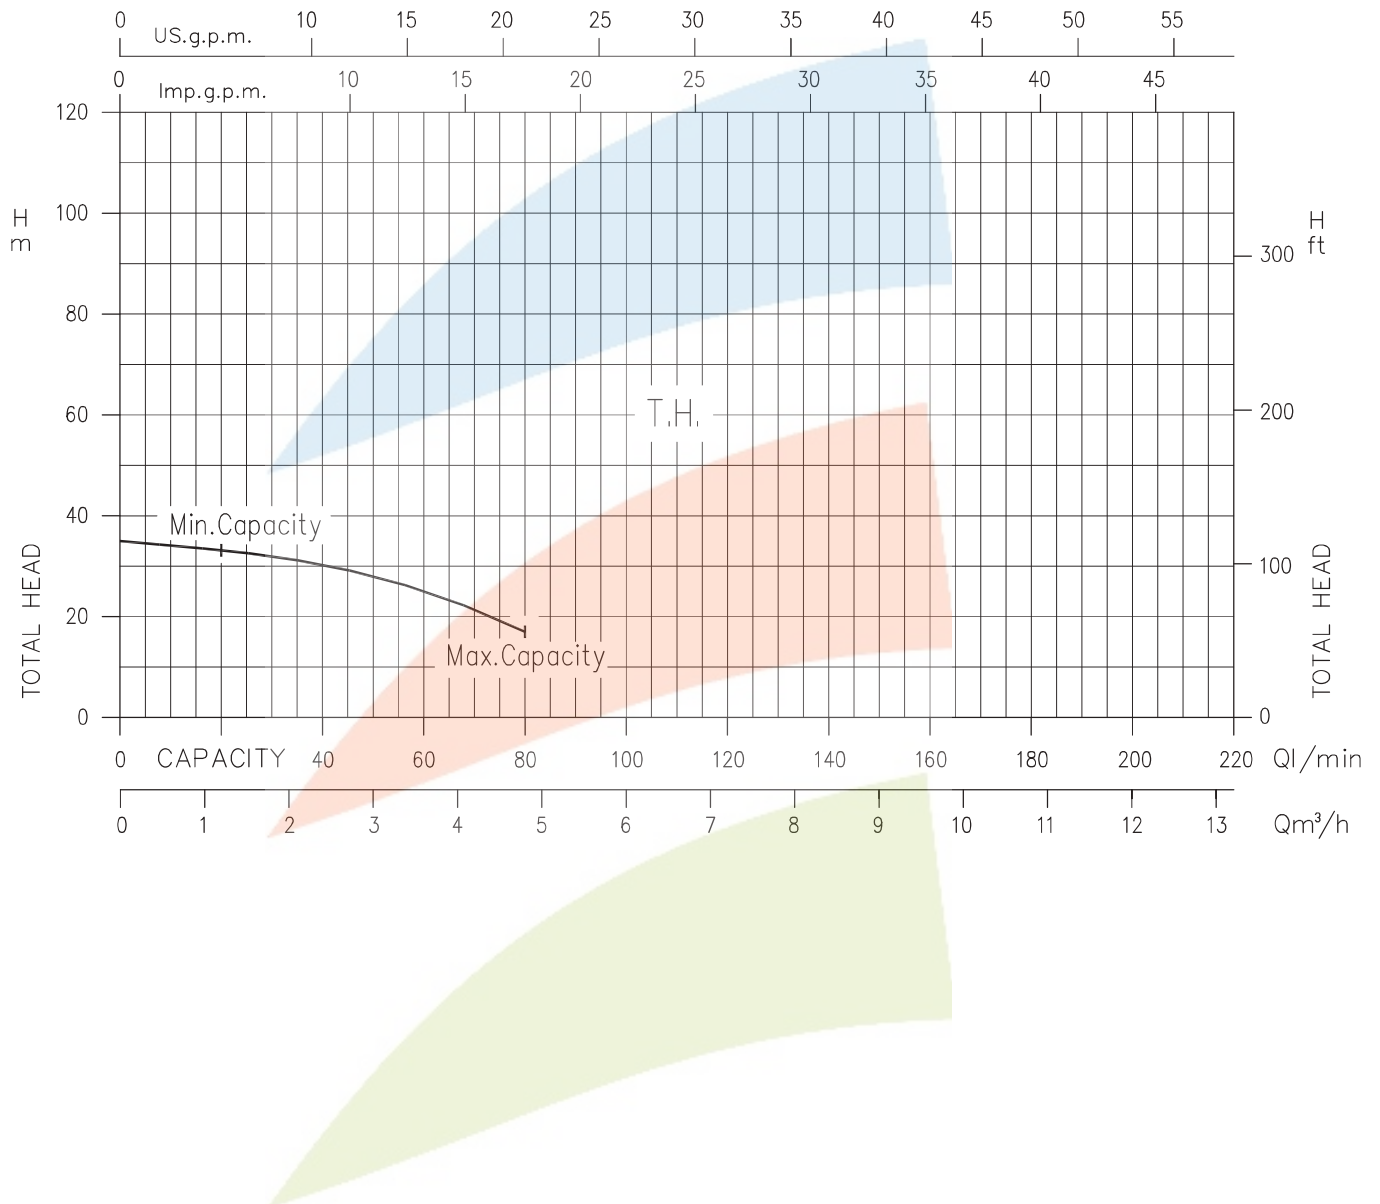


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDA 1.00 (0.75 kW) - Impeller diameter = 130 mm

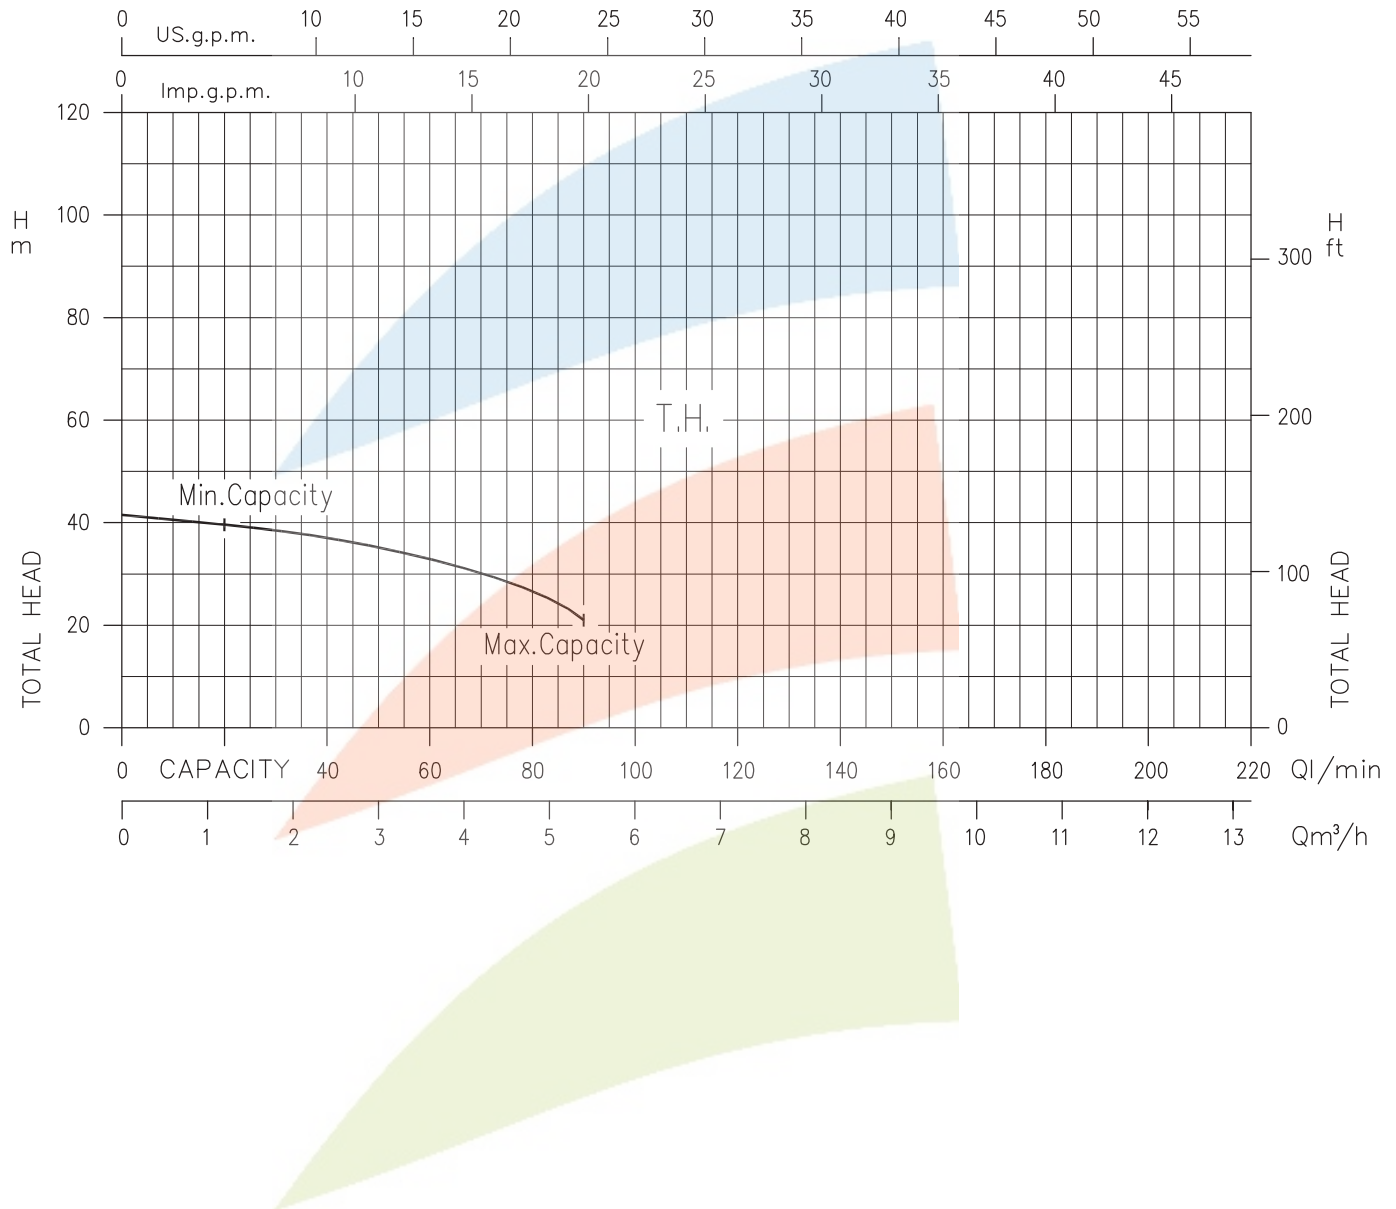


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDA 1.50 (1.1 kW) - Impeller diameter = 143 mm

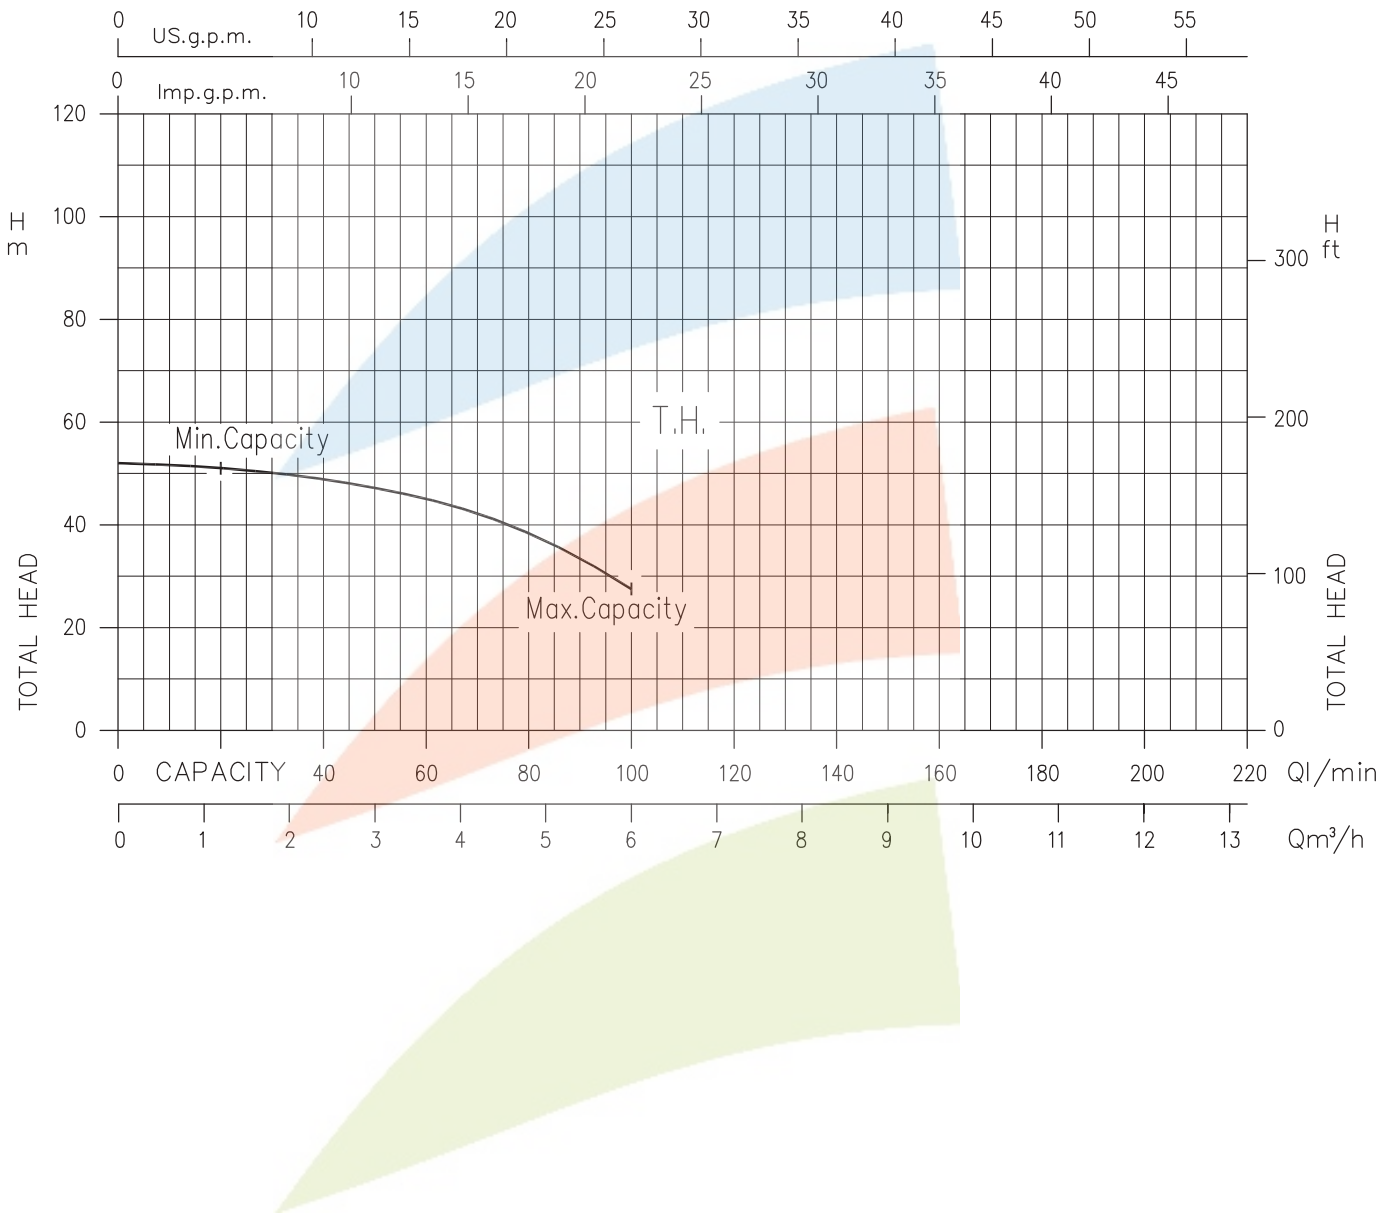


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDA 2.00 (1.5 kW) - Impeller diameter = 153 mm

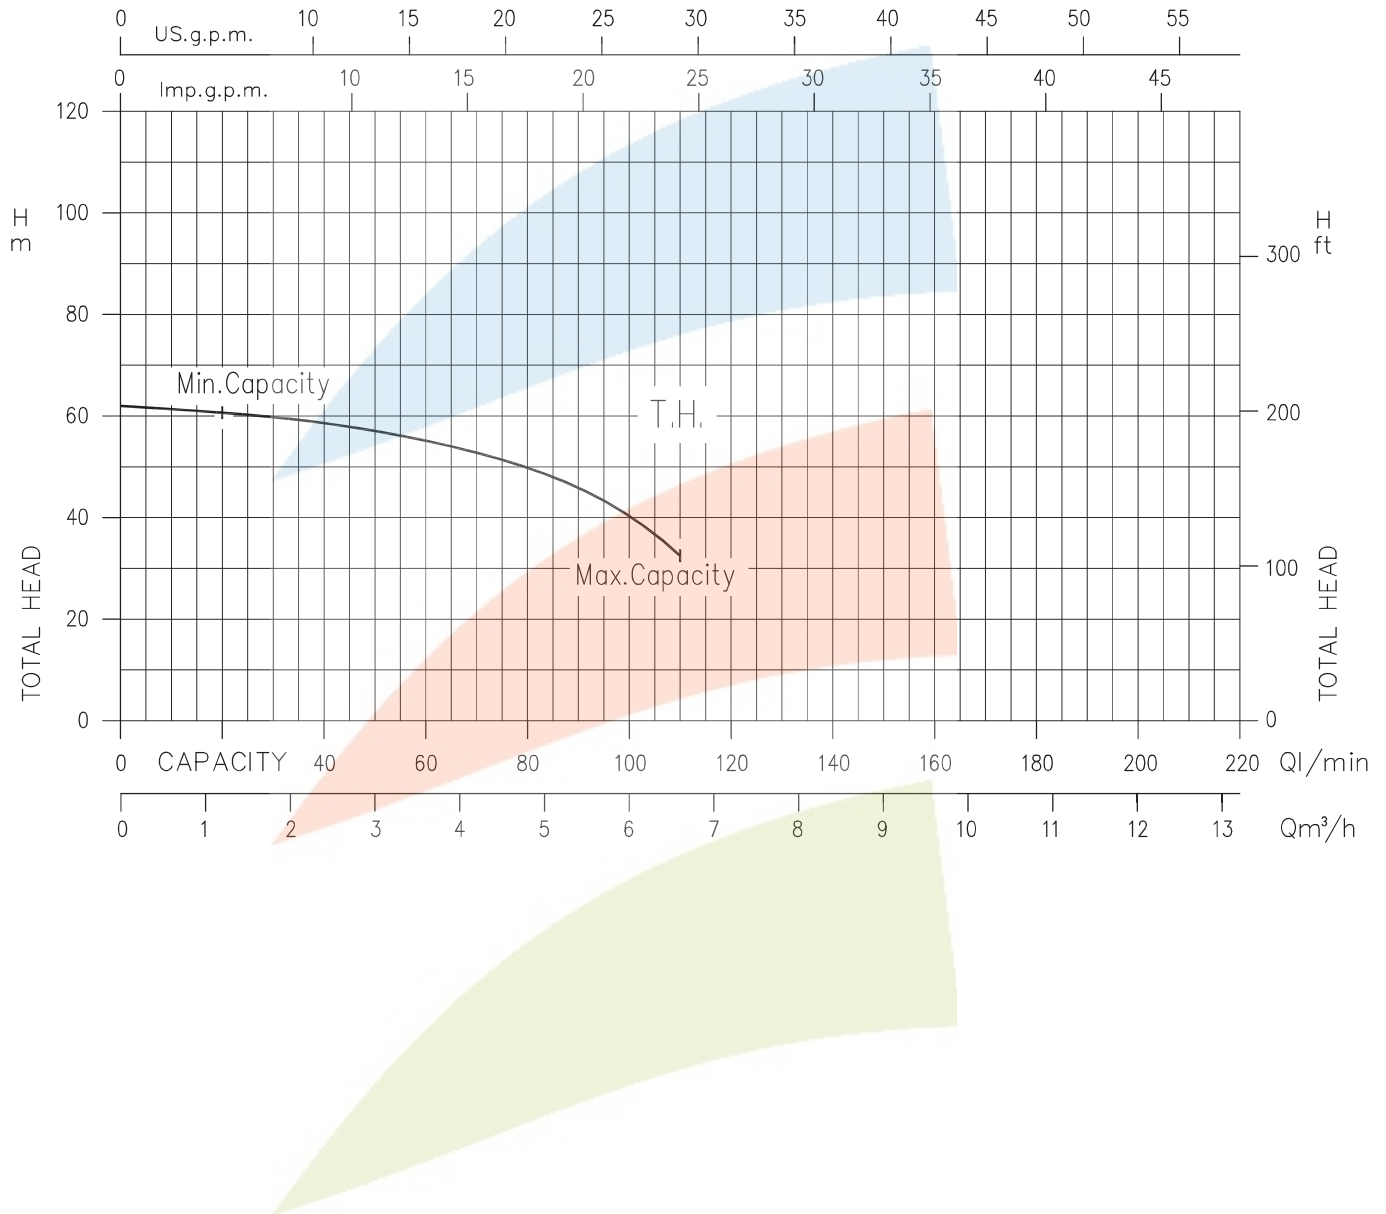


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDA 3.00 (2.2 kW) - Impeller diameter = 156 mm

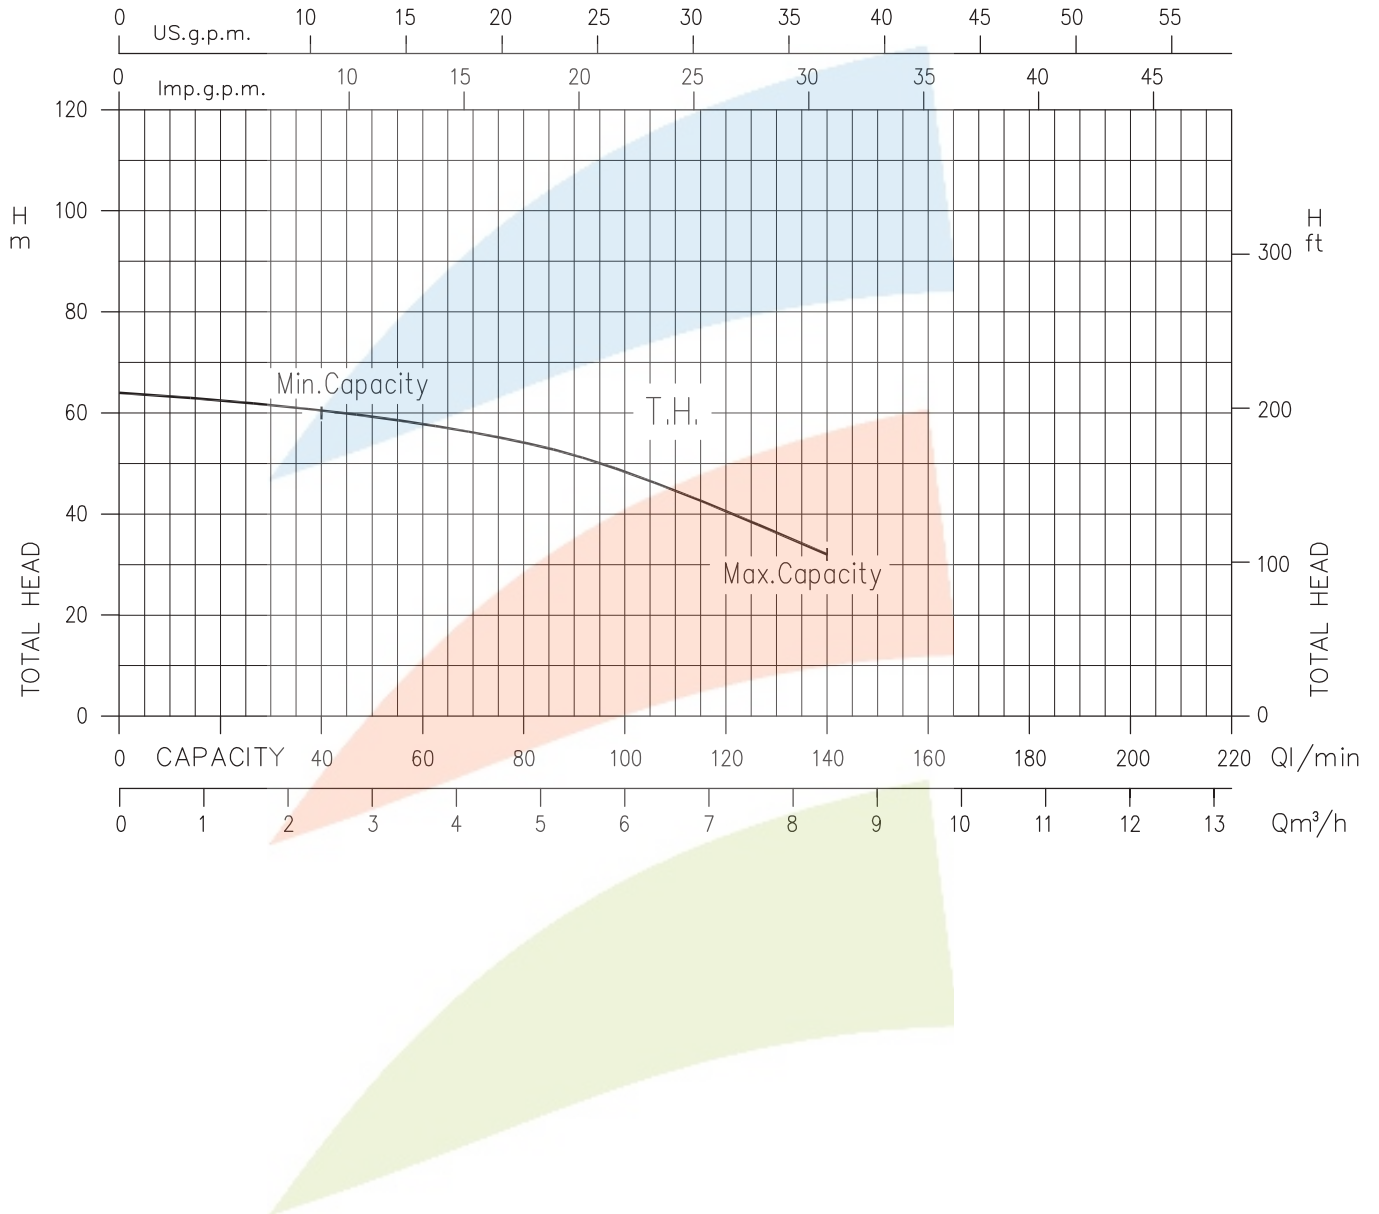


Rotation speed $\approx 2850 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDA 4.00 (3 kW) - Impeller diameter = 167 mm

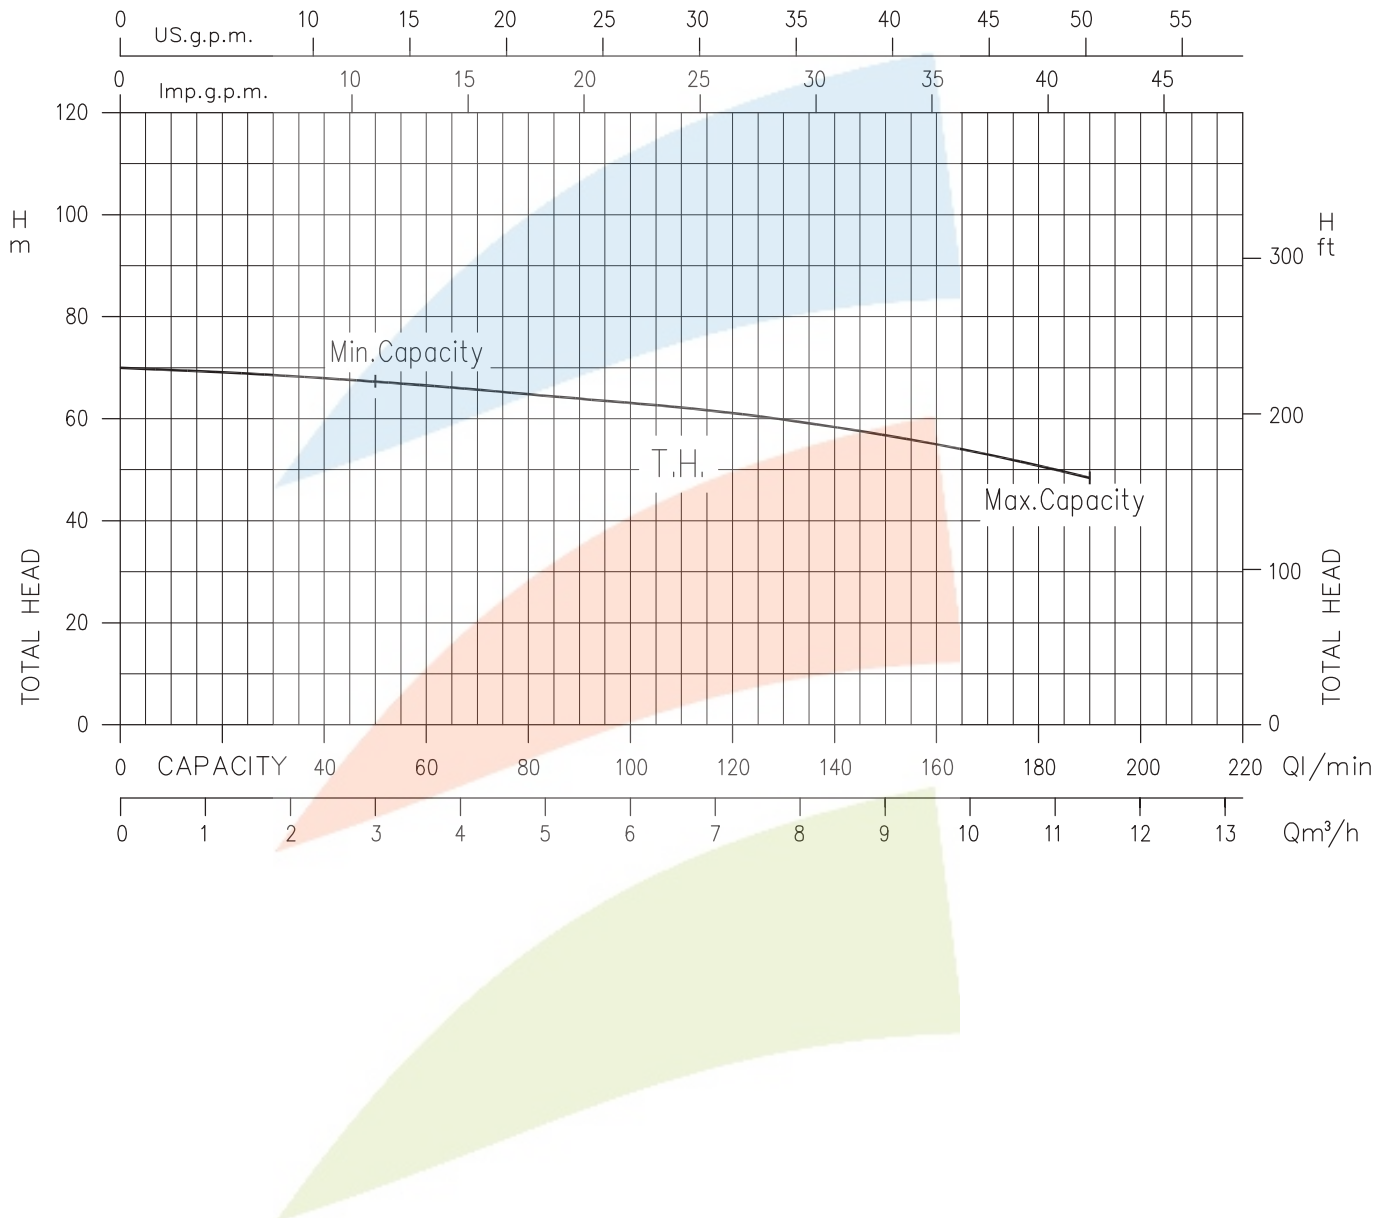

Rotation speed $\approx 2900 \text{ min}^{-1}$
Test standard: ISO 9906 – Annex A

CDA 5.50 (4 kW) - Impeller diameter = 179 mm

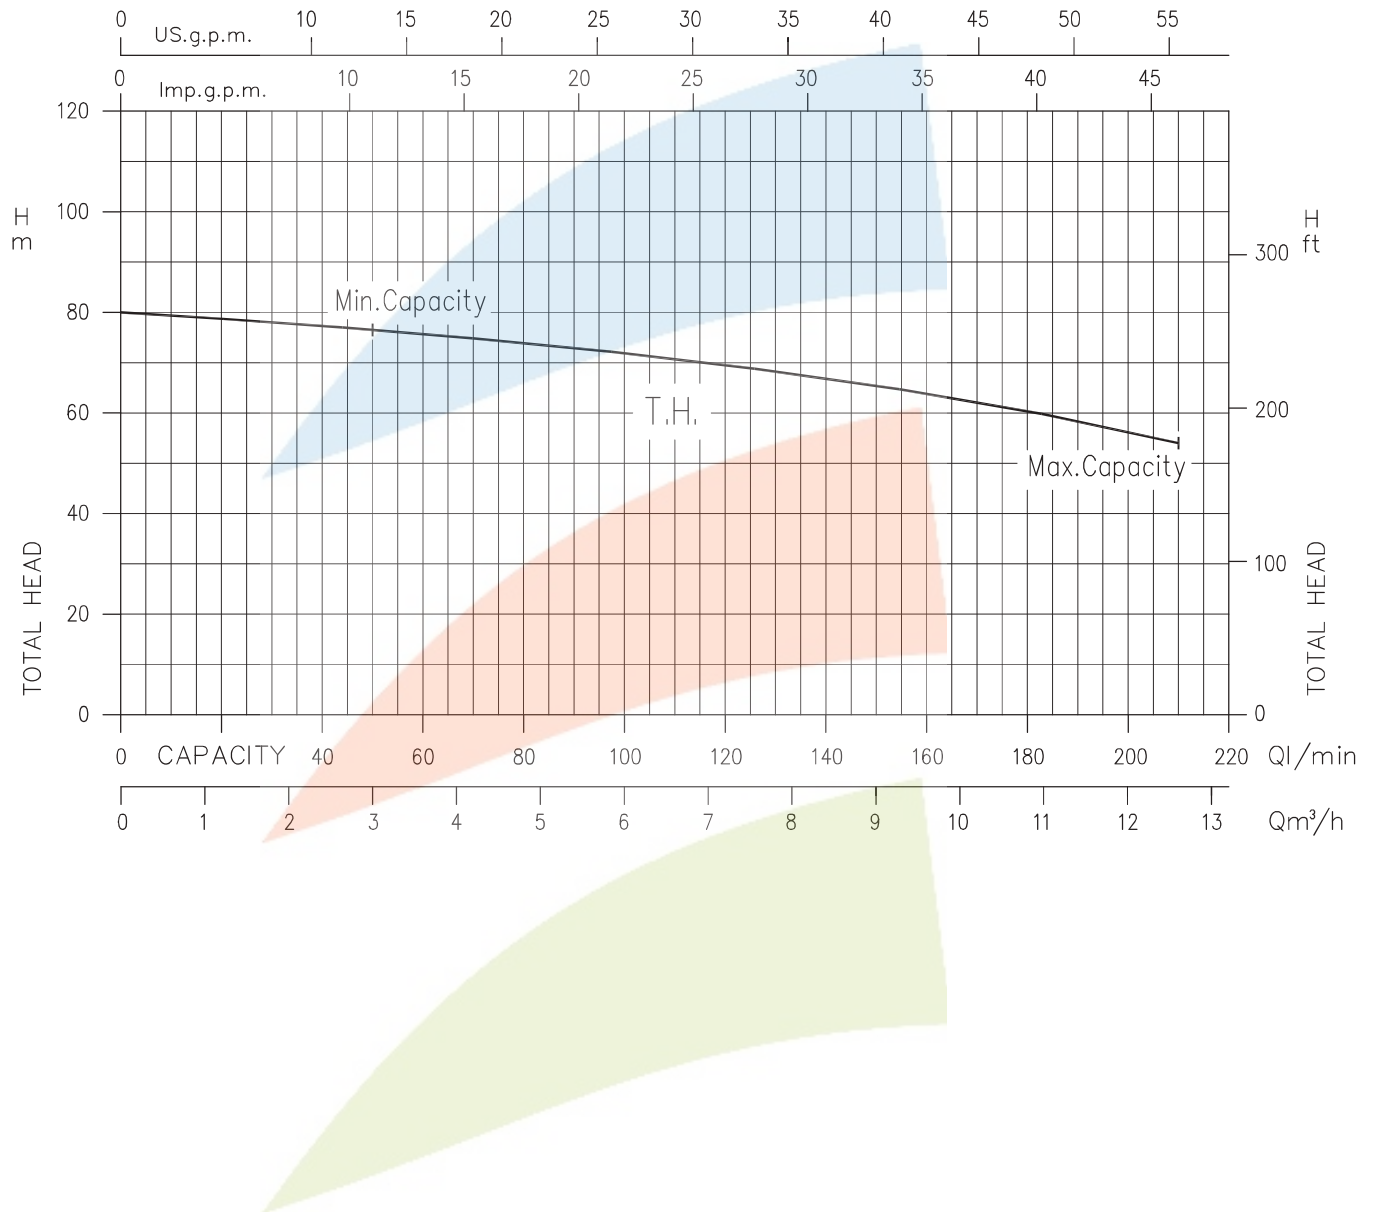

Rotation speed $\approx 2900 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A