



CDX 70/05 (0.37 kW) - Impeller diameter = 132 mm
 CDX 70/07 (0.55 kW) - Impeller diameter = 157 mm

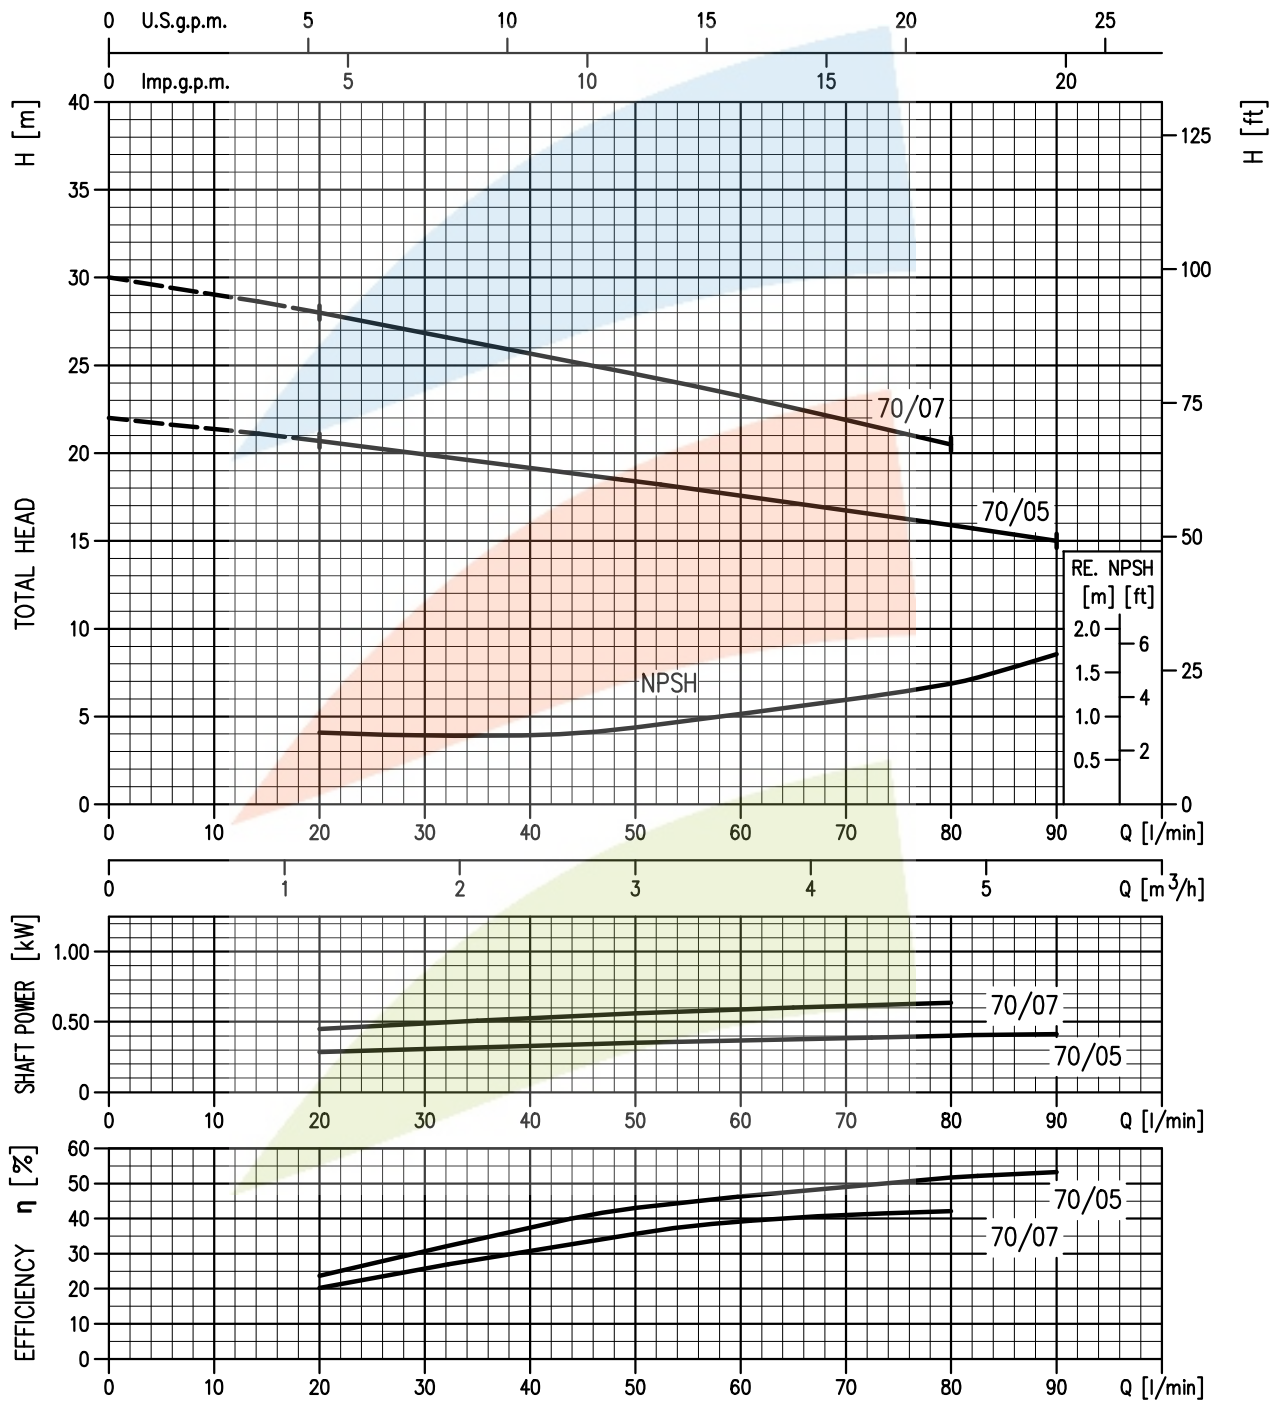


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDX 90/10 (0.75 kW) MEI > 0.50 - Impeller diameter = 157 mm

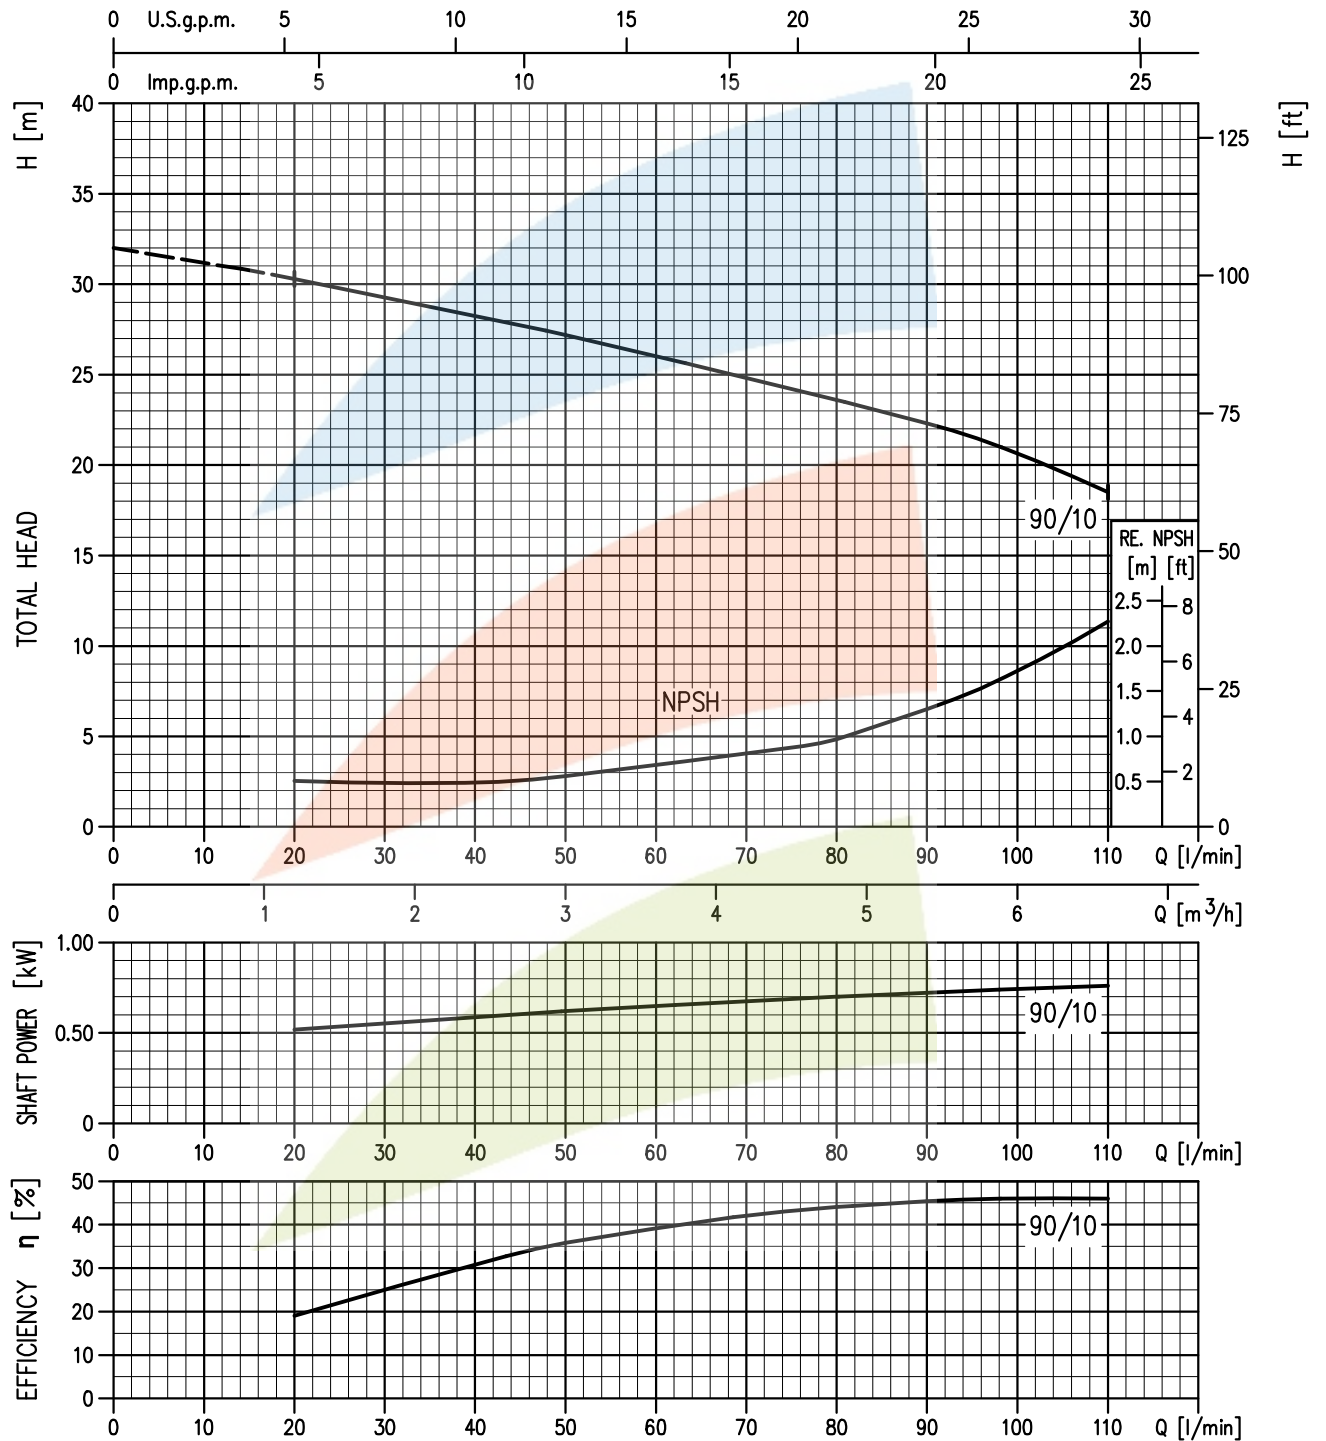


Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

CDX 120/07 (0.55 kW) MEI > 0.50 - Impeller diameter = 132 mm
 CDX 120/12 (0.90 kW) MEI > 0.40 - Impeller diameter = 157 mm
 CDX 120/20 (1.50 kW) MEI > 0.40 - Impeller diameter = 176 mm

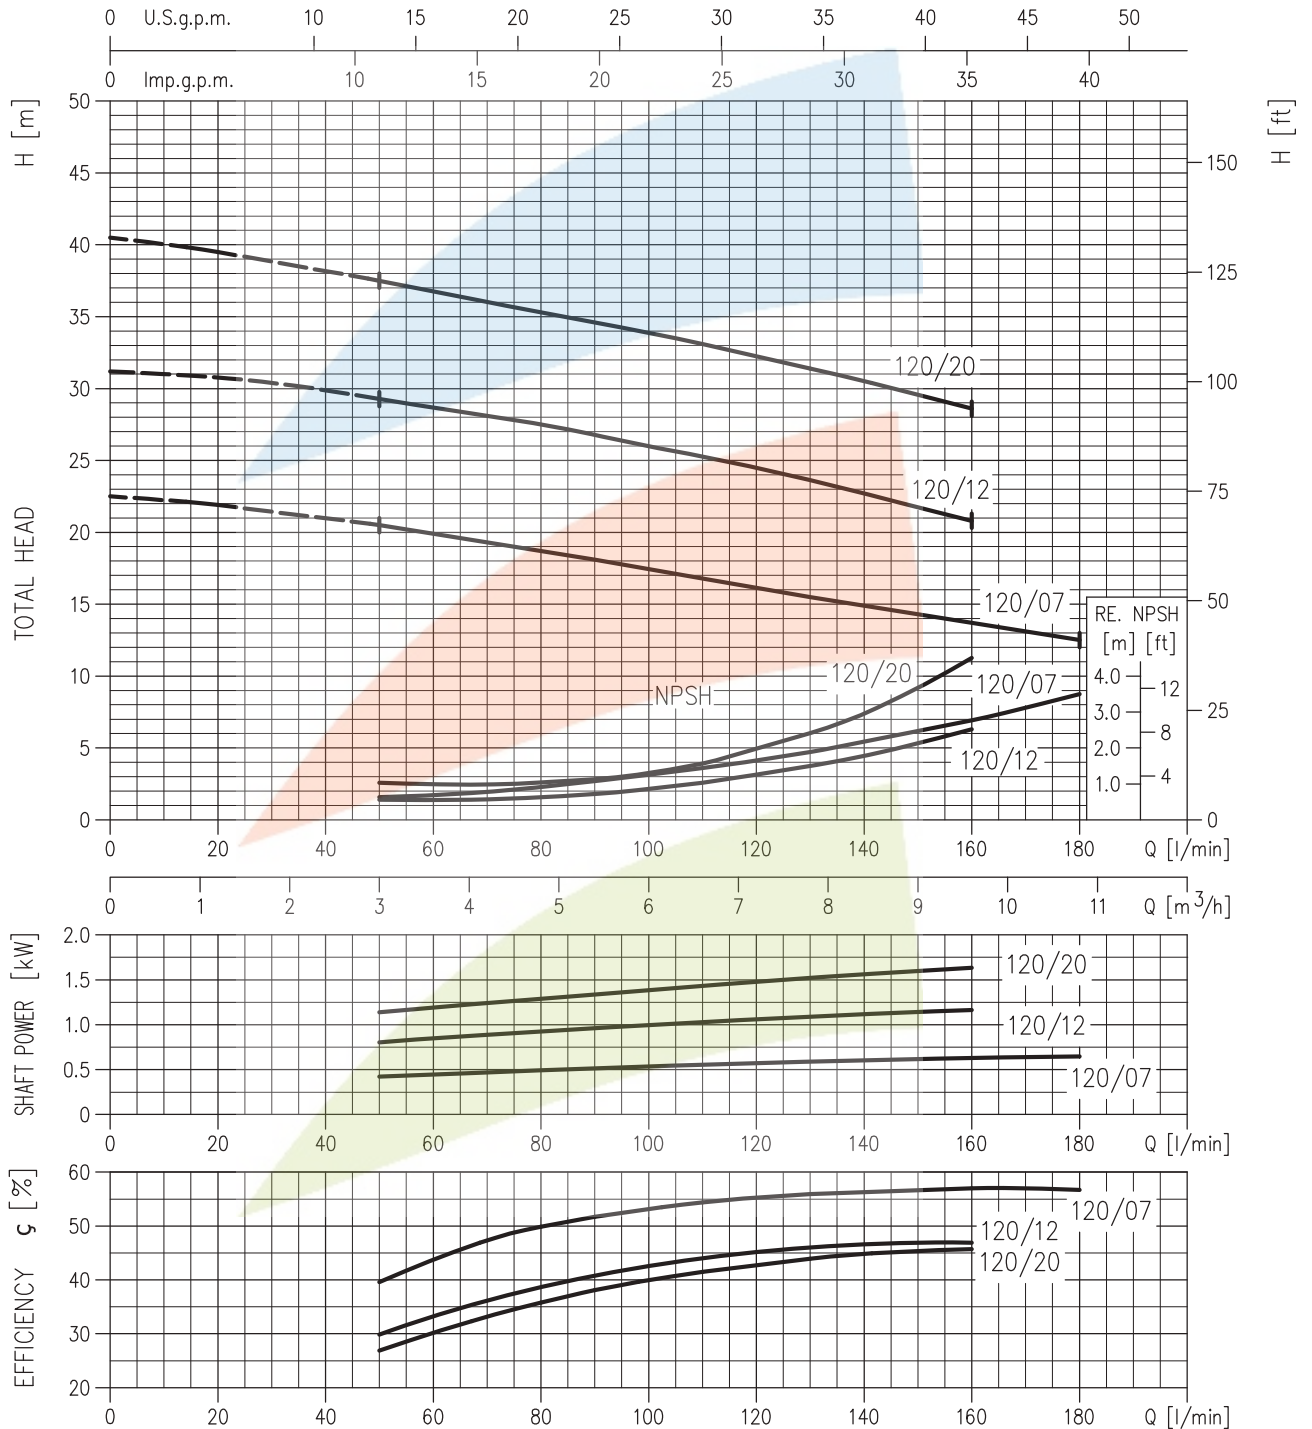

Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

CDX 200/12 (0.90 kW) MEI > 0.50 - Impeller diameter = 132 mm
CDX 200/20 (1.50 kW) MEI > 0.60 - Impeller diameter = 157 mm
CDX 200/25 (1.80 kW) MEI > 0.40 - Impeller diameter = 176 mm

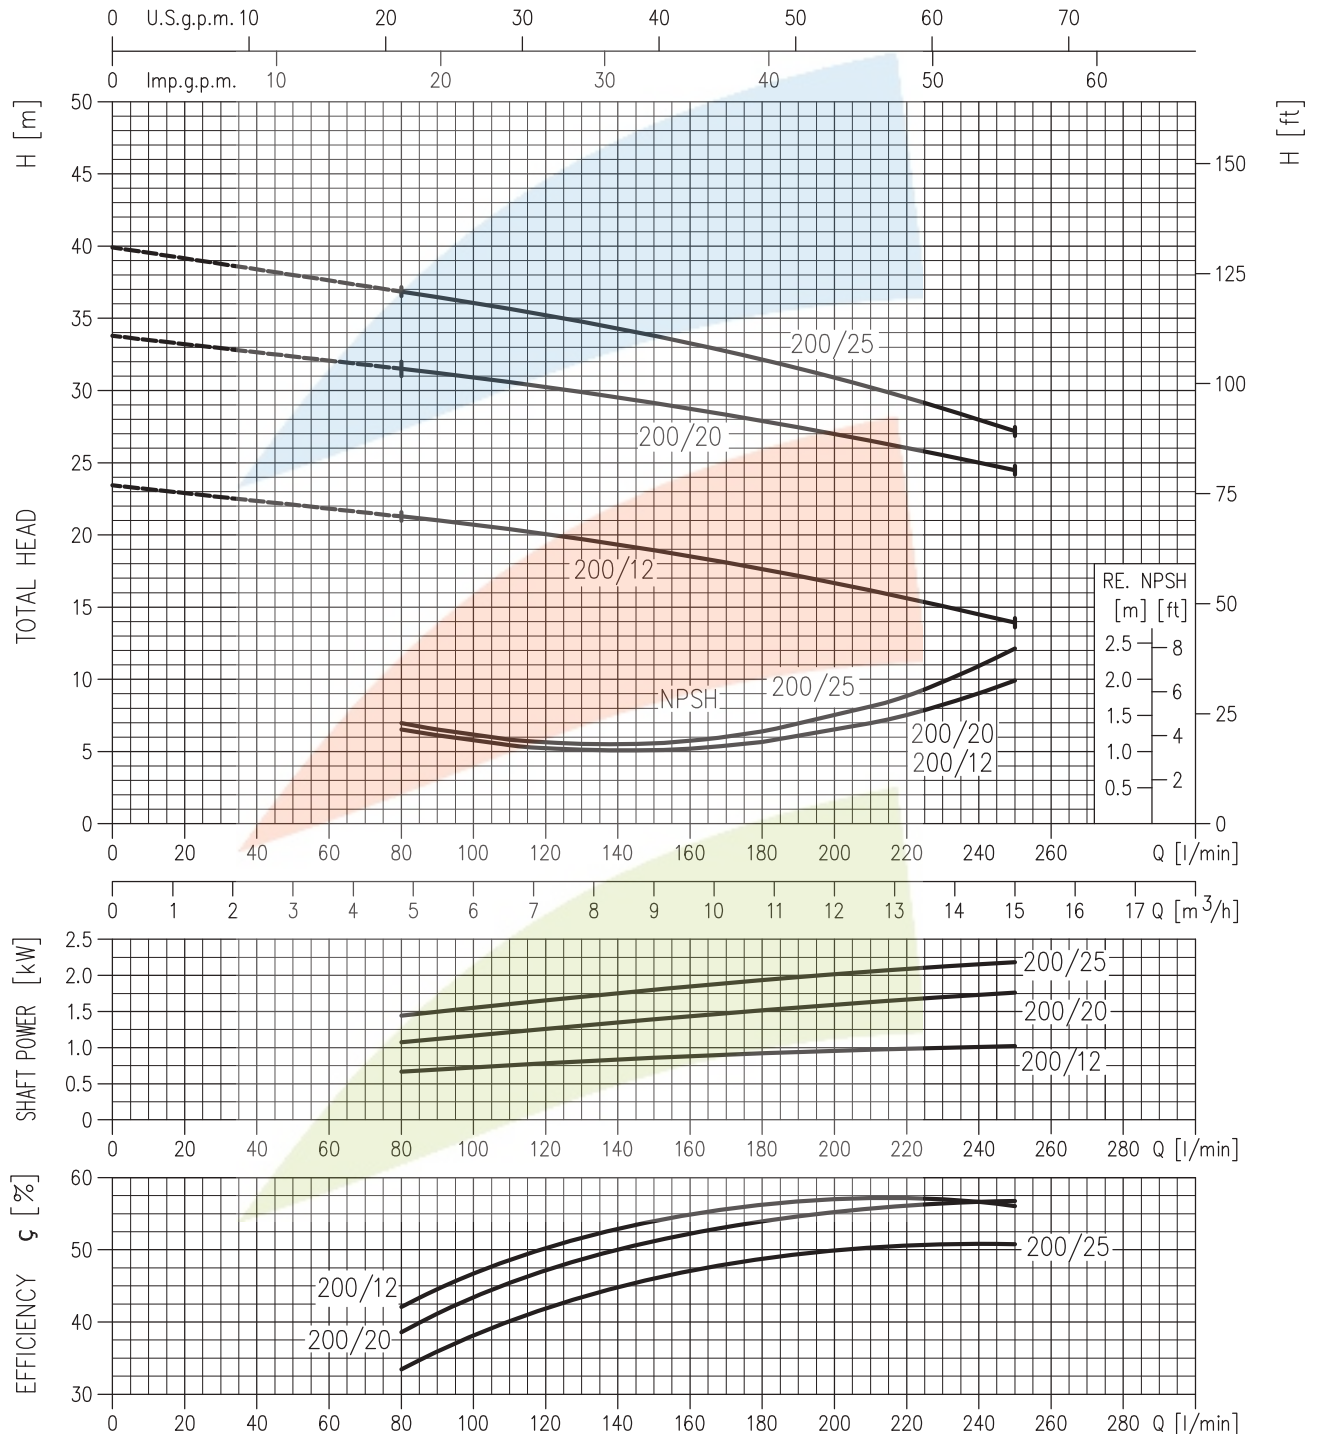

Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A