


PERFORMANCE CURVE

50Hz

Rev. M

**CMA 0.50 (0.37 kW) - Impeller diameter = 130 mm**  
**CMA 0.75 (0.55 kW) - Impeller diameter = 161 mm**  
**CMA 1.00 (0.75 kW) - Impeller diameter = 160 mm**  
**CMA 1.50 (1.1 kW) MEI > 0.70 - Impeller diameter = 173 mm**  
**CMA 2.00 (1.5 kW) MEI > 0.70 - Impeller diameter = 191 mm**  
**CMA 3.00 (2.2 kW) MEI > 0.70 - Impeller diameter = 201 mm**

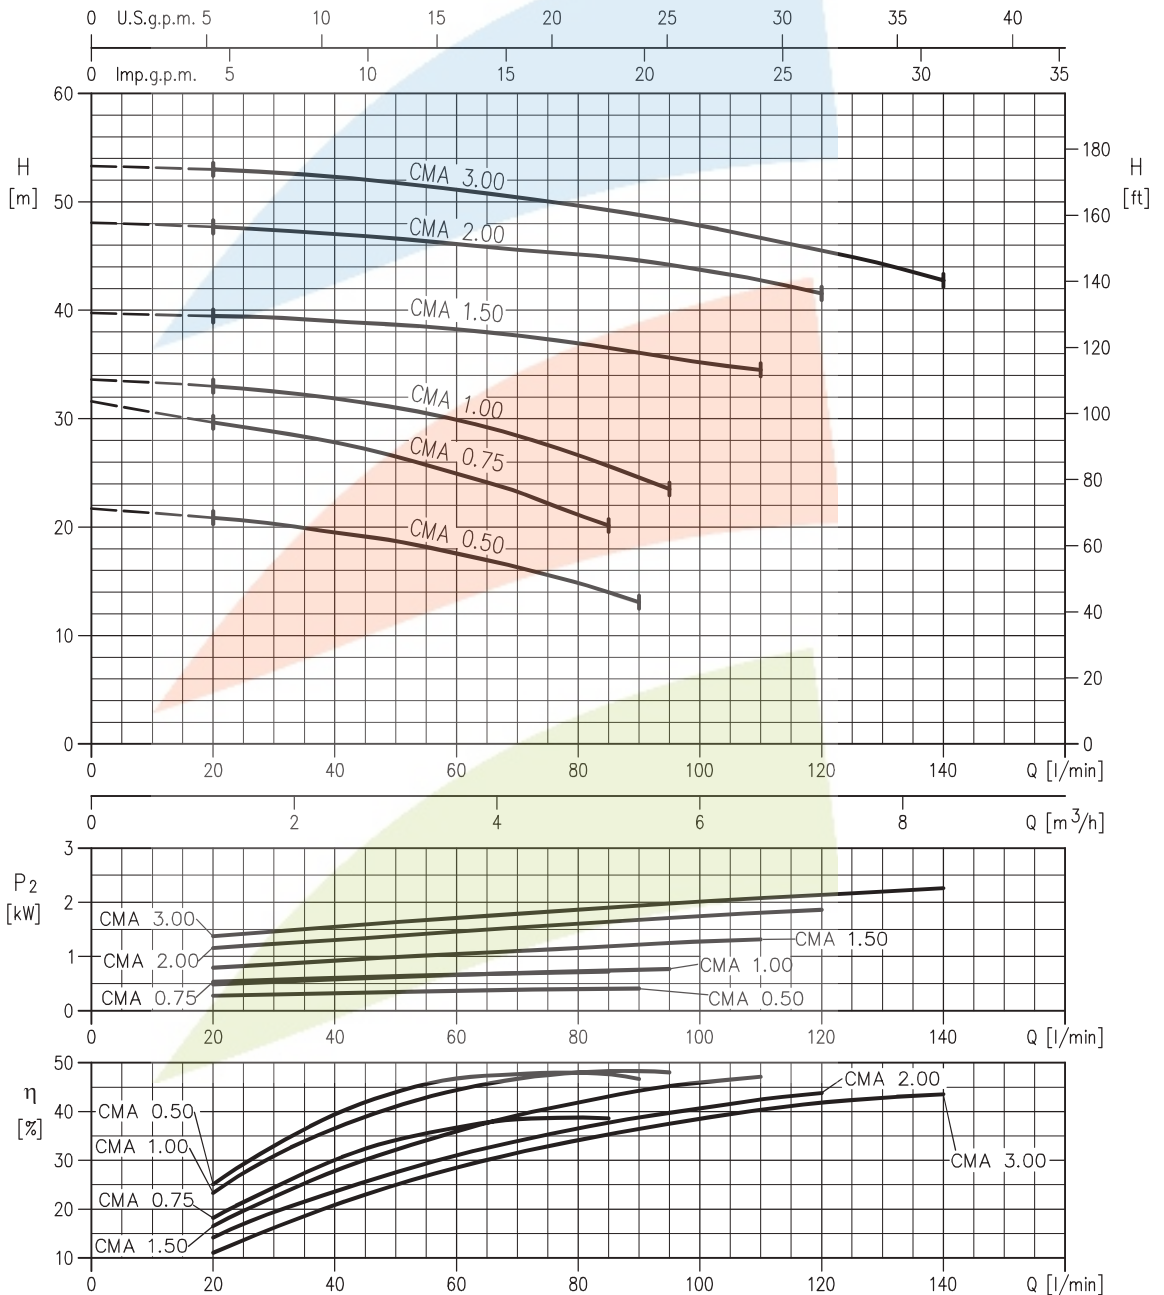


Rotation speed  $\approx 2800 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A

PERFORMANCE CURVE

50Hz


Rev. M

- CMB 0.75 (0.55 kW) MEI > 0.60 - Impeller diameter = 112 mm**
- CMB 1.00 (0.75 kW) MEI > 0.60 - Impeller diameter = 123 mm**
- CMB 1.50 (1.1 kW) MEI > 0.60 - Impeller diameter = 132 mm**
- CMB 2.00 (1.5 kW) MEI > 0.70 - Impeller diameter = 155 mm**
- CMB 3.00 (2.2 kW) MEI > 0.70 - Impeller diameter = 164.5 mm**
- CMB 4.00 (3 kW) MEI > 0.70 - Impeller diameter = 189 mm**
- CMB 5.50 (4 kW) MEI > 0.70 - Impeller diameter = 204 mm**

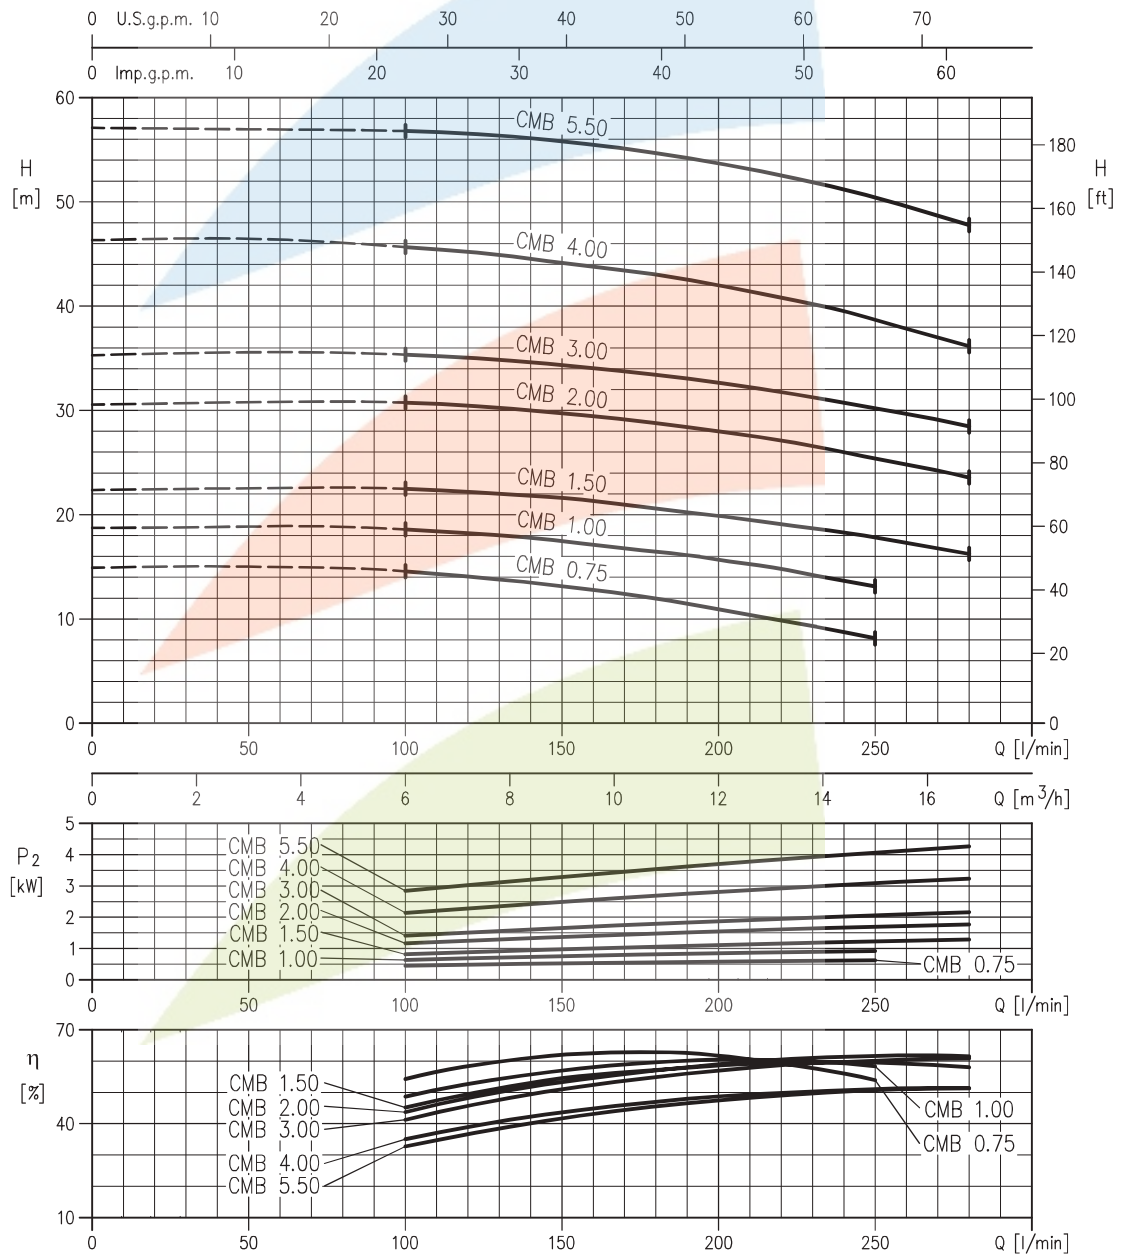


Rotation speed  $\approx 2800 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A

**CMC 0.75 (0.55 kW) MEI > 0.70 - Impeller diameter = 100 mm**  
**CMC 1.00 (0.75 kW) MEI > 0.70 - Impeller diameter = 112 mm**

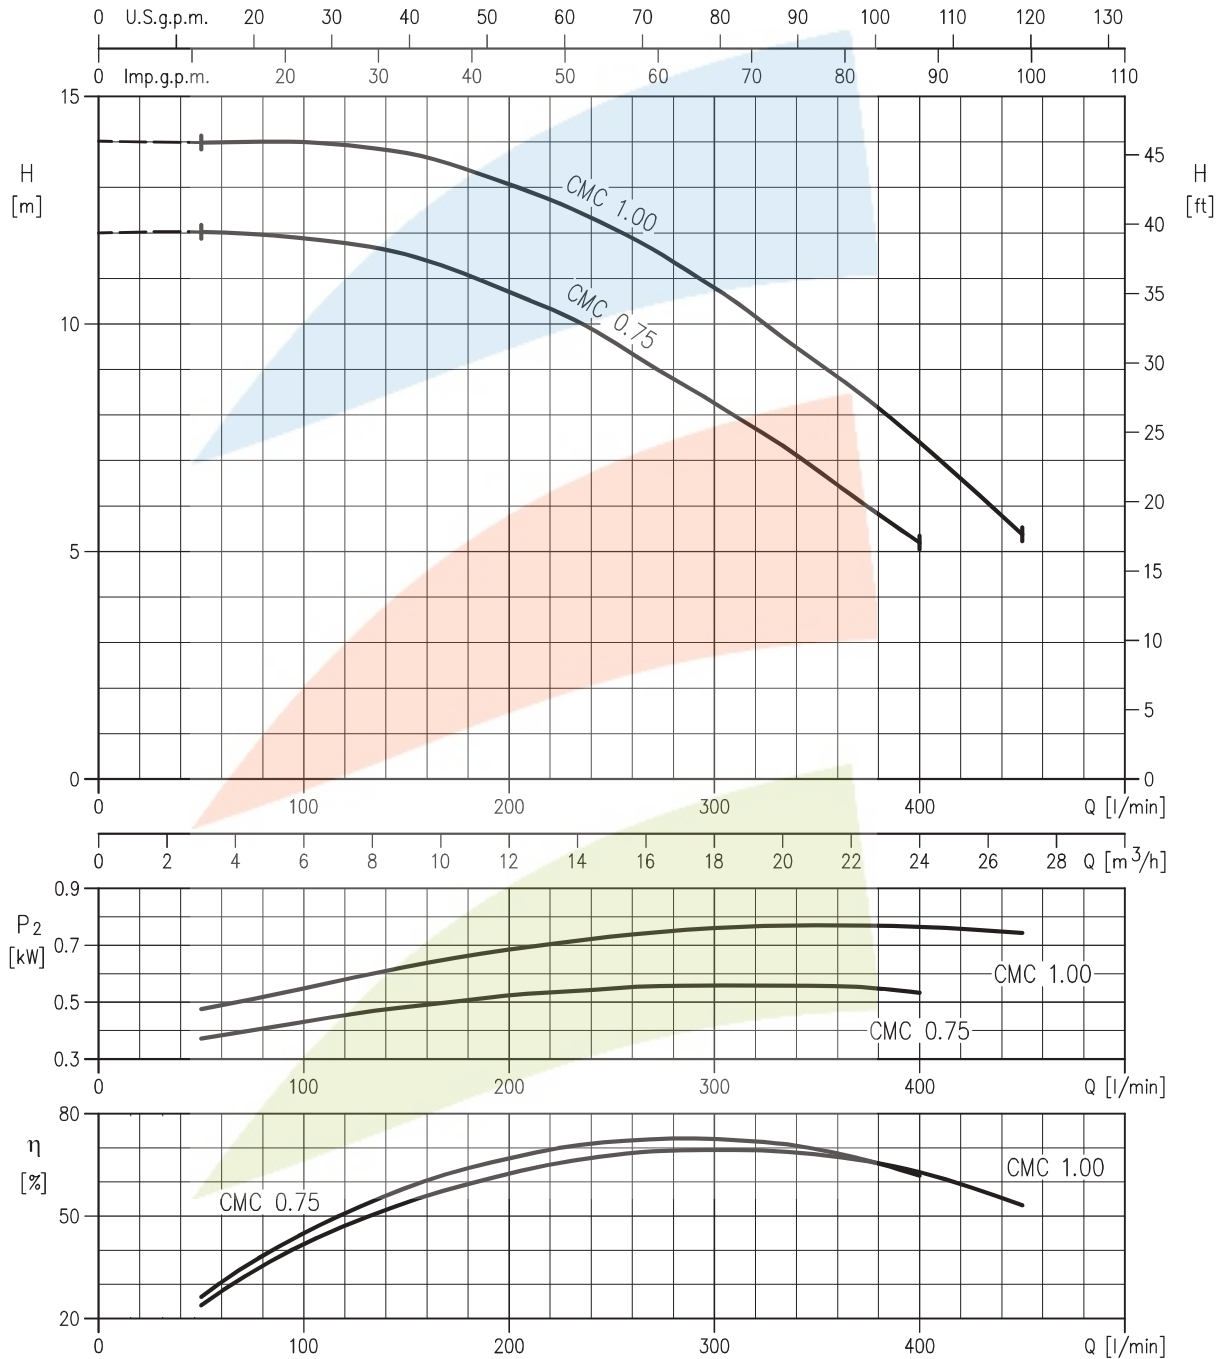

Rotation speed  $\approx 2800 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A

**CMD 1.50 (1.1 kW) MEI > 0.60 - Impeller diameter = 105 mm**  
**CMD 2.00 (1.5 kW) MEI > 0.60 - Impeller diameter = 110 mm**  
**CMD 3.00 (2.2 kW) MEI > 0.60 - Impeller diameter = 120 mm**  
**CMD 4.00 (3 kW) MEI > 0.60 - Impeller diameter = 123 mm**

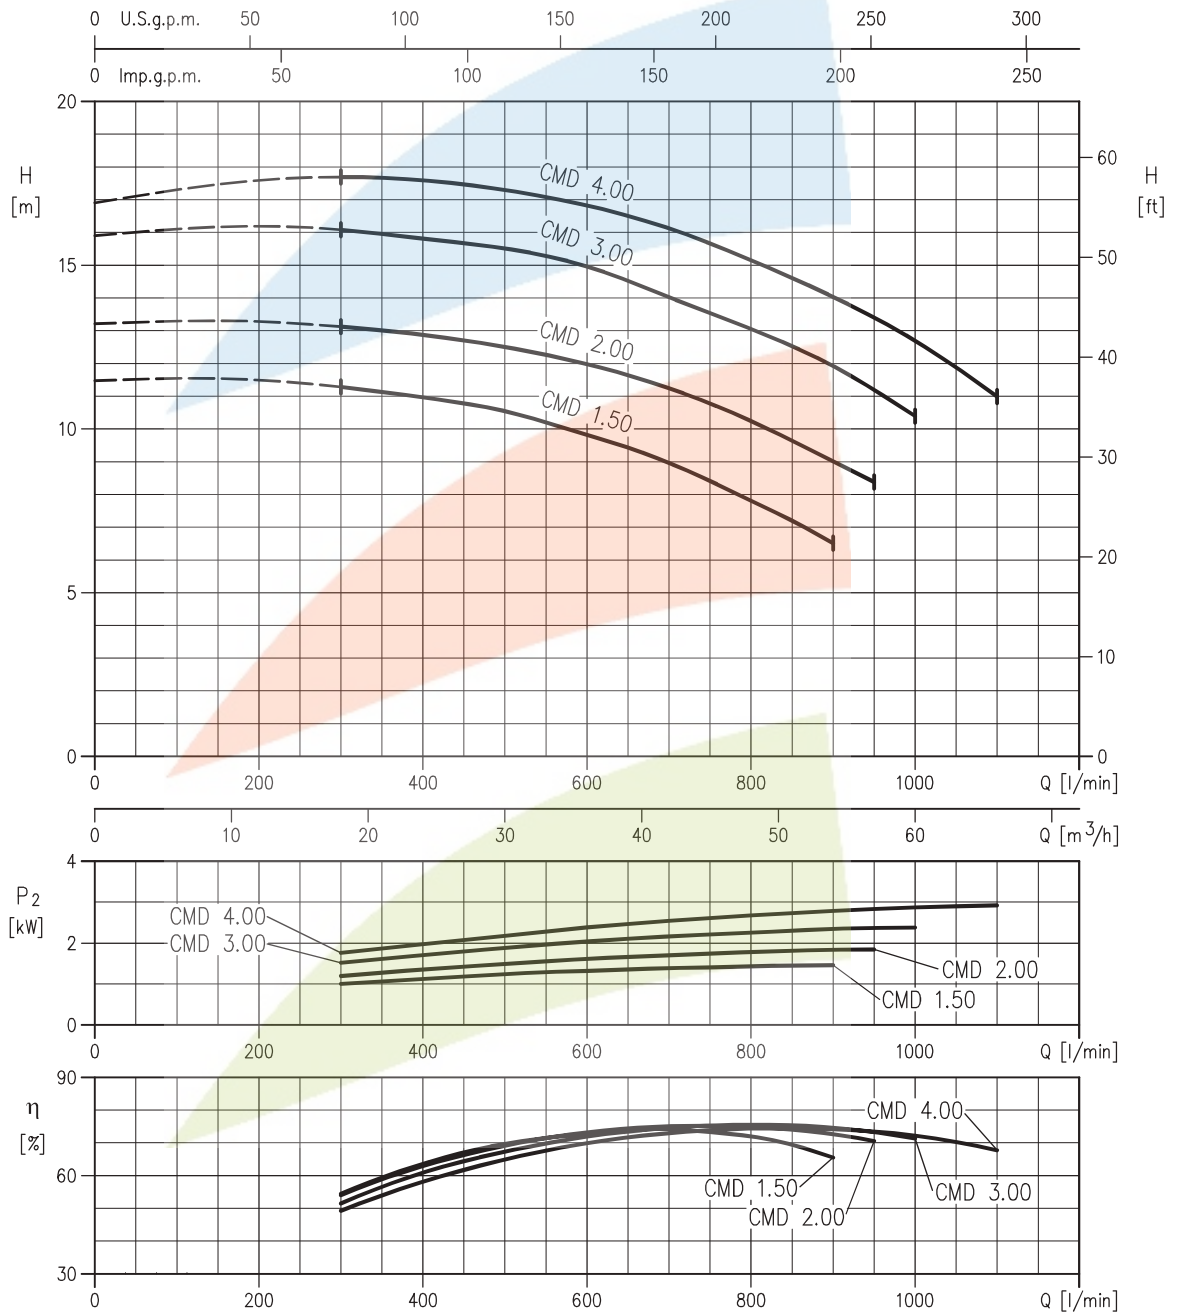

Rotation speed  $\approx 2850 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A