



LPS 25/08 (0.08 kW) - LPS 25/08M (0.08 kW) - Impeller diameter = 84 mm

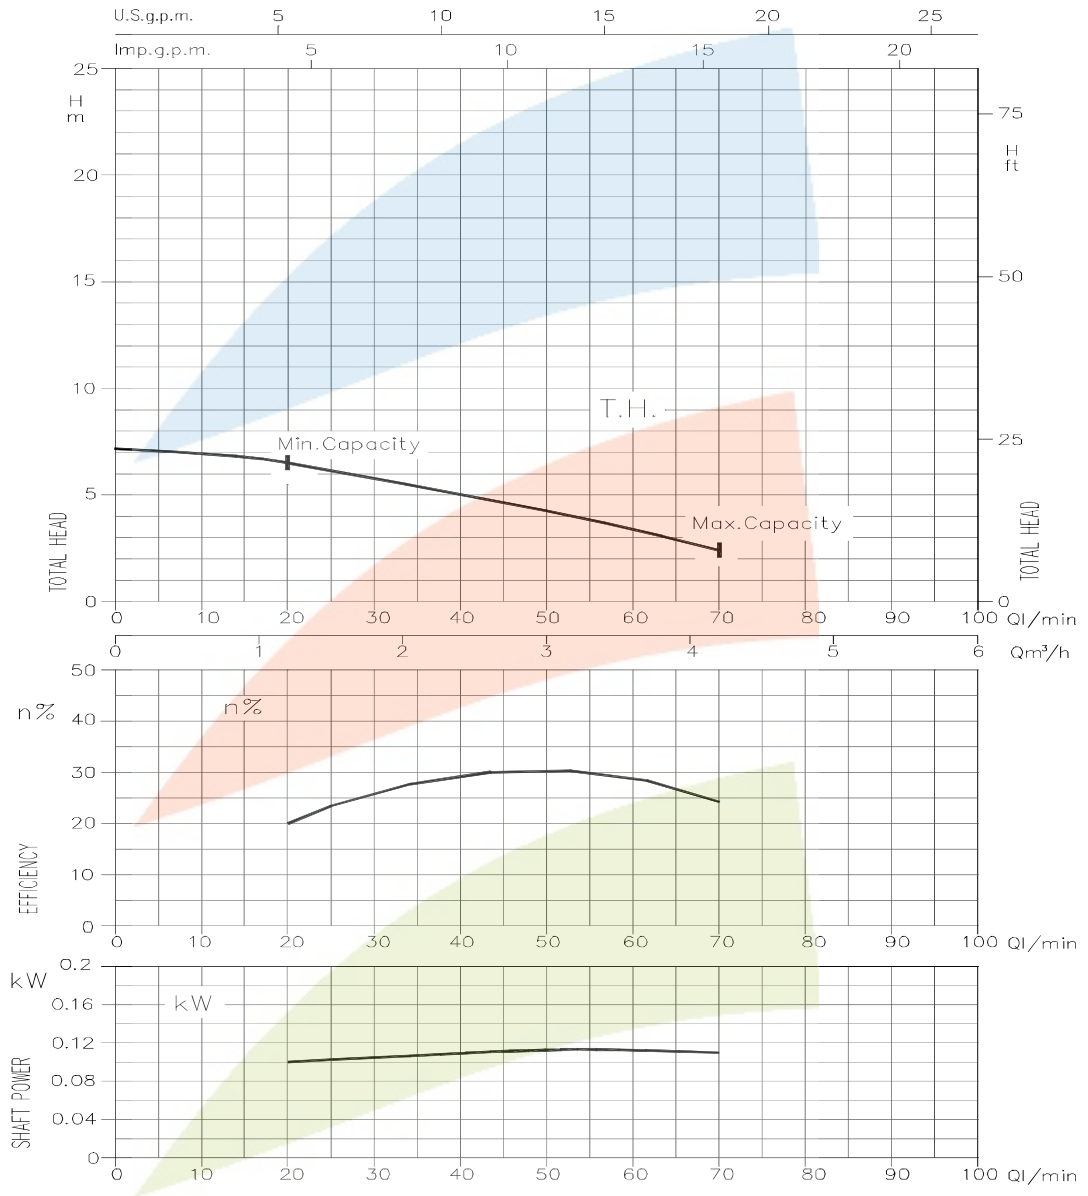


Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

LPS 25/15 (0.15 kW) - LPS 25/15M (0.15 kW) - Impeller diameter = 98 mm

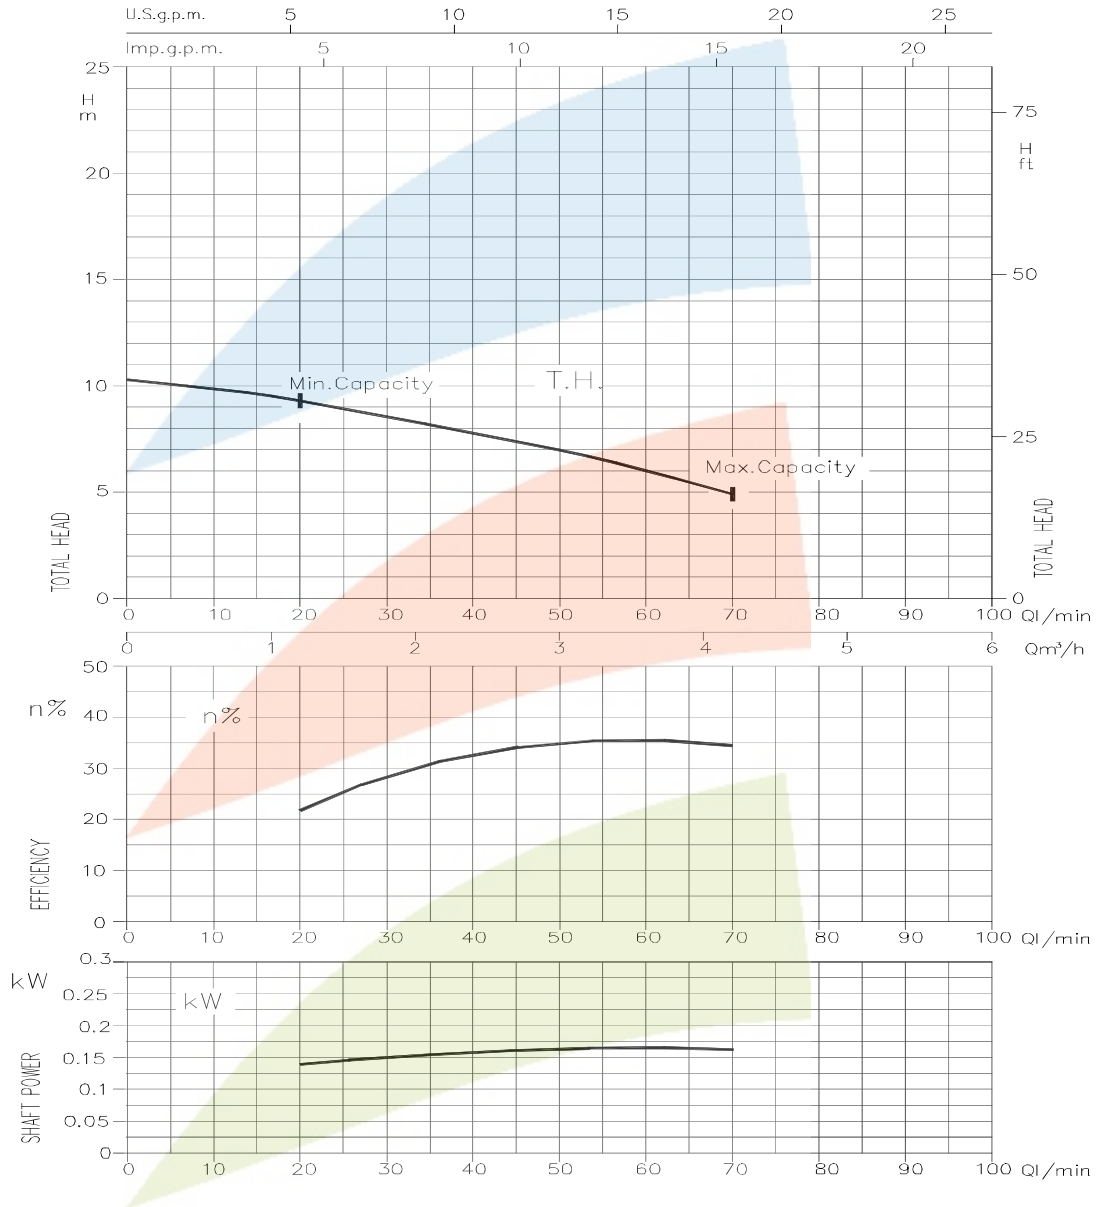


Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPS 25/25 (0.25 kW) - LPS 25/25M (0.25 kW) - Impeller diameter = 114 mm

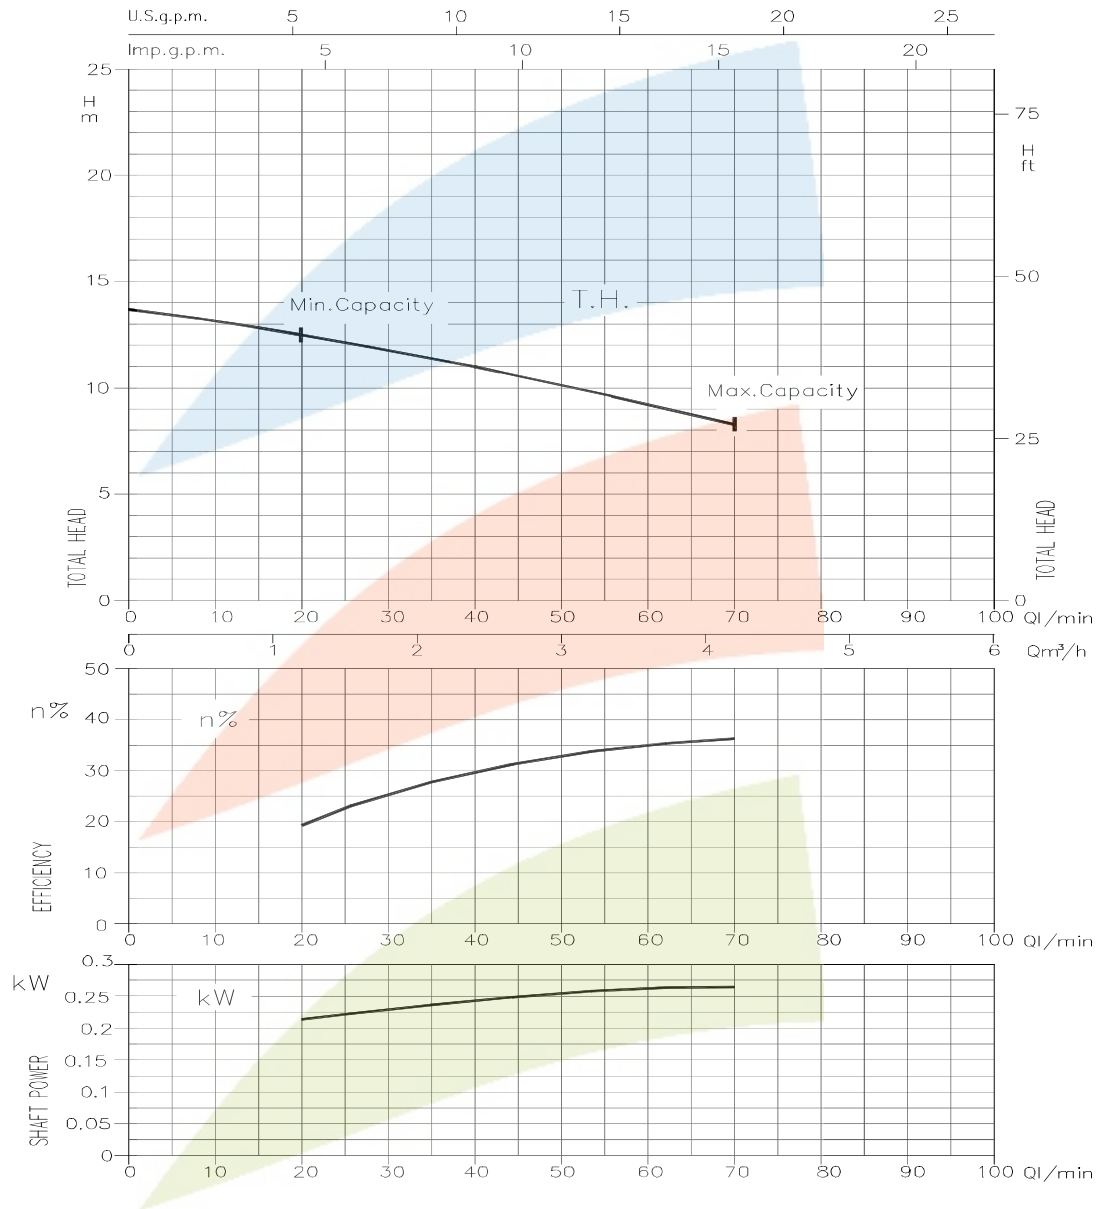


Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

LPS 32/25 (0.25 kW) - LPS 32/25M (0.25 kW) - Impeller diameter = 103 mm

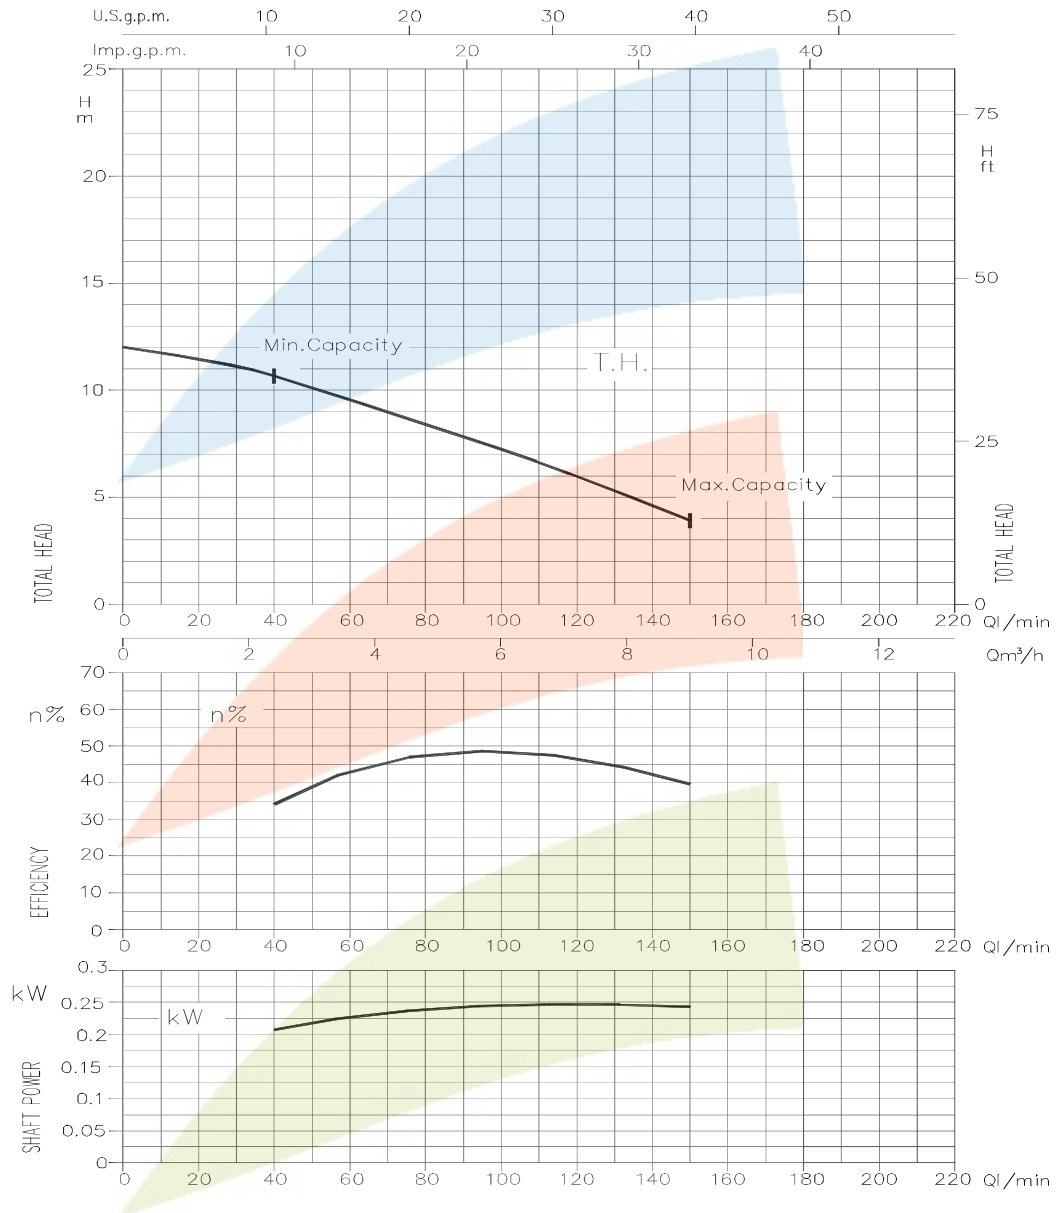

Rotation speed $\approx 2800 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


LPS 32/40 (0.4 kW) - LPS 32/40M (0.4 kW) - Impeller diameter = 124 mm

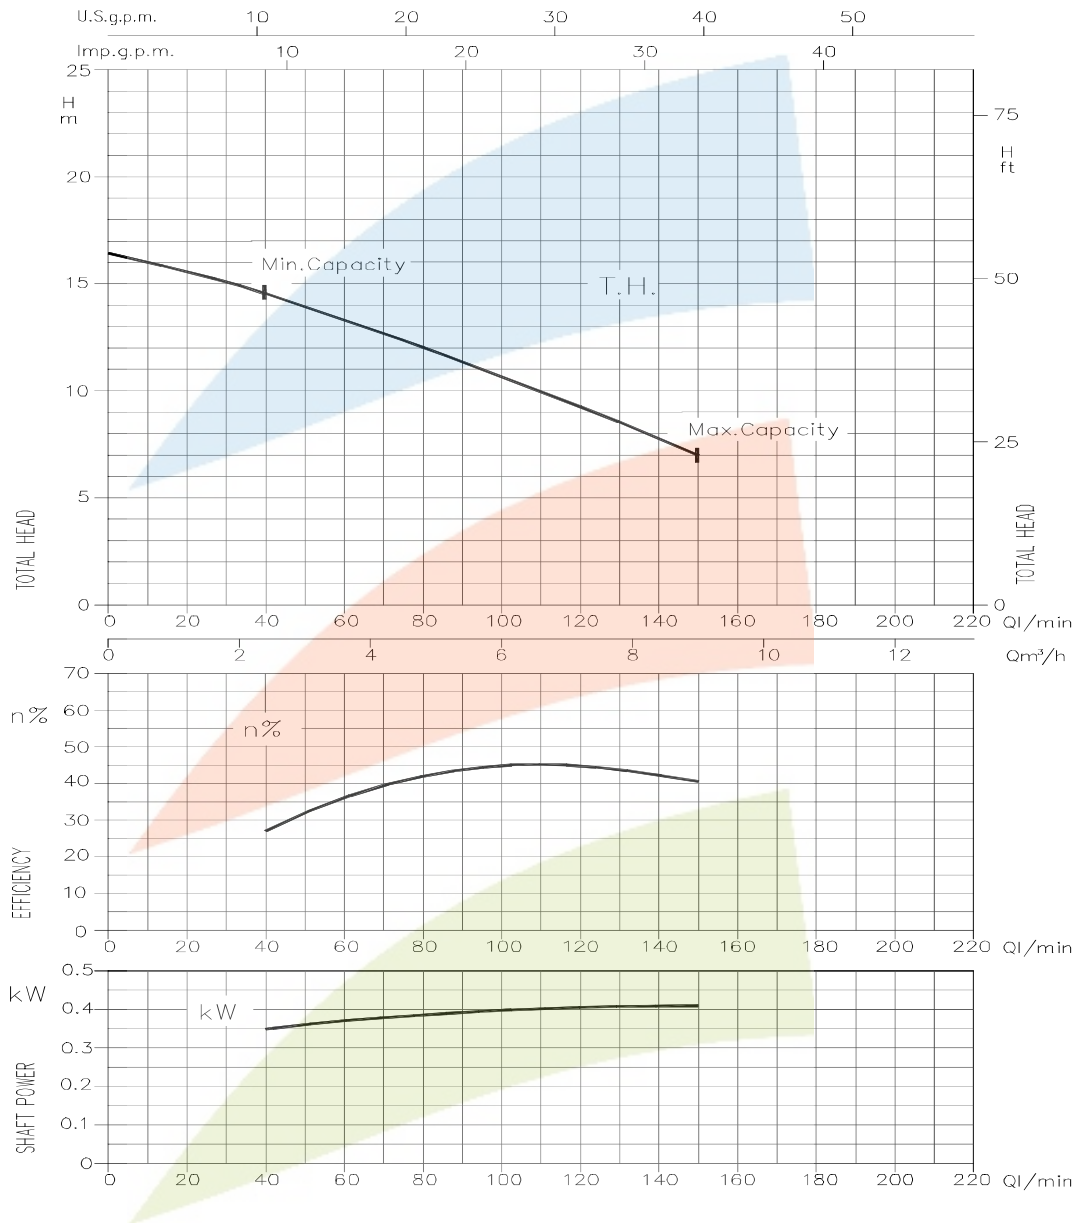

PRODUCT NOT AVAILABLE FOR THE EUROPEAN MARKET


Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

LPS 40/25 (0.25 kW) - LPS 40/25M (0.25 kW) MEI > 0.40 - Impeller diameter = 86 mm

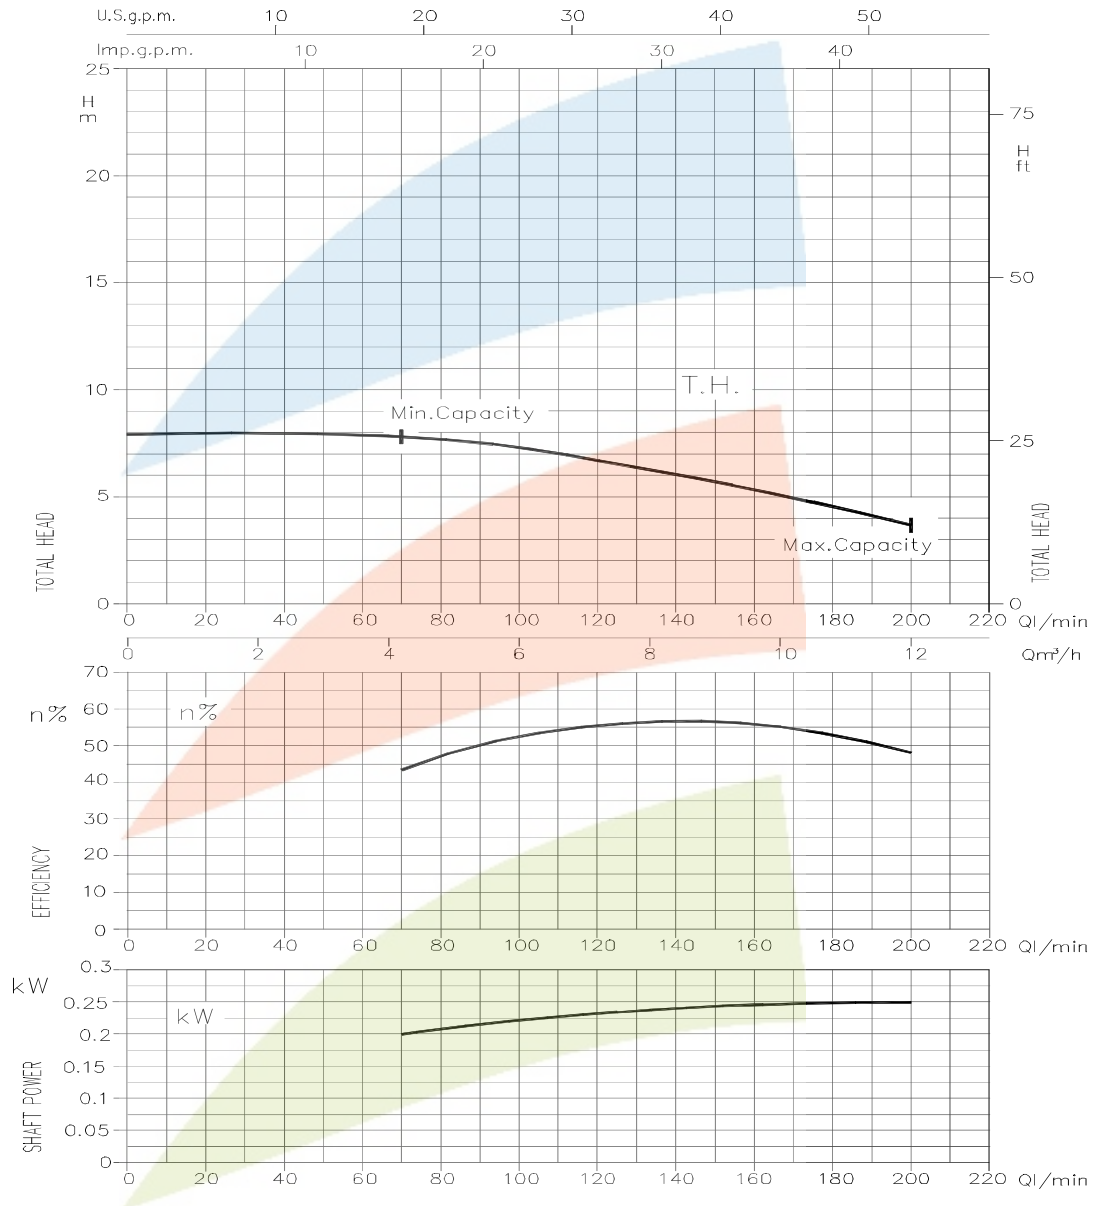

Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A


LPS 40/40 (0.4 kW) - LPS 40/40M (0.4 kW) - Impeller diameter = 103 mm

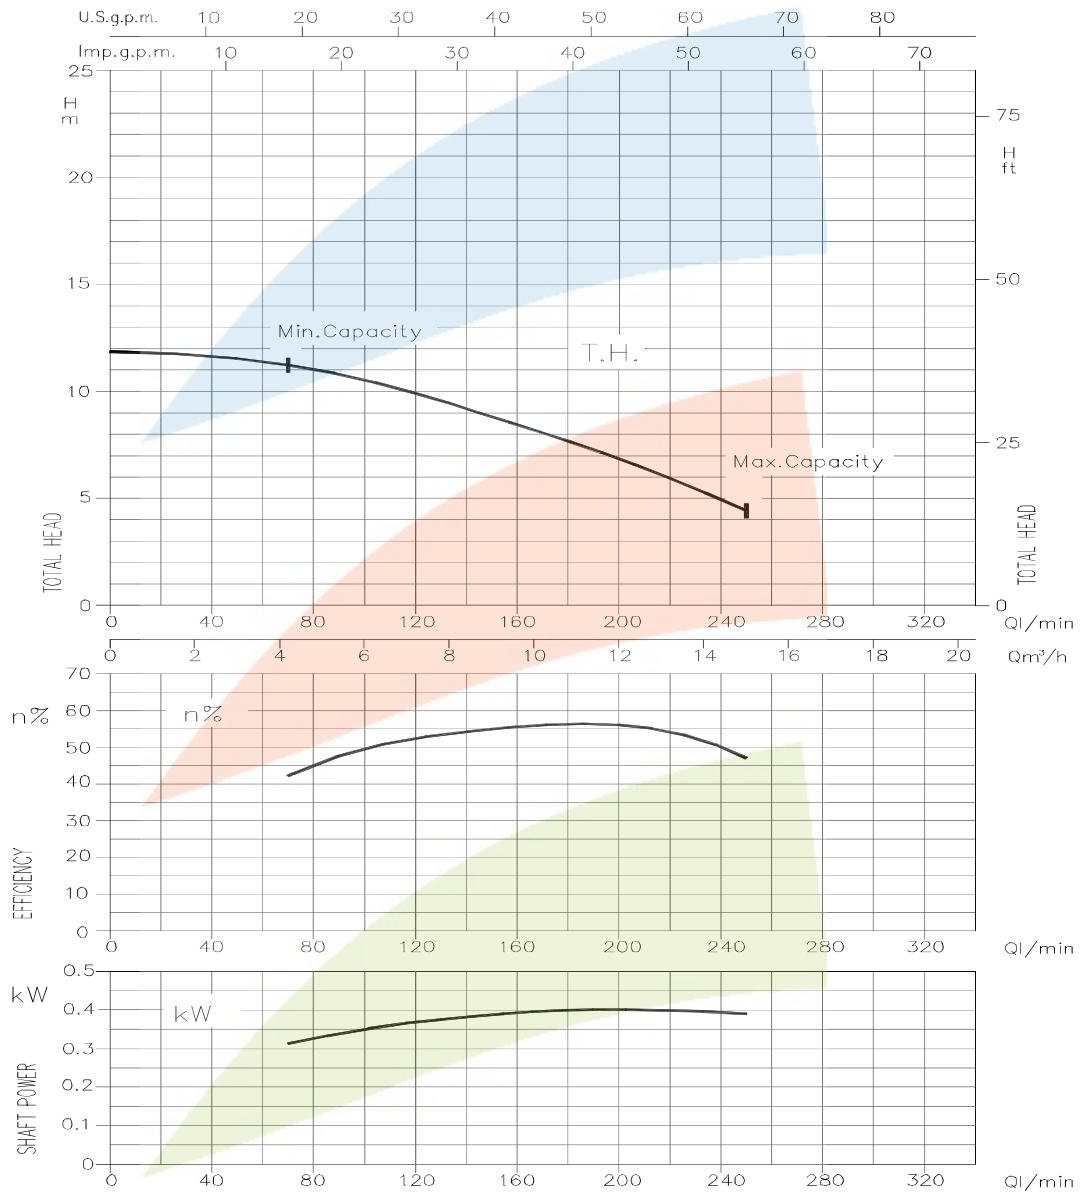

PRODUCT NOT AVAILABLE FOR THE EUROPEAN MARKET

Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A


LPS 40/75 (0.75 kW) - LPS 40/75M (0.75 kW) - Impeller diameter = 124 mm

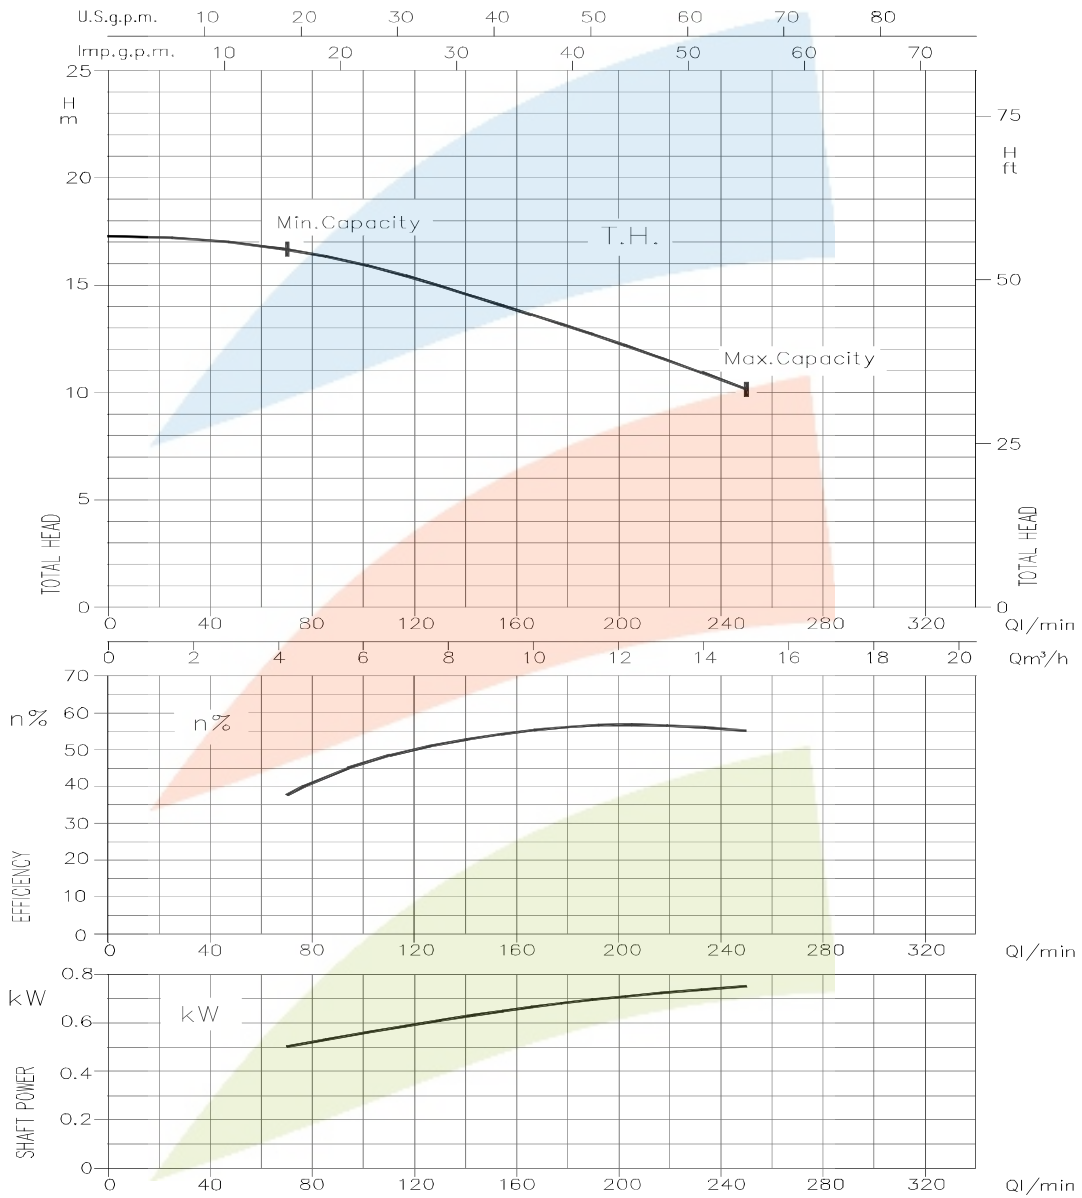

PRODUCT NOT AVAILABLE FOR THE EUROPEAN MARKET


Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

LPS 50/40 (0.4 kW) - LPS 50/40M (0.4 kW) MEI > 0.10 - Impeller diameter = 95 mm

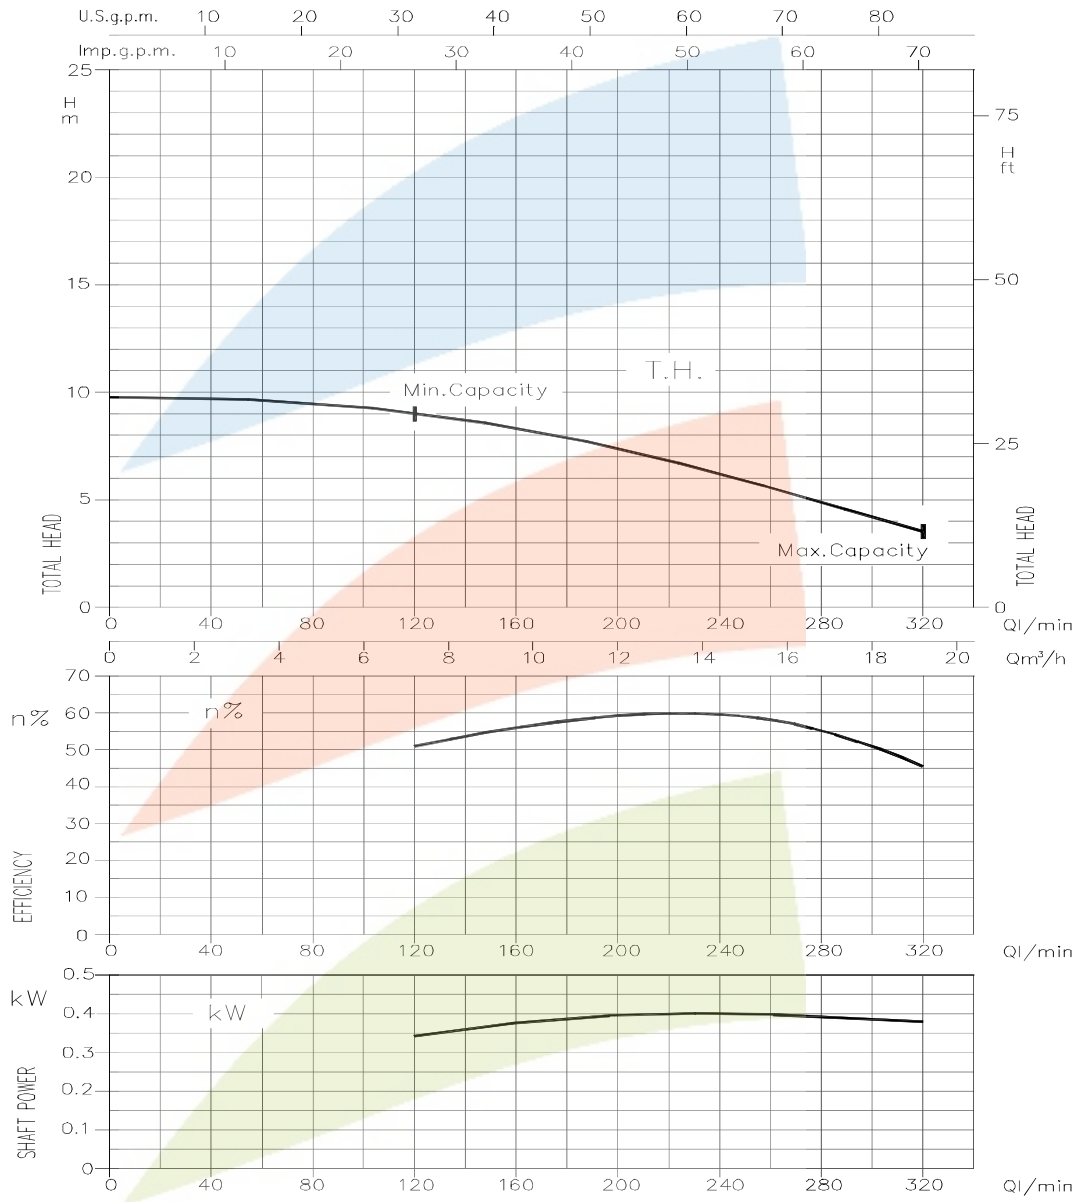


Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

LPS 50/75 (0.75 kW) - LPS 50/75M (0.75 kW) MEI > 0.10 - Impeller diameter = 114 mm

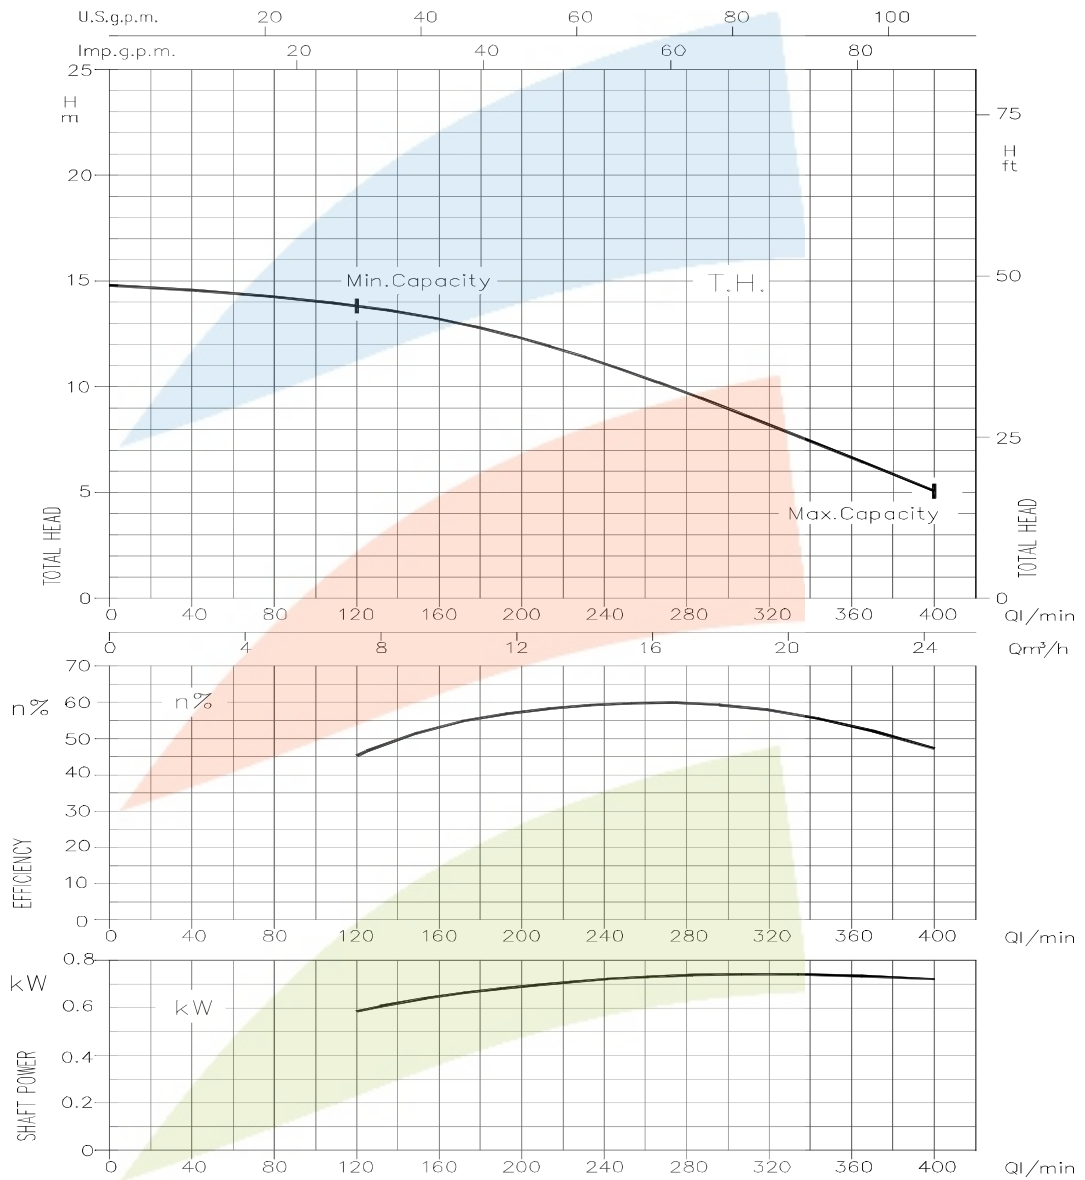

Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A

LPS 50/150 (1.5 kW) - LPS 50/150M (1.5 kW) MEI > 0.10 - Impeller diameter = 129 mm

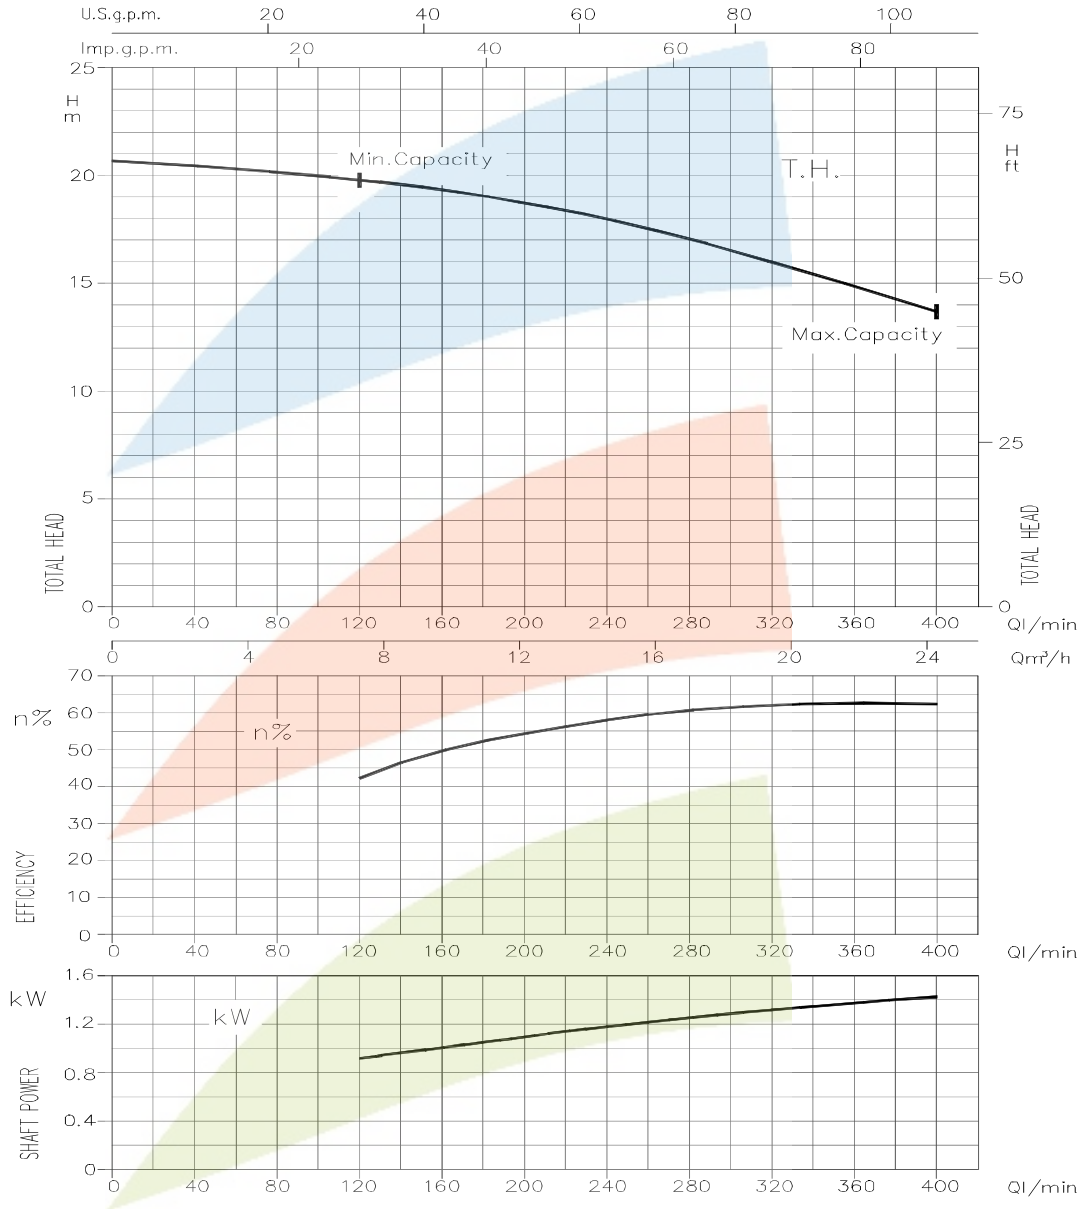

Rotation speed ≈ 2800 min⁻¹
 Test standard: ISO 9906 – Annex A