



MULTIGO 40/08 (0.60 kW) (IN-LINE) MEI > 0.60 - Impeller diameter = 104
MULTIGO 40/10 (0.75 kW) (IN-LINE) MEI > 0.60 - Impeller diameter = 104
MULTIGO 40/12 (0.90 kW) (IN-LINE) MEI > 0.60 - Impeller diameter = 104
MULTIGO 40/15 (1.10 kW) (IN-LINE) MEI > 0.60 - Impeller diameter = 104

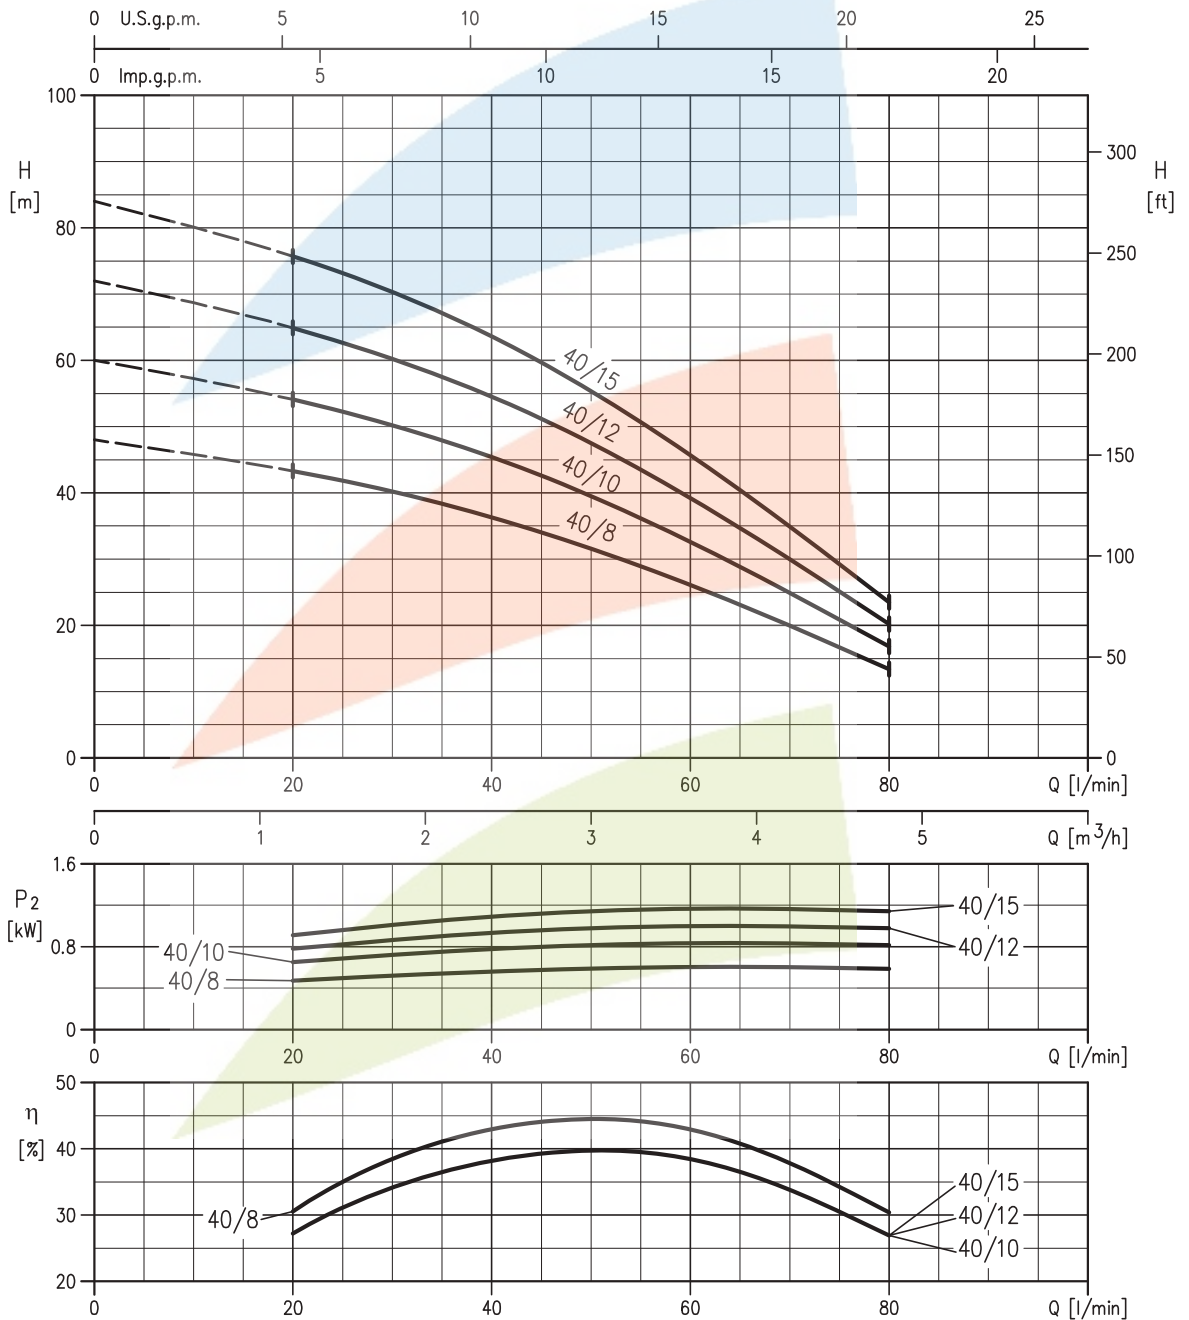

Rotation speed ≈ 2800 min⁻¹
 Test fluid: clean water at 20°C
 Test standard: ISO 9906 – Annex A

MULTIGO 80/12 (0.9 kW) (IN-LINE) MEI > 0.70 - Impeller diameter = 102
 MULTIGO 80/15 (1.1 kW) (IN-LINE) MEI > 0.70 - Impeller diameter = 102
 MULTIGO 80/20 (1.5 kW) - Impeller diameter = 102

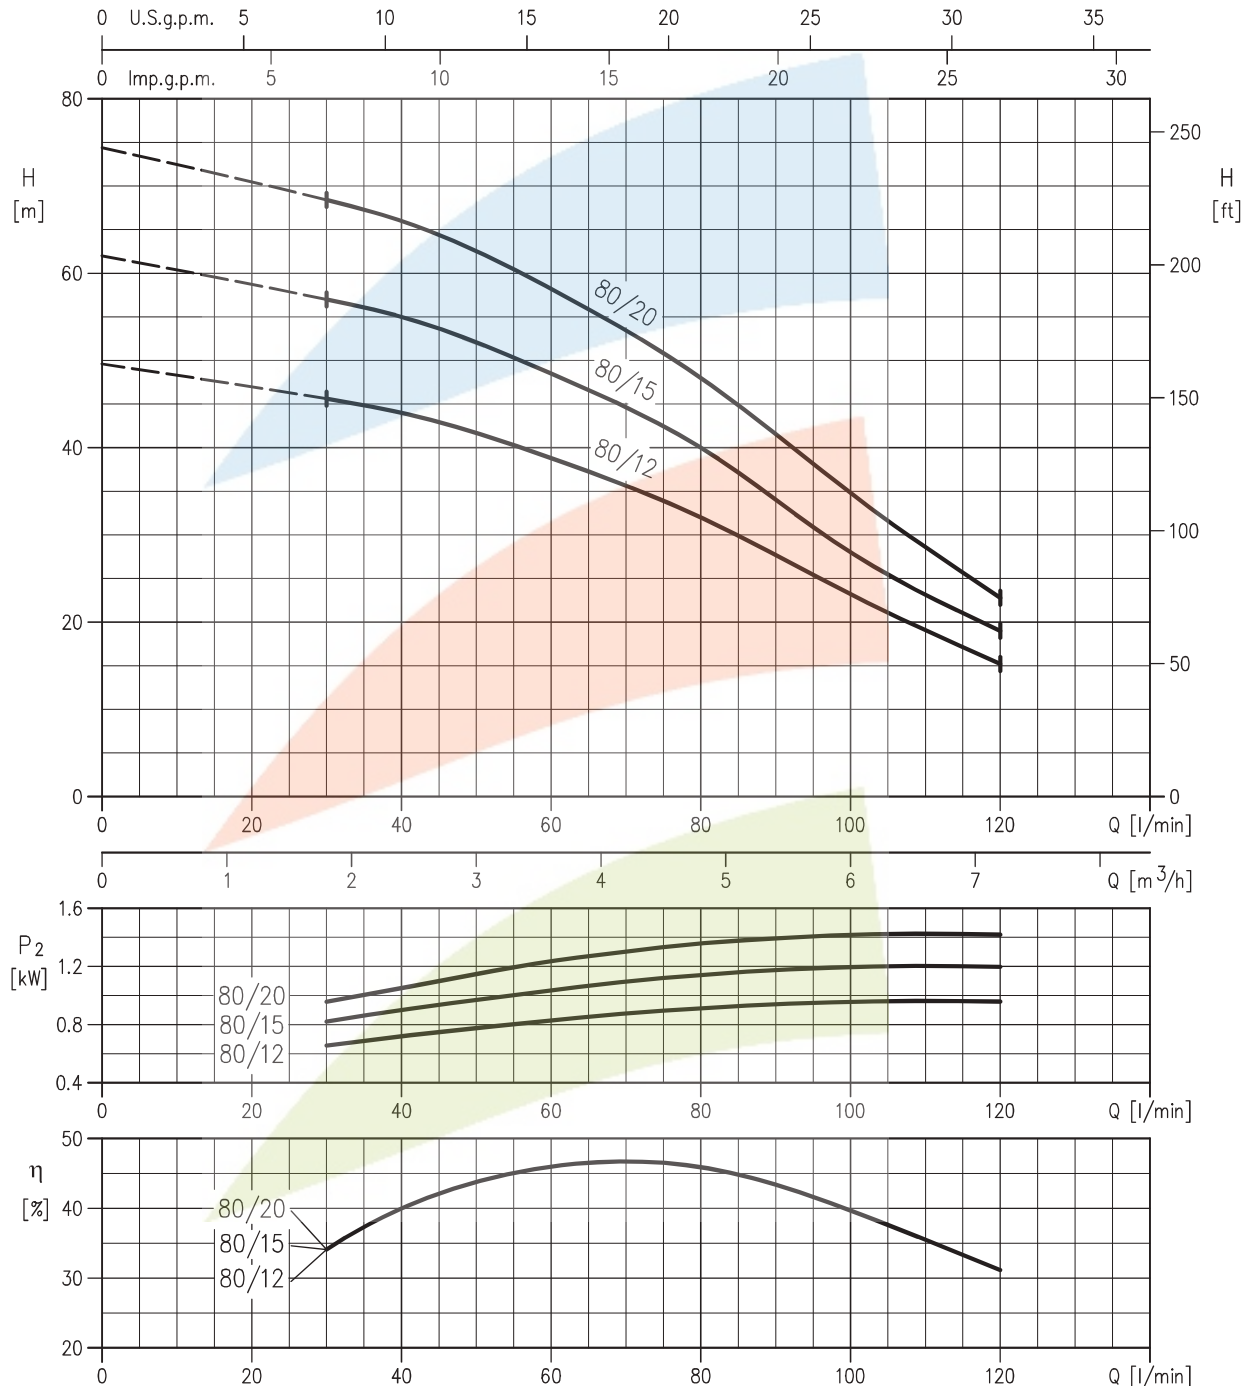

Rotation speed ≈ 2800 min⁻¹
 Test fluid: clean water at 20°C
 Test standard: ISO 9906 – Annex A