



PRA 0.50 (0.37 kW) - Impeller diameter = 60 mm

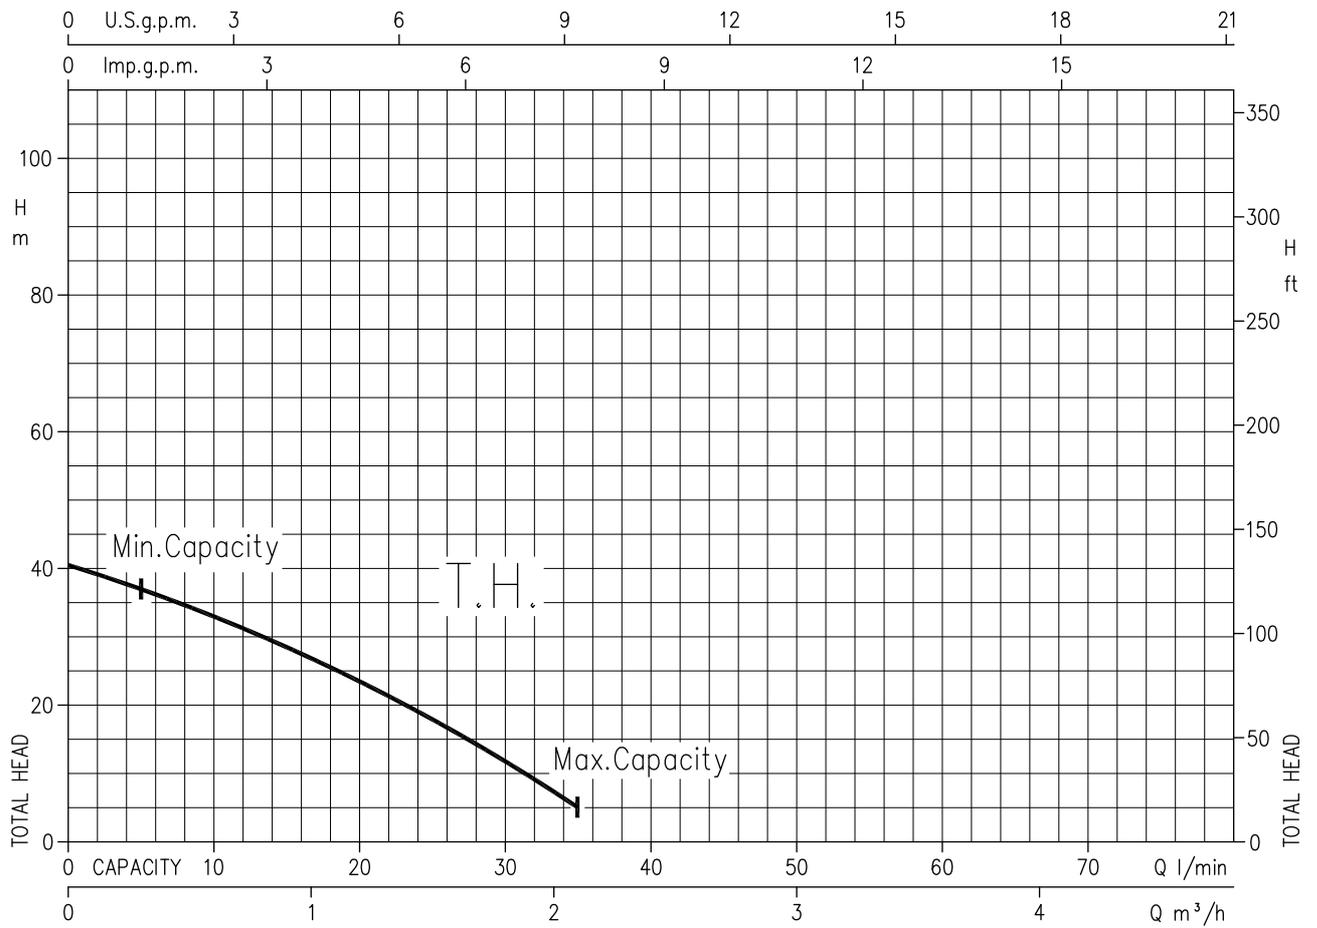


Rotation speed  $\approx 2850 \text{ min}^{-1}$   
Test standard: ISO 9906 – Annex A

PRA 0.80 (0.6 kW)- Impeller diameter = 70 mm

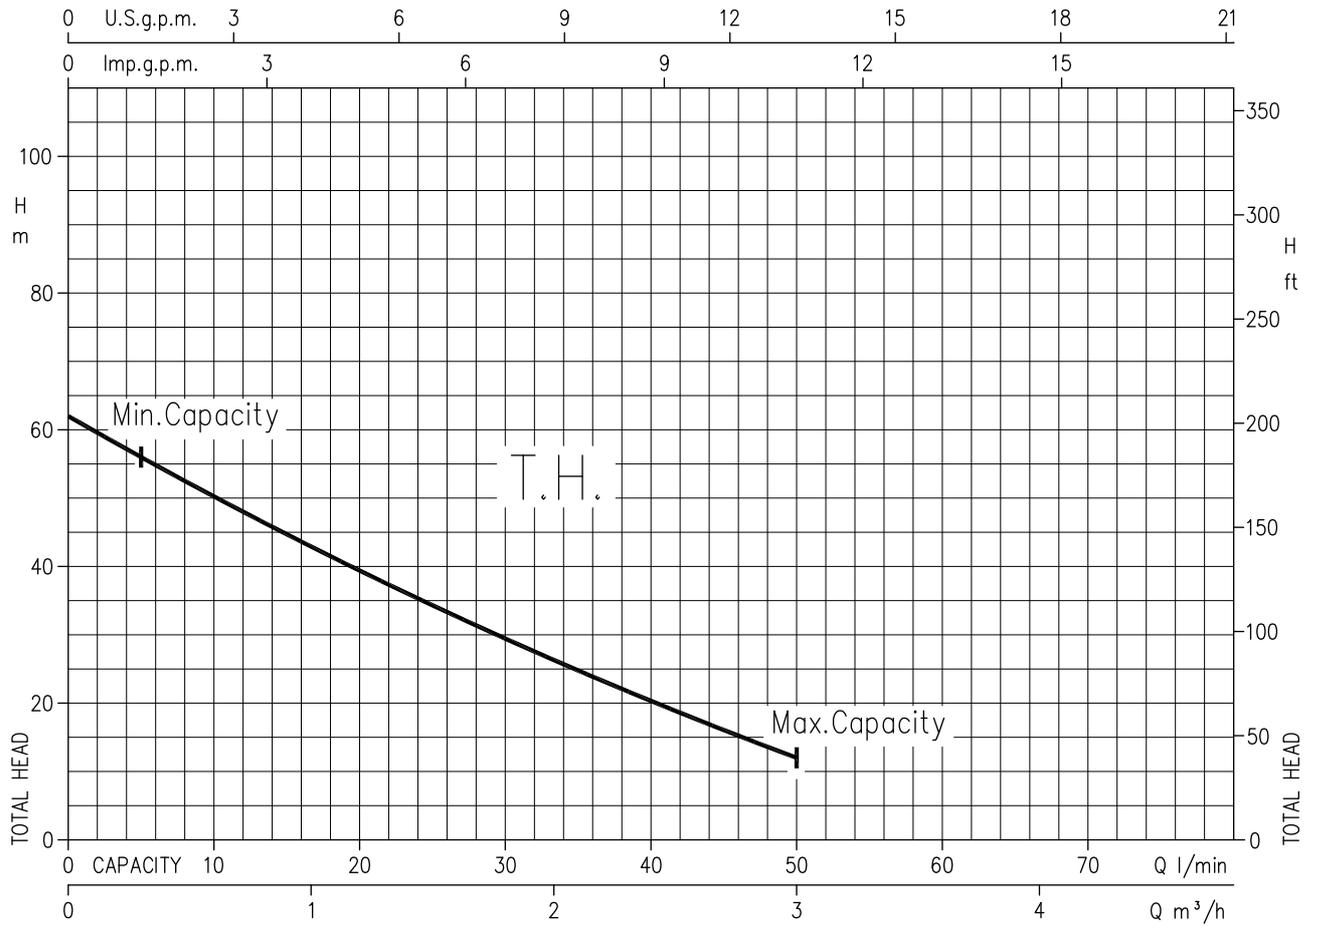


Rotation speed  $\approx 2850 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A

PRA 1.00 (0.75 kW)- Impeller diameter = 70.8 mm

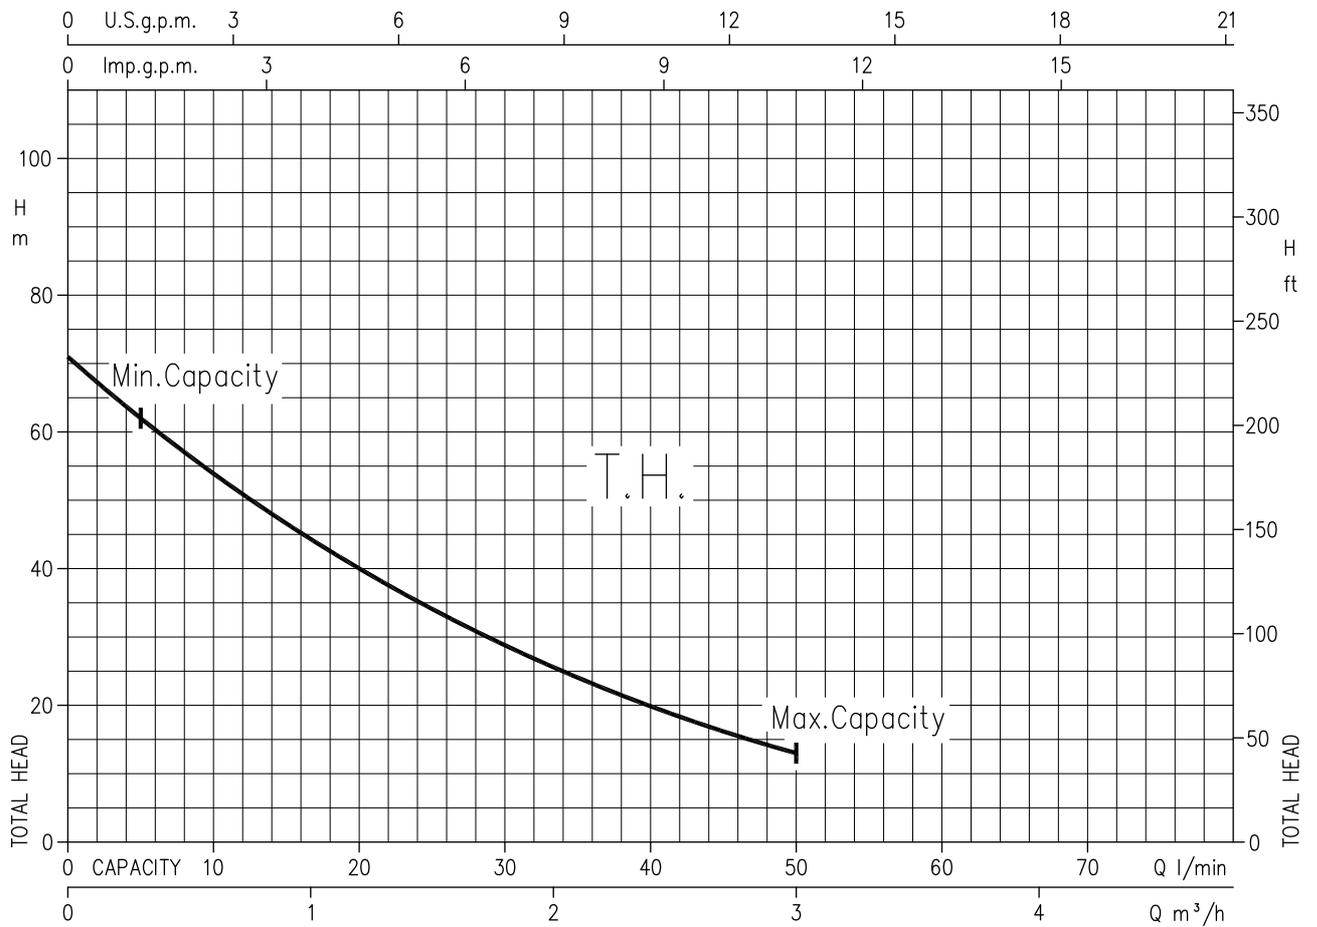


Rotation speed  $\approx 2850 \text{ min}^{-1}$   
Test standard: ISO 9906 – Annex A

PRA 1.50 (1.1 kW)- Impeller diameter = 77 mm

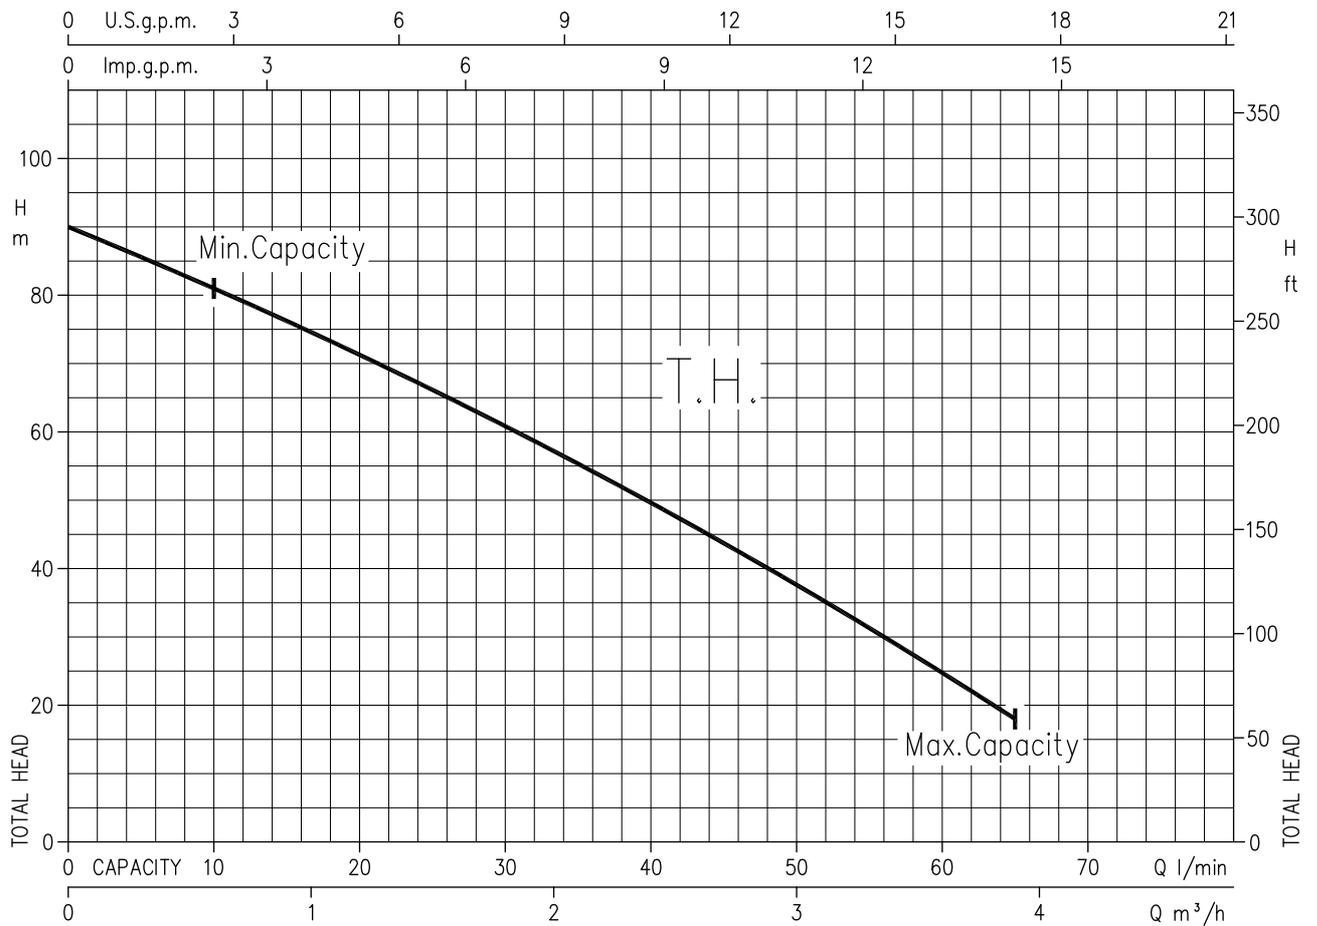

Rotation speed  $\approx 2850 \text{ min}^{-1}$   
Test standard: ISO 9906 – Annex A

PRA 2.00 (1.5 kW)- Impeller diameter = 78.2 mm

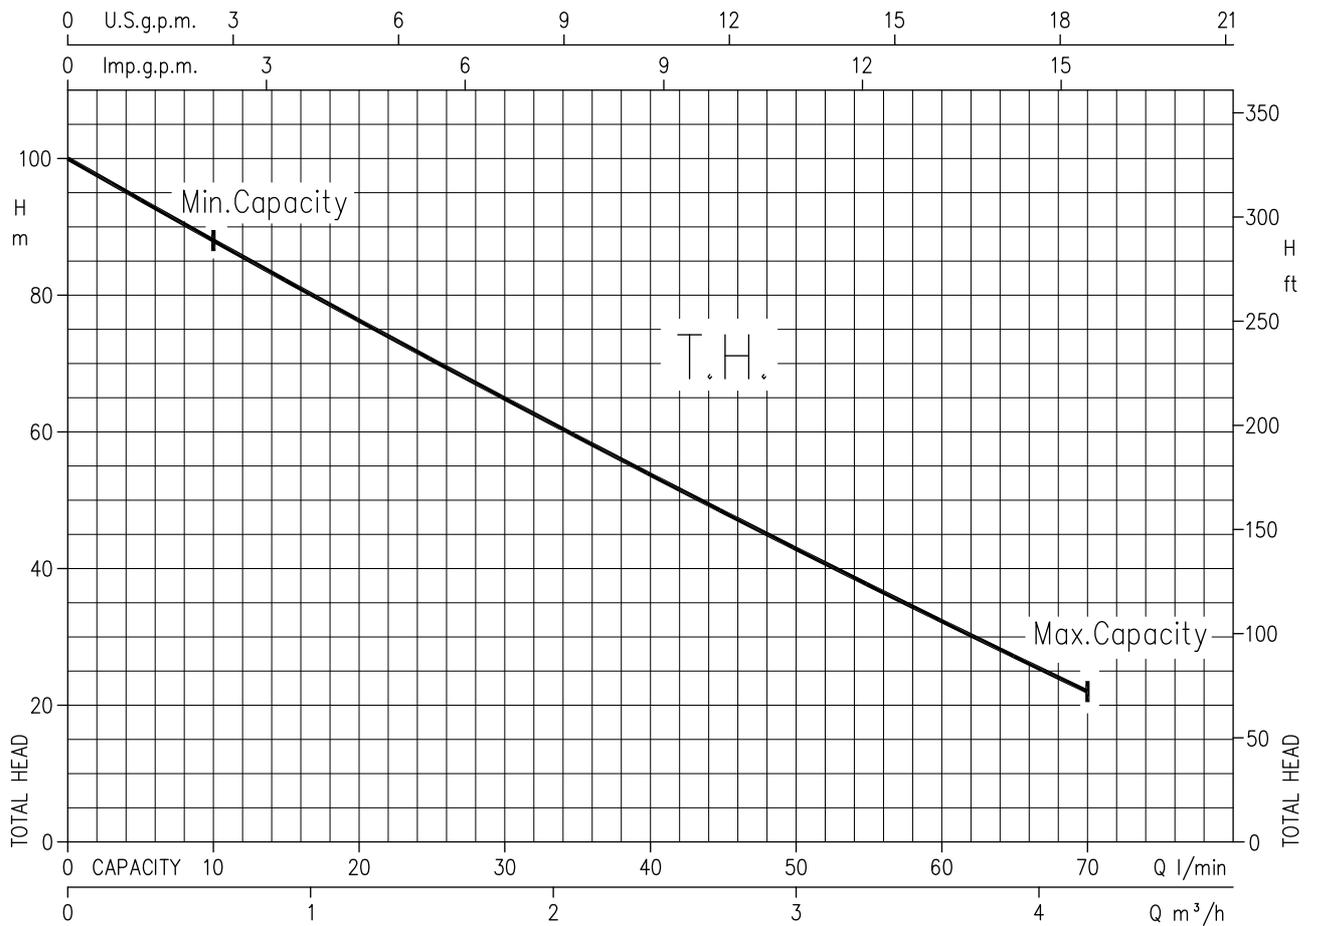

Rotation speed  $\approx 2850 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A