


Tensioner Device



Chain rider set P



Simplex «S»

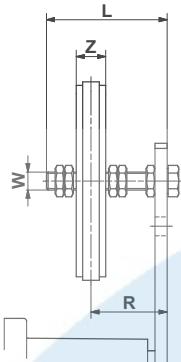

Duplex «D»

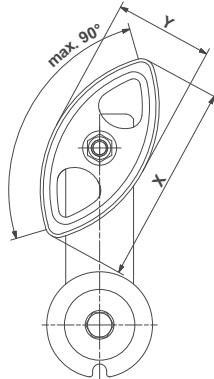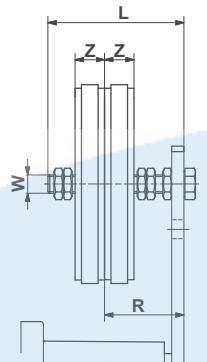

| Part no. | Type | Roller chain | | W | L | X | Y | Z | Torque hex nut 0.5 d [Nm] | suitable for size SE | Adjusting range R with SE | Weight [kg] |
|--------------------|------------------------|--------------|------------|-----|----|-----|----|------|---------------------------|----------------------|---------------------------|-------------|
| | | ANSI | DIN 8187 | | | | | | | | | |
| Simplex «S» | | | | | | | | | | | | |
| 06 550 001 | P $\frac{3}{8}$ "-8 S | 35 | ISO 06 B-1 | M8 | 45 | 74 | 37 | 10.2 | 11 | 11 | 19-34 | 0.05 |
| 06 550 002 | P $\frac{1}{2}$ "-10 S | 40 | ISO 08 B-1 | M10 | 55 | 96 | 48 | 13.9 | 20 | 15/18 | 23-41 | 0.10 |
| 06 550 003 | P $\frac{5}{8}$ "-10 S | 50 | ISO 10 B-1 | M10 | 55 | 126 | 63 | 16.6 | 20 | 18 | 24-39 | 0.12 |
| 06 550 004 | P $\frac{3}{4}$ "-12 S | 60 | ISO 12 B-1 | M12 | 80 | 148 | 72 | 19.5 | 35 | 27 | 30-61 | 0.18 |
| Duplex «D» | | | | | | | | | | | | |
| 06 560 001 | P $\frac{3}{8}$ "-8 D | 35 | ISO 06 B-2 | M8 | 45 | 74 | 37 | 10.2 | 11 | 11 | 25-30 | 0.07 |
| 06 560 002 | P $\frac{1}{2}$ "-10 D | 40 | ISO 08 B-2 | M10 | 55 | 96 | 48 | 13.9 | 20 | 15/18 | 30-34 | 0.12 |
| 06 560 003 | P $\frac{5}{8}$ "-10 D | 50 | ISO 10 B-2 | M10 | 70 | 126 | 63 | 16.6 | 20 | 18 | 34-46 | 0.17 |
| 06 560 004 | P $\frac{3}{4}$ "-12 D | 60 | ISO 12 B-2 | M12 | 80 | 148 | 72 | 19.5 | 35 | 27 | 40-52 | 0.26 |

For double sided use. Max. allowed chain speed 1.5 m/sec.



Material: POM-H.

Working temperature: -40 ° bis +100 °C.

If no other units are specified, the numbers given are in mm.

Tensioner Device

Chain rider P

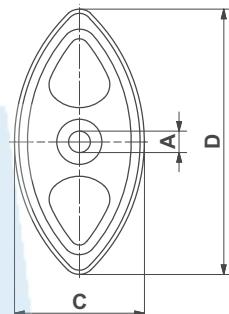

| Part no. | Type | Roller chain | | A | B | C | D | Weight [kg] |
|------------|-------------------|--------------|----------|----------------|------|----|-----|-------------|
| | | ANSI | DIN 8187 | | | | | |
| 06 540 001 | P $\frac{3}{8}$ " | 35 | ISO 06 B | 8 $^{+0.2}_0$ | 10.2 | 37 | 74 | 0.02 |
| 06 540 002 | P $\frac{1}{2}$ " | 40 | ISO 08 B | 10 $^{+0.2}_0$ | 13.9 | 48 | 96 | 0.03 |
| 06 540 003 | P $\frac{5}{8}$ " | 50 | ISO 10 B | 10 $^{+0.2}_0$ | 16.6 | 63 | 126 | 0.05 |
| 06 540 004 | P $\frac{3}{4}$ " | 60 | ISO 12 B | 12 $^{+0.2}_0$ | 19.5 | 72 | 148 | 0.07 |

For double sided use. Max. allowed chain speed 1.5 m/sec.

Material: POM-H.

Working temperature: -40 ° bis +100 °C.

If no other units are specified, the numbers given are in mm.