


a **xylem** brand

ESHS SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES



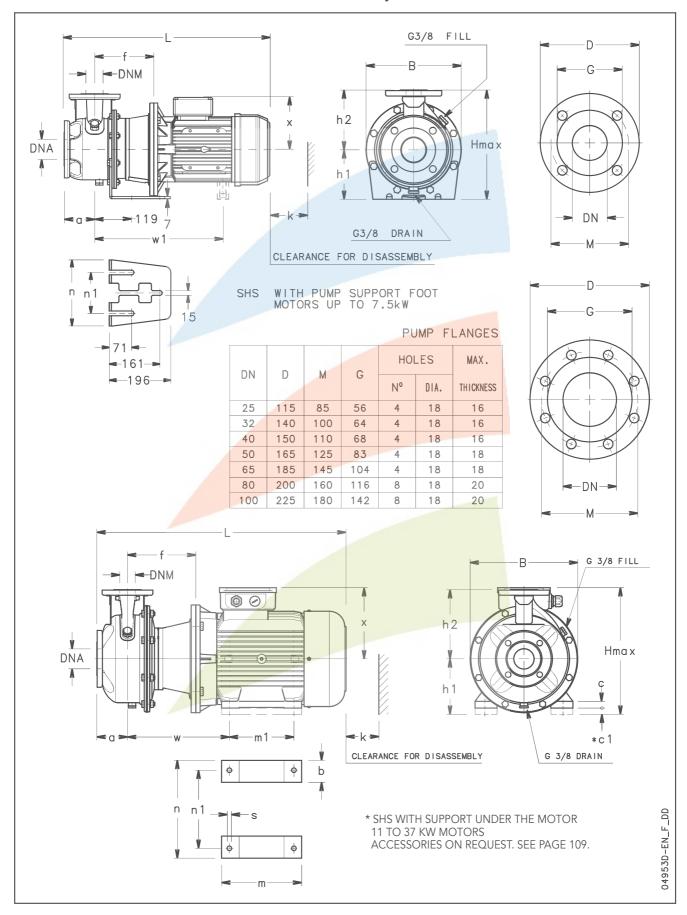

ESHS SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

PUMP TYPE			DIMENSIONS (mm)																		WEIGHT	
ESHS2	PUMP SUPPORT														В	Н	L	k				
	DNM	DNA	a	f	h2	w	w1	х	b	с	*c1	h1	m	m1	n	n1	s		max			kg
25-125/07/S	25	50	80	155	140	-	-	129	-	-	-	160	-	-	190	130	-	218	300	498	98	24
25-125/11/S	25	50	80	155	140	-	-	129	-	-	-	160	-	-	190	130	-	218	300	498	98	25
25-160/15/S	25	50	80	155	160	-	-	129	-	-	-	160	-	-	210	130	-	253	320	498	98	27
25-160/22/P	25	50	80	155	160	-	-	134	-	-	-	160	-	-	210	130	-	253	320	533	98	33
25-200/30/P	25	50	80	165	180	-	-	134	-	-	-	160	-	-	230	130	-	284	340	543	98	44
25-200/40/P	25	50	80	165	180	-	-	154	-	-	-	160		-	230	130	-	284	340	564	98	51
25-250/55/P	25	50	100	192	225	-	399	168	-	-	-	180	-	-	265	130	-	345	405	667	98	77
25-250/75/P	25	50	100	192	225	-	397	191	-	-	-	180	-	-	265	130	-	345	405	659	98	91
25-250/110/P	25	50	100	222	225	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	98	130
32-125/07/S	32	50	80	155	140	-	-	129	-	-	-	112	-	-	190	130	I -	218	252	498	98	24
32-125/11/S	32	50	80	155	140	-	-4	129	-	-	-	112	-	-	190	130	-	218	252	498	98	25
32 - 160/15/S	32	50	80	155	160	- /	-	129	-	-	-	132	-	-	210	130	-	253	292	498	98	27
32-160/22/P	32	50	80	155	160	1/4	_	134	_	_	_	132	_	-	210	130	-	253	292	533	98	33
32-200/30/P	32	50	80	165	180	_	-	134	-	-	-	160	-	-	230	130	-	284	340	543	98	44
32-200/40/P	32	50	80	165	180	_	_	154	-		-	160	_	_	230	130	_	284	340	564	98	51
32-250/55/P	32	50	100	192	225	_	399	168	-	-	_	180	_	_	265	130	-	345	405	667	98	77
32-250/75/P	32	50	100	192	225		397	191	_	_	_	180	_	_	265	130	_	345	405	659	98	91
32-250/110/P	32	50	100	222	225	330	_	240	49	5	20	180	304	210	304	254	15	350	420	816	98	130
40-125/11/S	40	65	80	155	140	_	_	129	-	_	_	112	-	210	190	130	-	218	252	498	100	26
40-125/15/S	40	65	80	155	140	_	_	129	_	_	_	112	_	_	190	130		218	252	498	100	26
40-125/22/P	40	65	80	155	140	_	_	134		_	_	112	_	_	190	130		218	252	533	100	32
		65	80	165			-	134	-			132				130		253	292	543	100	
40-160/30/P	40				160	-	-		-	-	-		-	-	210		_					42
40-160/40/P	40	65	80	165	160	-	-	154	-	-	-	132	-	-	210	130	-	253	292	564	100	48
40-200/55/P	40	65	100	192	180	-/	399	168	-	-	-	160	-	-	230	130		300	340	667	100	63
40-200/75/P	40	65	100	192	180	-	397	191	-	-	-	160	-	-	230	130	- 4.5	300	351	659	100	80
40-250/110A/P	40	65	100	222	225	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	107	129
40-250/110/P	40	65	100	222	225	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	107	129
40-250/150/P	40	65	100	222	225	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	107	142
50-125/22/P	50	65	100	155	160	-	-	134	-	-	-	132	-	-	210	130		253	292	553	104	36
50-125/30/P	50	65	100	165	160	-	-	134	-	-	-	132		-	210	130	-	253	292	563	104	37
50-125/40/P	50	65	100	165	160	-	-	154	-	-	-	132	-	-	210	130	-	253	292	584	104	48
50-160/55/P	50	65	100	192	180	-	399	168	-	-	-	160	-	-	210	130	-	300	340	667	104	62
50-160/75/P	50	65	100	192	180	-	397	191	-	-	-	160	-	-	210	130	-	300	351	659	104	81
50-200/110A/P	50	65	100	222	200	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	104	126
50-200/110/P	50	65	100	222	200	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	104	130
50-250/150/P	50	65	100	222	225	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	107	148
50-250/185/P	50	65	100	222	225	330	-	240	49	5	20	180	304	254	304	254	15	350	420	816	107	156
50-250/220/P	50	65	100	222	225	330	-	240	49	5	20	180	304	254	304	254	15	350	420	816	107	162
65-160/40/P	65	80	100	165	200	-	-	154	-	-	-	160	-	-	245	130	-	310	360	584	130	60
65-160/55/P	65	80	100	192	200	-	399	168	-	-	-	160	-	-	245	130	-	310	360	667	130	78
65-160/75/P	65	80	100	192	200	-	397	191	-	-	-	160	-	-	245	130	-	310	360	659	130	93
65-160/110A/P	65	80	100	222	200	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	130	116
65-160/110/P	65	80	100	222	200	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	130	120
65-200/150/P	65	80	100	222	225	330	-	240	49	5	20	180	304	210	304	254	15	350	420	816	130	147
65-200/185/P	65	80	100	222	225	330	-	240	49	5	20	180	304	254	304	254	15	350	420	816	130	153
65-200/220/P	65	80	100	222	225	330	-	240	49	5	20	180	304	254	304	254	15	350	420	816	130	167
65-250/300/L	65	80	100	228	250	361	-	285	69	27	-	200	355	305	408	318	19	408	485	999	140	260
65-250/370/L	65	80	100	228	250	361	_	285	69	27	-	200	355	305	408	318	19	408	485	999	140	276
80-160/110/P	80	100	125	222	225	330	-	240	49	5	20	180	304	210	304	254			420	841	160	116
80-160/150/P	80	100	125	222	225	330	_	240	49	5	20	180	304	210	304	254	15	350	420	841	160	152
80-160/185/P	80	100	125	222	225	330	_	240	49	5	20	180	304	254	304	254	15	350	420	841	160	160
80-200/220/P	80	100	125	222	250	330	_	240	49	5	20	180	304	254	304	254	15	350	430	841	160	162
80-200/300/L	80	100	125	228	250	361	_	285	69	27	_	200	355	305	408	318	19	408	485	999	160	260
		100	140	220	200	201		200		2/		200		202	700	210		-100	700	222	100	200

^{*} Motor shim on request ESHS_2p50-en_b_td