


# Bridas prensadas de acero inoxidable

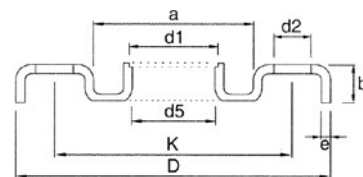


## Brida prensada con cuello para soldar PN-10

DN	d1/d5	D	d1	k	a	e	b	d2	n°
40	43x40	150	54	110	77	4	17,5	17,5	4
50	53x50	165	65	125	91	4	19,5	17,5	4
65	73x70	185	81	145	108	4	21,0	17,5	8
80	84x80	200	94	160	123	5	22,0	17,5	8
100	104x100	220	119	180	141	6	23,0	17,5	8
125	129x125 123x120	250	145	210	168	6	25,0	17,5	8
150	154x150	285	173	240	192	6	27,0	21,5	8
200	204x200	340	225	295	245	6	31,0	21,5	8
250	254x250	395	279	350	295	6	31,0	22,0	12
300	304x300	445	329	400	345	6	34,0	22,0	12
350	355,6	505	363	460	393	6	36,0	22,0	16
400	406,4	565	414	515	443	6	38,0	22,0	16

## Brida prensada con cuello para soldar PN-16

DN	d1/d5	D	d1	k	a	e	b	d2	n°
200	204x200	340	225	295	245	6	31,0	22,0	12
250	254x250	405	279	355	295	6	31,0	26,0	12
300	304x300	460	329	410	345	6	34,0	26,0	12
350	355,6	520	363	470	393	8	36,0	26,0	16
400	406,4	580	414	525	443	8	38,0	30,0	16

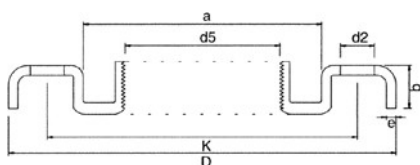

## Brida prensada roscada PN-10

DN	d5	D	k	a	e	b	d2	n°
25	1"	115	85	53	3	16,0	13,5	4
32	1 1/4"	140	100	68	3	16,0	17,5	4
40	1 1/2"	150	110	77	4	17,5	17,5	4
50	2"	165	125	91	4	19,5	17,5	4
65	2 1/2"	185	145	108	4	21,0	17,5	4
80	3"	200	160	123	5	22,0	17,5	8
100	4"	220	180	141	6	23,0	17,5	8
125	5"	250	210	168	6	25,0	17,5	8
150	6"	285	240	192	6	27,0	21,5	8
200	8"	340	295	245	8	31,0	21,5	8